

Low frequency ground wire choke, fully potted resin



See below:

Approvals and Compliances

Description

- Ground wire chokes (ground line chokes)
- Wire leads
- Fully potted resin

Applications

- Separating the main earth line to periphery devices
- This type of chokes permits the building of a system free of ground wire loops

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

| | |
|---------------------------|---------------------|
| Rated Current | 16 - 25A @ Ta 40 °C |
| Rated inductance | 4 mH |
| Power Operating Frequency | < 5 MHz |
| Terminal Type | Wire leads |
| Material | UL 94V-0 |
| Sealing Compound | UL 94V-0 |

| | |
|---------------------------|-------------------------------|
| Isolation Voltage | 2 kV eff., winding to ambient |
| Climatic Category | 25/100/21 acc. to IEC 60068-1 |
| Allowable Operation Temp. | -25 °C to 100 °C |


Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.






Application standards

Application standards where the product can be used

| Organization | Design | Standard | Description |
|---|--------------------------------|----------------|---|
|  | Suitable for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |

Compliances



The product complies with following Guide Lines

| Identification | Details | Initiator | Description |
|---|--|-------------|---|
|  | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | UKCA declaration of conformity | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008. |
|  | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
|  | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
|  | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

Dimension [mm]

Case 25

Case 40

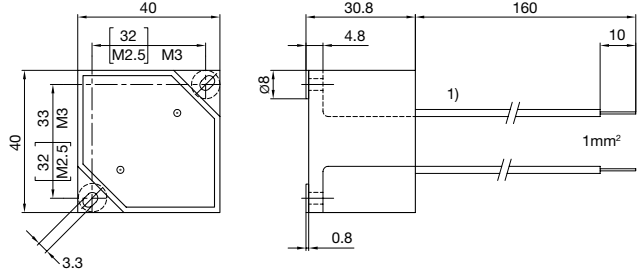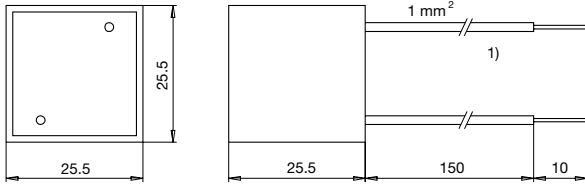

1) yellow/green



Variants

| I_n [A] | L_n [mH] | R_{cu} [mΩ] | f_{RES} [MHz] | Weight [g] | Packing unit [pcs.] | Order Number |
|-----------|------------|---------------|-----------------|------------|---------------------|--------------|
| 16 | 4 | 27 | 0.3 | 42g | 50 | DEN-25-0001 |
| 25 | 4 | 10.5 | 0.3 | 120g | 10 | DEN-40-0001 |

Availability for all products can be searched real-time: <https://www.schurter.com/en/info-center/support-tools/stock-check-distributors>

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View DEN-25-0001 on WIN SOURCE](#)
-  [Schurter Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management