

## Ultra-Configurable Multiple-Function Gate With 3-State Output

Check for Samples: [SN74LVC1G99](#)

### FEATURES

- Available in Texas Instruments NanoFree™ Package
- Supports 5-V  $V_{CC}$  Operation
- Inputs Accept Voltages to 5.5 V
- Supports Down Translation to  $V_{CC}$
- Max  $t_{pd}$  of 6.7 ns at 3.3 V
- Low Power Consumption, 10- $\mu$ A Max  $I_{CC}$
- $\pm 24$ -mA Output Drive at 3.3 V
- Offers Nine Different Logic Functions in a Single Package
- $I_{off}$  Supports Live Insertion, Partial-Power-Down Mode, and Back-Drive Protection
- Input Hysteresis Allows for Slow Input Transition Time and Better Noise Immunity at Input
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

### DESCRIPTION

The SN74LVC1G99 device is operational from 1.65 V to 5.5 V.


The SN74LVC1G99 device features configurable multiple functions with a 3-state output. The output is disabled when the output-enable ( $\overline{OE}$ ) input is high. When  $\overline{OE}$  is low, the output state is determined by 16 patterns of 4-bit input. The user can choose logic functions, such as MUX, AND, OR, NAND, NOR, XOR, XNOR, inverter, and buffer. All inputs can be connected to  $V_{CC}$  or GND.

This device functions as an independent inverter, but because of Schmitt action, it has different input threshold levels for positive-going ( $V_{T+}$ ) and negative-going ( $V_{T-}$ ) signals.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

This device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

NanoFree™ package technologies are a major breakthrough in IC packaging concepts, using the die as the package.

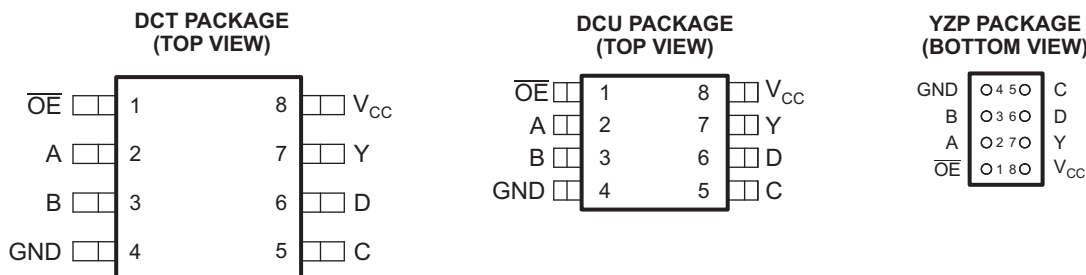

See mechanical drawings for dimensions.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

NanoFree is a trademark of Texas Instruments.




These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

**Function Table**

| INPUTS          |        |        |        |        | OUTPUT |
|-----------------|--------|--------|--------|--------|--------|
| $\overline{OE}$ | D      | C      | B      | A      | Y      |
| L               | L      | L      | L      | L      | L      |
| L               | L      | L      | L      | H      | H      |
| L               | L      | L      | H      | L      | L      |
| L               | L      | L      | H      | H      | H      |
| L               | L      | H      | L      | L      | L      |
| L               | L      | H      | L      | H      | L      |
| L               | L      | H      | H      | L      | H      |
| L               | L      | H      | H      | H      | H      |
| L               | H      | L      | L      | L      | H      |
| L               | H      | L      | L      | H      | L      |
| L               | H      | L      | H      | L      | H      |
| L               | H      | L      | H      | H      | L      |
| L               | H      | H      | L      | L      | H      |
| L               | H      | H      | L      | H      | H      |
| L               | H      | H      | H      | L      | L      |
| L               | H      | H      | H      | H      | L      |
| H               | H or L | H or L | H or L | H or L | Z      |


**Logic Diagram (Positive Logic)**

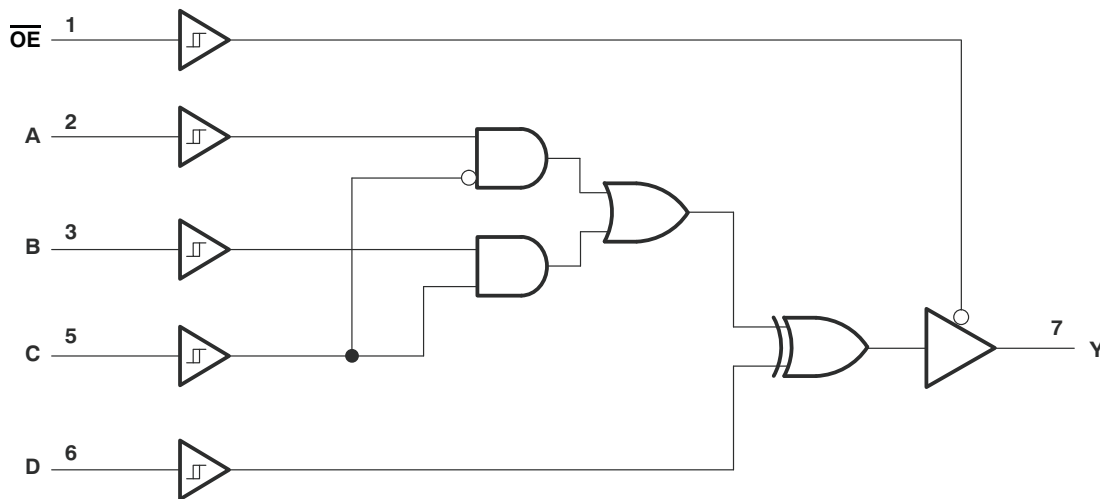

**Function Selection Table**


| PRIMARY FUNCTION                               | COMPLEMENTARY FUNCTION                    | PAGE |
|--|---|------|
| 3-state buffer                                 |   | 3    |
| 3-state inverter                               |   | 3    |
| 3-state 2-in-1 data selector MUX               |   | 4    |
| 3-state 2-in-1 data selector MUX, inverted out |   | 4    |
| 3-state 2-input AND                            | 3-state 2-input NOR, both inputs inverted | 5    |
| 3-state 2-input AND, one input inverted        | 3-state 2-input NOR, one input inverted   | 5    |
| 3-state 2-input AND, both inputs inverted      | 3-state 2-input NOR                       | 5    |
| 3-state 2-input NAND                           | 3-state 2-input OR, both inputs inverted  | 6    |
| 3-state 2-input NAND, one input inverted       | 3-state 2-input OR, one input inverted    | 6    |
| 3-state 2-input NAND, both inputs inverted     | 3-state 2-input OR                        | 6    |
| 3-state 2-input XOR                            |   | 7    |
| 3-state 2-input XNOR                           | 3-state 2-input XOR, one input inverted   | 7    |

**3-State Buffer Functions Available**

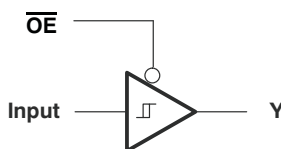

| FUNCTION       | $\overline{OE}$ | A      | B      | C      | D     |
|----------------|-----------------|--------|--------|--------|-------|
| 3-state buffer | L               | Input  | H or L | L      | L     |
|                |                 | H or L | Input  | H      | L     |
|                |                 | L      | H      | Input  | L     |
|                |                 | H      | L      | Input  | H     |
|                |                 | H      | H or L | L      | Input |
|                |                 | H or L | L      | H      | Input |
|                |                 | L      | L      | H or L | Input |

**3-State Inverter Functions Available**

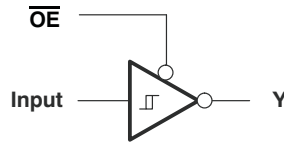



| FUNCTION       | $\overline{OE}$ | A      | B      | C      | D     |
|----------------|-----------------|--------|--------|--------|-------|
| 3-state buffer | L               | Input  | H or L | L      | H     |
|                |                 | X      | Input  | H      | H     |
|                |                 | L      | H      | Input  | H     |
|                |                 | H      | L      | Input  | L     |
|                |                 | H      | H or L | L      | Input |
|                |                 | H or L | H      | H      | Input |
|                |                 | H      | H      | H or L | Input |

**3-State MUX Functions Available**





| FUNCTION  | $\overline{OE}$ | A       | B       | C                                      | D |
|---|-----------------|---------|---------|--|---|
| 3-state 2-to-1, data selector MUX               | L               | Input 1 | Input 2 | $\overline{\text{Input 1}}$ or Input 2 | L |
| 3-state 2-to-1, data selector MUX               |                 | Input 2 | Input 1 | $\overline{\text{Input 2}}$ or Input 1 | L |
| 3-state 2-to-1, data selector MUX, inverted out |                 | Input 1 | Input 2 | $\overline{\text{Input 1}}$ or Input 2 | H |
| 3-state 2-to-1, data selector MUX, inverted out |                 | Input 2 | Input 1 | $\overline{\text{Input 2}}$ or Input 1 | H |



3-State AND/NOR/OR Functions Available

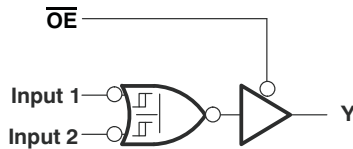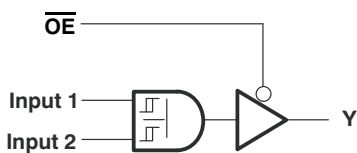



| NO. OF INPUTS | AND/NAND FUNCTION | OR/NOR FUNCTION | $\overline{OE}$ | A | B       | C       | D |
|---------------|-------------------|-----------------|-----------------|---|---------|---------|---|
| 2             | 3-state AND       | 3-state NOR     | L               | L | Input 1 | Input 2 | L |
| 2             | 3-state AND       | 3-state NOR     |                 | L | Input 2 | Input 1 | L |

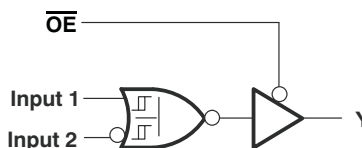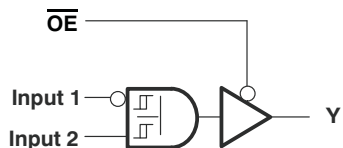

| NO. OF INPUTS | AND/NAND FUNCTION | OR/NOR FUNCTION | $\overline{OE}$ | A       | B       | C       | D |
|---------------|-------------------|-----------------|-----------------|---------|---------|---------|---|
| 2             | 3-state AND       | 3-state NOR     | L               | Input 2 | L       | Input 1 | L |
| 2             | 3-state AND       | 3-state NOR     |                 | H       | Input 1 | Input 2 | H |

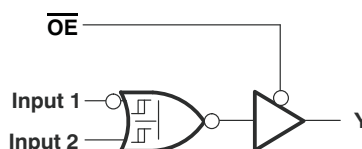
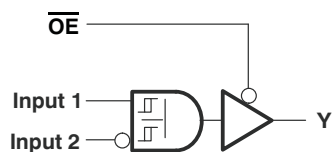


| NO. OF INPUTS | AND/NAND FUNCTION | OR/NOR FUNCTION | $\overline{OE}$ | A       | B       | C       | D |
|---------------|-------------------|-----------------|-----------------|---------|---------|---------|---|
| 2             | 3-state AND       | 3-state NOR     | L               | Input 1 | L       | Input 2 | L |
| 2             | 3-state AND       | 3-state NOR     |                 | H       | Input 2 | Input 1 | H |

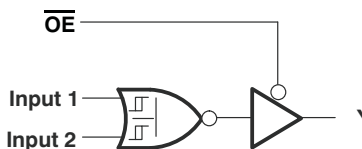
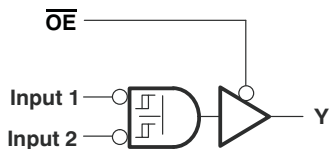


| NO. OF INPUTS | AND/NAND FUNCTION                 | OR/NOR FUNCTION | $\overline{OE}$ | A       | B | C       | D |
|---------------|-----------------------------------|-----------------|-----------------|---------|---|---------|---|
| 2             | 3-state AND, both inverted inputs | 3-state NOR     | L               | Input 1 | H | Input 2 | H |
| 2             | 3-state AND, both inverted inputs | 3-state NOR     |                 | Input 2 | H | Input 1 | H |



**3-State NAND/OR Functions Available**

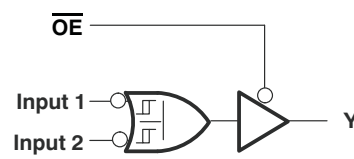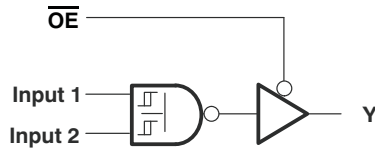



| NO. OF INPUTS | AND/NAND FUNCTION | OR/NOR FUNCTION | $\overline{OE}$ | A | B       | C       | D |
|---------------|-------------------|-----------------|-----------------|---|---------|---------|---|
| 2             | 3-state NAND      | 3-state OR      | L               | L | Input 1 | Input 2 | H |
| 2             | 3-state NAND      | 3-state OR      |                 | L | Input 2 | Input 1 | H |

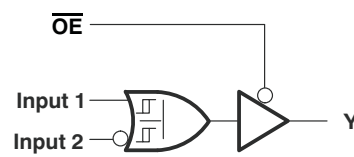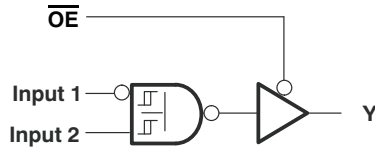

| NO. OF INPUTS | AND/NAND FUNCTION | OR/NOR FUNCTION | $\overline{OE}$ | A       | B       | C       | D |
|---------------|-------------------|-----------------|-----------------|---------|---------|---------|---|
| 2             | 3-state NAND      | 3-state OR      | L               | Input 2 | L       | Input 1 | H |
| 2             | 3-state NAND      | 3-state OR      |                 | H       | Input 1 | Input 2 | L |

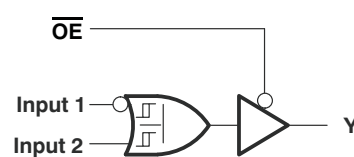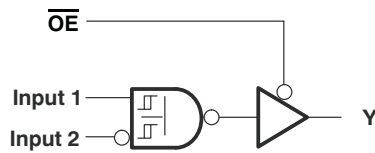


| NO. OF INPUTS | AND/NAND FUNCTION | OR/NOR FUNCTION | $\overline{OE}$ | A       | B       | C       | D |
|---------------|-------------------|-----------------|-----------------|---------|---------|---------|---|
| 2             | 3-state NAND      | 3-state OR      | L               | Input 1 | L       | Input 2 | H |
| 2             | 3-state NAND      | 3-state OR      |                 | H       | Input 2 | Input 1 | L |

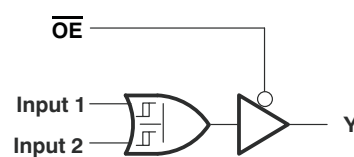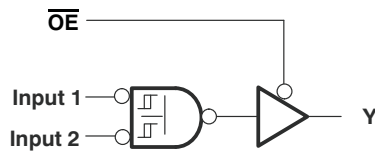


| NO. OF INPUTS | AND/NAND FUNCTION | OR/NOR FUNCTION | $\overline{OE}$ | A       | B | C       | D |
|---------------|-------------------|-----------------|-----------------|---------|---|---------|---|
| 2             | 3-state NAND      | 3-state OR      | L               | Input 1 | H | Input 2 | L |
| 2             | 3-state NAND      | 3-state OR      |                 | Input 2 | H | Input 1 | L |


3-State XOR/XNOR Functions Available

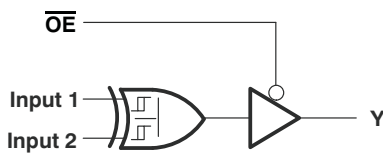


| FUNCTION    | $\overline{OE}$ | A       | B       | C       | D       |
|-------------|-----------------|---------|---------|---------|---------|
| 3-state XOR | L               | Input 1 | H or L  | L       | Input 2 |
|             |                 | Input 2 | H or L  | L       | Input 1 |
|             |                 | H or L  | Input 1 | H       | Input 2 |
|             |                 | H or L  | Input 2 | H       | Input 1 |
|             |                 | L       | H       | Input 1 | Input 2 |
| L           | H               | Input 2 | Input 1 |         |         |

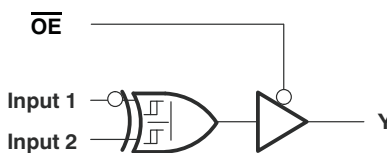

| FUNCTION    | $\overline{OE}$ | A | B | C       | D       |
|-------------|-----------------|---|---|---------|---------|
| 3-state XOR | L               | H | L | Input 1 | Input 2 |

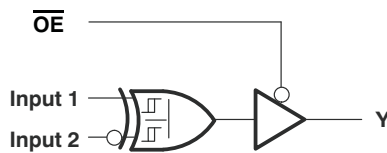

| FUNCTION    | $\overline{OE}$ | A | B | C       | D       |
|-------------|-----------------|---|---|---------|---------|
| 3-state XOR | L               | H | L | Input 1 | Input 2 |

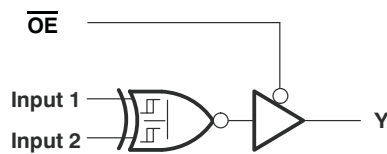

| FUNCTION     | $\overline{OE}$ | A | B | C       | D       |
|--------------|-----------------|---|---|---------|---------|
| 3-state XNOR | L               | H | L | Input 1 | Input 2 |
| 3-state XNOR |                 | H | L | Input 2 | Input 1 |

## Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

|                  |   | MIN                | MAX                   | UNIT |
|------------------|---|--------------------|-----------------------|------|
| V <sub>CC</sub>  | Supply voltage range  | -0.5               | 6.5                   | V    |
| V <sub>I</sub>   | Input voltage range <sup>(2)</sup>  | -0.5               | 6.5                   | V    |
| V <sub>O</sub>   | Voltage range applied to any output in the high-impedance or power-off state <sup>(2)</sup> | -0.5               | 6.5                   | V    |
| V <sub>O</sub>   | Voltage range applied to any output in the high or low state <sup>(2)(3)</sup>              | -0.5               | V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>  | Input clamp current   | V <sub>I</sub> < 0 | -50                   | mA   |
| I <sub>OK</sub>  | Output clamp current  | V <sub>O</sub> < 0 | -50                   | mA   |
| I <sub>O</sub>   | Continuous output current   |                    | ±50                   | mA   |
|                  | Continuous current through V <sub>CC</sub> or GND   |                    | ±100                  | mA   |
| θ <sub>JA</sub>  | Package thermal impedance <sup>(4)</sup>  | DCT package        | 220                   | °C/W |
|                  |   | DCU package        | 227                   |      |
|                  |   | YZP package        | 102                   |      |
| T <sub>stg</sub> | Storage temperature range   | -65                | 150                   | °C   |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V<sub>CC</sub> is provided in the recommended operating conditions table.
- (4) The package thermal impedance is calculated in accordance with JESD 51-7.

## Recommended Operating Conditions<sup>(1)</sup>

|                 |                                    | MIN   | MAX             | UNIT |      |
|-----------------|------------------------------------|---|-----------------|------|------|
| V <sub>CC</sub> | Supply voltage                     | Operating                                       | 1.65            | 5.5  | V    |
|                 |                                    | Data retention only                             | 1.5             |      |      |
| V <sub>I</sub>  | Input voltage                      | 0   | 5.5             | V    |      |
| V <sub>O</sub>  | Output voltage                     | 0   | V <sub>CC</sub> | V    |      |
| I <sub>OH</sub> | High-level output current          | V <sub>CC</sub> = 1.65 V                        |                 | -4   | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3 V                         |                 | -8   |      |
|                 |                                    | V <sub>CC</sub> = 3 V                           |                 | -16  |      |
|                 |                                    | V <sub>CC</sub> = 4.5 V                         |                 | -24  |      |
| I <sub>OL</sub> | Low-level output current           | V <sub>CC</sub> = 1.65 V                        |                 | 4    | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3 V                         |                 | 8    |      |
|                 |                                    | V <sub>CC</sub> = 3 V                           |                 | 16   |      |
|                 |                                    | V <sub>CC</sub> = 4.5 V                         |                 | 24   |      |
| Δt/Δv           | Input transition rise or fall rate | V <sub>CC</sub> = 1.8 V ± 0.15 V, 2.5 V ± 0.2 V |                 | 20   | ns/V |
|                 |                                    | V <sub>CC</sub> = 3.3 V ± 0.3 V                 |                 | 10   |      |
|                 |                                    | V <sub>CC</sub> = 5 V ± 0.5 V                   |                 | 5    |      |

- (1) All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number [SCBA004](#).

## Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER   | TEST CONDITIONS  | V <sub>CC</sub> | –40°C to 85°C         |                    |                       | –40°C to 125°C |                    |      | UNIT |
|---|--|-----------------|-----------------------|--------------------|-----------------------|----------------|--------------------|------|------|
|   |  |                 | MIN                   | TYP <sup>(1)</sup> | MAX                   | MIN            | TYP <sup>(1)</sup> | MAX  |      |
| V <sub>T+</sub> Positive-going input threshold voltage          |  | 1.65 V          | 0.79                  |                    | 1.26                  | 0.79           |                    | 1.26 | V    |
|   |  | 2.3 V           | 1.11                  |                    | 1.66                  | 1.11           |                    | 1.66 |      |
|   |  | 3 V             | 1.5                   |                    | 1.97                  | 1.5            |                    | 1.97 |      |
|   |  | 4.5 V           | 2.16                  |                    | 2.84                  | 2.16           |                    | 2.84 |      |
|   |  | 5.5 V           | 2.61                  |                    | 3.43                  | 2.61           |                    | 3.43 |      |
| V <sub>T–</sub> Negative-going input threshold voltage          |  | 1.65 V          | 0.39                  |                    | 0.72                  | 0.39           |                    | 0.72 | V    |
|   |  | 2.3 V           | 0.58                  |                    | 0.97                  | 0.58           |                    | 0.97 |      |
|   |  | 3 V             | 0.84                  |                    | 1.24                  | 0.84           |                    | 1.24 |      |
|   |  | 4.5 V           | 1.41                  |                    | 1.89                  | 1.41           |                    | 1.89 |      |
|   |  | 5.5 V           | 1.87                  |                    | 2.39                  | 1.87           |                    | 2.39 |      |
| ΔV <sub>T</sub> Hysteresis (V <sub>T+</sub> – V <sub>T–</sub> ) |  | 1.65 V          | 0.37                  |                    | 0.72                  | 0.37           |                    | 0.72 | V    |
|   |  | 2.3 V           | 0.48                  |                    | 0.87                  | 0.48           |                    | 0.87 |      |
|   |  | 3 V             | 0.56                  |                    | 0.97                  | 0.56           |                    | 0.97 |      |
|   |  | 4.5 V           | 0.71                  |                    | 1.14                  | 0.71           |                    | 1.14 |      |
|   |  | 5.5 V           | 0.71                  |                    | 1.21                  | 0.71           |                    | 1.21 |      |
| V <sub>OH</sub>   | I <sub>OH</sub> = –100 μA  | 1.65 V to 5.5 V | V <sub>CC</sub> – 0.1 |                    | V <sub>CC</sub> – 0.1 |                |                    |      | V    |
|   | I <sub>OH</sub> = –4 mA  | 1.65 V          | 1.2                   |                    | 1.2                   |                |                    |      |      |
|   | I <sub>OH</sub> = –8 mA  | 2.3 V           | 1.9                   |                    | 1.9                   |                |                    |      |      |
|   | I <sub>OH</sub> = –16 mA   | 3 V             | 2.4                   |                    | 2.4                   |                |                    |      |      |
|   | I <sub>OH</sub> = –24 mA   |                 | 2.3                   |                    | 2.3                   |                |                    |      |      |
|   | I <sub>OH</sub> = –32 mA   | 4.5 V           | 3.8                   |                    | 3.8                   |                |                    |      |      |
| V <sub>OL</sub>   | I <sub>OL</sub> = 100 μA   | 1.65 V to 5.5 V |                       | 0.1                |                       | 0.1            |                    | V    |      |
|   | I <sub>OL</sub> = 4 mA   | 1.65 V          |                       | 0.45               |                       | 0.45           |                    |      |      |
|   | I <sub>OL</sub> = 8 mA   | 2.3 V           |                       | 0.3                |                       | 0.3            |                    |      |      |
|   | I <sub>OL</sub> = 16 mA  | 3 V             |                       | 0.4                |                       | 0.4            |                    |      |      |
|   | I <sub>OL</sub> = 24 mA  |                 |                       | 0.55               |                       | 0.55           |                    |      |      |
|   | I <sub>OL</sub> = 32 mA  | 4.5 V           |                       | 0.55               |                       | 0.55           |                    |      |      |
| I <sub>I</sub>  | V <sub>I</sub> = 5.5 V or GND  | 0 V to 5.5 V    |                       | ±5                 |                       | ±5             | μA                 |      |      |
| I <sub>off</sub>  | V <sub>I</sub> or V <sub>O</sub> = 5.5 V                                     | 0 V             |                       | ±10                |                       | ±10            | μA                 |      |      |
| I <sub>OZ</sub>   | V <sub>O</sub> = V <sub>CC</sub> or GND                                      | 1.65 V to 5.5 V |                       | ±10                |                       | ±10            | μA                 |      |      |
| I <sub>CC</sub>   | V <sub>I</sub> = 5.5 V or GND, I <sub>O</sub> = 0                            | 1.65 V to 5.5 V |                       | 10                 |                       | 10             | μA                 |      |      |
| ΔI <sub>CC</sub>  | One input at V <sub>CC</sub> – 0.6 V, Other inputs at V <sub>CC</sub> or GND | 3 V to 5.5 V    |                       | 500                |                       | 500            | μA                 |      |      |
| C <sub>i</sub>  | V <sub>I</sub> = V <sub>CC</sub> or GND                                      | 3.3 V           |                       | 3.5                |                       | 3.5            | pF                 |      |      |
| C <sub>o</sub>  | V <sub>O</sub> = V <sub>CC</sub> or GND                                      | 3.3 V           |                       | 6                  |                       | 6              | pF                 |      |      |

 (1) T<sub>A</sub> = 25°C

## Switching Characteristics

over recommended operating free-air temperature range,  $C_L = 15$  pF (unless otherwise noted) (see Figure 1)

| PARAMETER | FROM (INPUT)    | TO (OUTPUT) | SN74LVC1G99<br>–40°C to 85°C     |      |                                 |      |                                 |     |                               |     | UNIT |
|-----------|-----------------|-------------|----------------------------------|------|---------------------------------|------|---------------------------------|-----|-------------------------------|-----|------|
|           |                 |             | $V_{CC} = 1.8$ V<br>$\pm 0.15$ V |      | $V_{CC} = 2.5$ V<br>$\pm 0.2$ V |      | $V_{CC} = 3.3$ V<br>$\pm 0.3$ V |     | $V_{CC} = 5$ V<br>$\pm 0.5$ V |     |      |
|           |                 |             | MIN                              | MAX  | MIN                             | MAX  | MIN                             | MAX | MIN                           | MAX |      |
| $t_{pd}$  | A               | Y           | 4.5                              | 30.1 | 2.5                             | 11.3 | 1.8                             | 7.5 | 1.3                           | 4.8 | ns   |
|           | B               |             | 4.4                              | 28.3 | 2.4                             | 10.8 | 1.8                             | 7.2 | 1.3                           | 4.7 |      |
|           | C               |             | 4.4                              | 29.1 | 2.4                             | 11.7 | 1.9                             | 7.6 | 1.3                           | 5   |      |
|           | D               |             | 4.3                              | 25.1 | 2.4                             | 10.2 | 1.7                             | 6.7 | 1.3                           | 4.5 |      |
| $t_{en}$  | $\overline{OE}$ | Y           | 3.4                              | 24.7 | 2.1                             | 10   | 1.3                             | 5.8 | 1                             | 3.8 | ns   |
| $t_{dis}$ | $\overline{OE}$ | Y           | 4                                | 15.5 | 2.7                             | 7.5  | 3.5                             | 7   | 2                             | 5.5 | ns   |

## Switching Characteristics

over recommended operating free-air temperature range,  $C_L = 30$  pF or 50 pF (unless otherwise noted) (see Figure 2)

| PARAMETER | FROM (INPUT)    | TO (OUTPUT) | SN74LVC1G99<br>–40°C to 85°C     |      |                                 |      |                                 |     |                               |     | UNIT |
|-----------|-----------------|-------------|----------------------------------|------|---------------------------------|------|---------------------------------|-----|-------------------------------|-----|------|
|           |                 |             | $V_{CC} = 1.8$ V<br>$\pm 0.15$ V |      | $V_{CC} = 2.5$ V<br>$\pm 0.2$ V |      | $V_{CC} = 3.3$ V<br>$\pm 0.3$ V |     | $V_{CC} = 5$ V<br>$\pm 0.5$ V |     |      |
|           |                 |             | MIN                              | MAX  | MIN                             | MAX  | MIN                             | MAX | MIN                           | MAX |      |
| $t_{pd}$  | A               | Y           | 4.6                              | 30.8 | 2.6                             | 11.7 | 2.4                             | 8.4 | 1.8                           | 5.5 | ns   |
|           | B               |             | 4.6                              | 28.9 | 2.6                             | 11.3 | 2.3                             | 8.2 | 1.8                           | 5.4 |      |
|           | C               |             | 4.4                              | 29.8 | 2.5                             | 12.3 | 2.5                             | 8.6 | 1.8                           | 5.7 |      |
|           | D               |             | 4.3                              | 25.7 | 2.5                             | 10.7 | 2.4                             | 7.6 | 1.6                           | 5.2 |      |
| $t_{en}$  | $\overline{OE}$ | Y           | 4.2                              | 25.2 | 2.4                             | 11.3 | 2                               | 7   | 1.7                           | 4.7 | ns   |
| $t_{dis}$ | $\overline{OE}$ | Y           | 3.7                              | 15   | 2                               | 5.8  | 2.1                             | 5.6 | 1                             | 4.5 | ns   |

## Switching Characteristics

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 2)


| PARAMETER | FROM (INPUT)    | TO (OUTPUT) | SN74LVC1G99<br>–40°C to 125°C    |      |                                 |      |                                 |      |                               |     | UNIT |
|-----------|-----------------|-------------|----------------------------------|------|---------------------------------|------|---------------------------------|------|-------------------------------|-----|------|
|           |                 |             | $V_{CC} = 1.8$ V<br>$\pm 0.15$ V |      | $V_{CC} = 2.5$ V<br>$\pm 0.2$ V |      | $V_{CC} = 3.3$ V<br>$\pm 0.3$ V |      | $V_{CC} = 5$ V<br>$\pm 0.5$ V |     |      |
|           |                 |             | MIN                              | MAX  | MIN                             | MAX  | MIN                             | MAX  | MIN                           | MAX |      |
| $t_{pd}$  | A               | Y           | 4.6                              | 32.8 | 2.6                             | 13.7 | 2.4                             | 10.4 | 1.8                           | 6.9 | ns   |
|           | B               |             | 4.6                              | 30.9 | 2.6                             | 13.3 | 2.3                             | 10.2 | 1.8                           | 6.8 |      |
|           | C               |             | 4.4                              | 31.8 | 2.4                             | 14.3 | 2.5                             | 10.6 | 1.8                           | 7.2 |      |
|           | D               |             | 4.3                              | 27.7 | 2.5                             | 12.7 | 2.4                             | 9.5  | 1.6                           | 6.5 |      |
| $t_{en}$  | $\overline{OE}$ | Y           | 4.2                              | 27.2 | 2.4                             | 13.3 | 2.0                             | 9.0  | 1.7                           | 6.0 | ns   |
| $t_{dis}$ | $\overline{OE}$ | Y           | 3.7                              | 17.0 | 2.0                             | 7.3  | 2.1                             | 7.4  | 1.0                           | 5.6 | ns   |

## Operating Characteristics

$T_A = 25^\circ\text{C}$

| PARAMETER                              | TEST CONDITIONS | $V_{CC} = 1.8$ V | $V_{CC} = 2.5$ V | $V_{CC} = 3.3$ V | $V_{CC} = 5$ V | UNIT |
|--|-----------------|------------------|------------------|------------------|----------------|------|
|  |                 | TYP              | TYP              | TYP              | TYP            |      |
| $C_{pd}$ Power dissipation capacitance | $f = 10$ MHz    | 19               | 20               | 22               | 27             | pF   |





Parameter Measurement Information

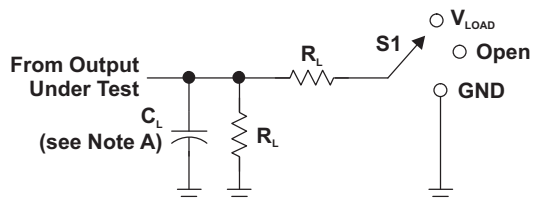

LOAD CIRCUIT

| TEST              | S1         |
|-------------------|------------|
| $t_{PLH}/t_{PHL}$ | Open       |
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |


| $V_{CC}$                         | INPUTS   |                      | $V_M$      | $V_{LOAD}$        | $C_L$ | $R_L$        | $V_{\Delta}$ |
|----------------------------------|----------|----------------------|------------|-------------------|-------|--------------|--------------|
|                                  | $V_I$    | $t/t_i$              |            |                   |       |              |              |
| $1.8\text{ V} \pm 0.15\text{ V}$ | $V_{CC}$ | $\leq 2\text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 15 pF | 1 M $\Omega$ | 0.15 V       |
| $2.5\text{ V} \pm 0.2\text{ V}$  | $V_{CC}$ | $\leq 2\text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 15 pF | 1 M $\Omega$ | 0.15 V       |
| $3.3\text{ V} \pm 0.3\text{ V}$  | 3 V      | $\leq 2.5\text{ ns}$ | 1.5 V      | 6 V               | 15 pF | 1 M $\Omega$ | 0.3 V        |
| $5\text{ V} \pm 0.5\text{ V}$    | $V_{CC}$ | $\leq 2.5\text{ ns}$ | $V_{CC}/2$ | $2 \times V_{CC}$ | 15 pF | 1 M $\Omega$ | 0.3 V        |

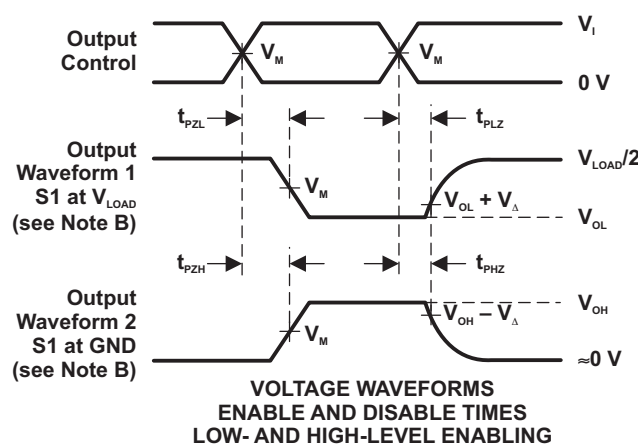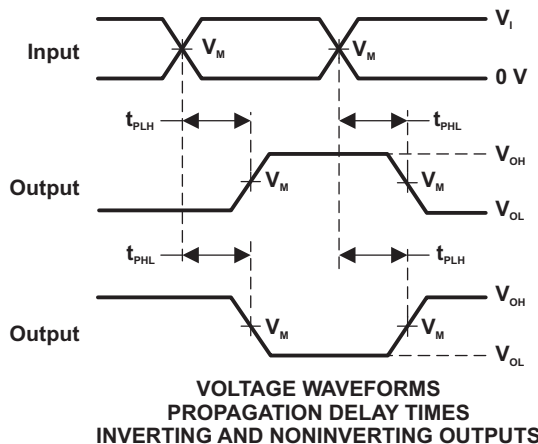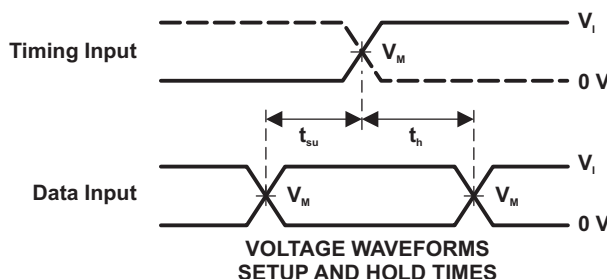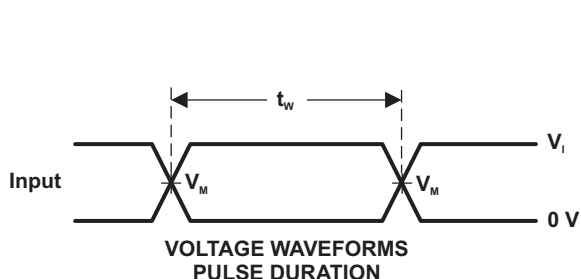

- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.  
 C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_o = 50\ \Omega$ .  
 D. The outputs are measured one at a time, with one transition per measurement.  
 E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .  
 F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .  
 G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .  
 H. All parameters and waveforms are not applicable to all devices.





Figure 1. Load Circuit and Voltage Waveforms

Parameter Measurement Information (continued)

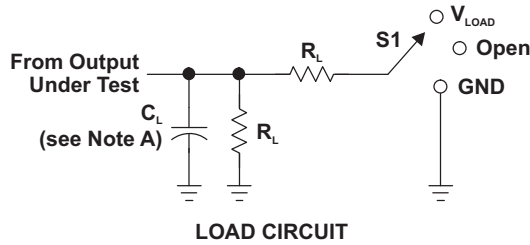

| TEST              | S1         |
|-------------------|------------|
| $t_{PLH}/t_{PHL}$ | Open       |
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |

| $V_{CC}$                         | INPUTS   |                      | $V_M$      | $V_{LOAD}$        | $C_L$ | $R_L$        | $V_{\Delta}$ |
|----------------------------------|----------|----------------------|------------|-------------------|-------|--------------|--------------|
|                                  | $V_I$    | $t_r/t_f$            |            |                   |       |              |              |
| $1.8\text{ V} \pm 0.15\text{ V}$ | $V_{CC}$ | $\leq 2\text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 1 k $\Omega$ | 0.15 V       |
| $2.5\text{ V} \pm 0.2\text{ V}$  | $V_{CC}$ | $\leq 2\text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 500 $\Omega$ | 0.15 V       |
| $3.3\text{ V} \pm 0.3\text{ V}$  | 3 V      | $\leq 2.5\text{ ns}$ | 1.5 V      | 6 V               | 50 pF | 500 $\Omega$ | 0.3 V        |
| $5\text{ V} \pm 0.5\text{ V}$    | $V_{CC}$ | $\leq 2.5\text{ ns}$ | $V_{CC}/2$ | $2 \times V_{CC}$ | 50 pF | 500 $\Omega$ | 0.3 V        |

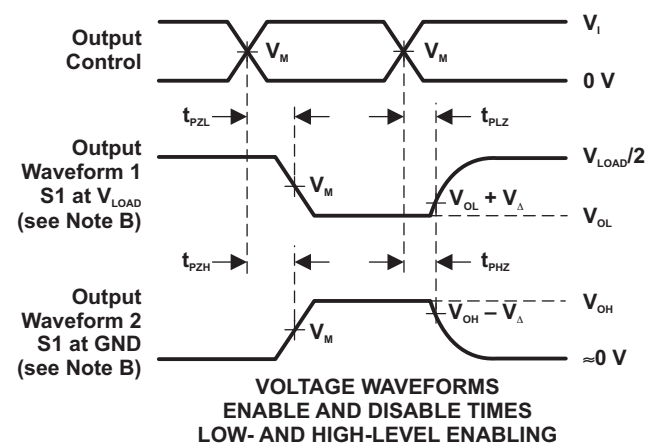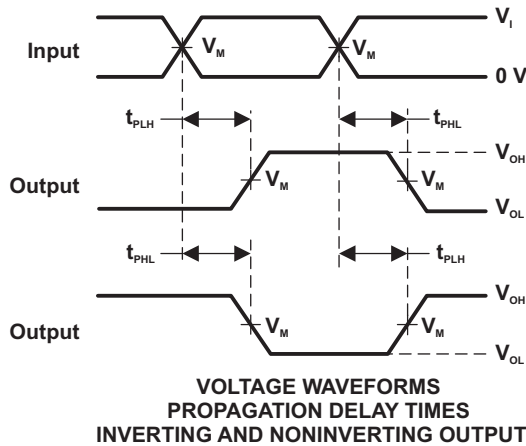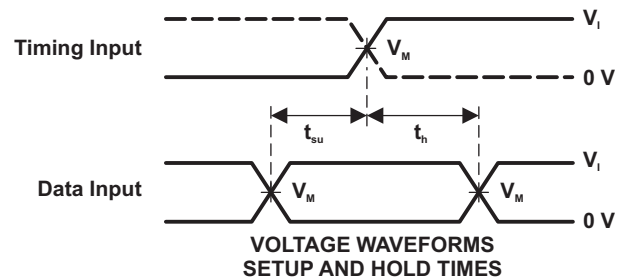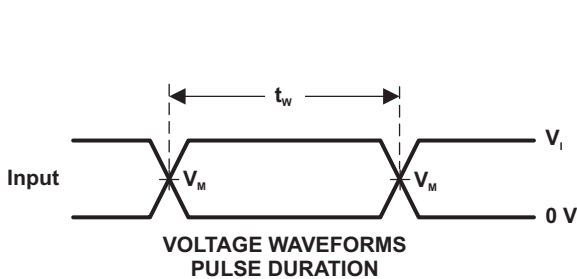

- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.  
 C. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10\text{ MHz}$ ,  $Z_o = 50\ \Omega$ .  
 D. The outputs are measured one at a time, with one transition per measurement.  
 E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .  
 F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{on}$ .  
 G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .  
 H. All parameters and waveforms are not applicable to all devices.

Figure 2. Load Circuit and Voltage Waveforms

## REVISION HISTORY

---

**Changes from Revision E (October 2007) to Revision F** **Page**

- Changed document template from TIMS format to DocZone format. .... 1
  - Changed 3-State Mux graphic to fix labeling error. .... 4
- 

**Changes from Revision F (April 2011) to Revision G** **Page**

- Updated document to new TI data sheet format. .... 1
  - Updated Features. .... 1
  - Added ESD warning. .... 2
  - Updated operating temperature range. .... 8
-

**PACKAGING INFORMATION**

| Orderable part number             | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)   |
|-----------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|-----------------------|
| <a href="#">SN74LVC1G99DCTR</a>   | Active        | Production           | SSOP (DCT)   8  | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | (2WF5, C99)<br>(R, Z) |
| SN74LVC1G99DCTR.B                 | Active        | Production           | SSOP (DCT)   8  | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | (2WF5, C99)<br>(R, Z) |
| <a href="#">SN74LVC1G99DCTRG4</a> | Active        | Production           | SSOP (DCT)   8  | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | C99<br>(R, Z)         |
| SN74LVC1G99DCTRG4.B               | Active        | Production           | SSOP (DCT)   8  | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | C99<br>(R, Z)         |
| <a href="#">SN74LVC1G99DCTT</a>   | Active        | Production           | SSOP (DCT)   8  | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | (2WF5, C99)<br>(R, Z) |
| SN74LVC1G99DCTT.B                 | Active        | Production           | SSOP (DCT)   8  | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | (2WF5, C99)<br>(R, Z) |
| <a href="#">SN74LVC1G99DCUR</a>   | Active        | Production           | VSSOP (DCU)   8 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | (C99J, C99Q, C99R)    |
| SN74LVC1G99DCUR.B                 | Active        | Production           | VSSOP (DCU)   8 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | (C99J, C99Q, C99R)    |
| <a href="#">SN74LVC1G99DCURG4</a> | Active        | Production           | VSSOP (DCU)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | C99R                  |
| SN74LVC1G99DCURG4.B               | Active        | Production           | VSSOP (DCU)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | C99R                  |
| <a href="#">SN74LVC1G99DCUT</a>   | Active        | Production           | VSSOP (DCU)   8 | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | (C99J, C99Q, C99R)    |
| SN74LVC1G99DCUT.B                 | Active        | Production           | VSSOP (DCU)   8 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | (C99J, C99Q, C99R)    |
| <a href="#">SN74LVC1G99YZPR</a>   | Active        | Production           | DSBGA (YZP)   8 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | DEN                   |
| SN74LVC1G99YZPR.B                 | Active        | Production           | DSBGA (YZP)   8 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | DEN                   |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN74LVC1G99 :**

- Automotive : [SN74LVC1G99-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**




\*All dimensions are nominal

| Device            | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LVC1G99DCTR   | SSOP         | DCT             | 8    | 3000 | 180.0              | 12.4               | 3.15    | 4.35    | 1.55    | 4.0     | 12.0   | Q3            |
| SN74LVC1G99DCTRG4 | SSOP         | DCT             | 8    | 3000 | 177.8              | 12.4               | 3.45    | 4.4     | 1.45    | 4.0     | 12.0   | Q3            |
| SN74LVC1G99DCTRG4 | SSOP         | DCT             | 8    | 3000 | 180.0              | 13.0               | 3.35    | 4.5     | 1.55    | 4.0     | 12.0   | Q3            |
| SN74LVC1G99DCTT   | SSOP         | DCT             | 8    | 250  | 180.0              | 12.4               | 3.15    | 4.35    | 1.55    | 4.0     | 12.0   | Q3            |
| SN74LVC1G99DCUR   | VSSOP        | DCU             | 8    | 3000 | 178.0              | 9.0                | 2.25    | 3.35    | 1.05    | 4.0     | 8.0    | Q3            |
| SN74LVC1G99DCURG4 | VSSOP        | DCU             | 8    | 3000 | 180.0              | 8.4                | 2.25    | 3.35    | 1.05    | 4.0     | 8.0    | Q3            |
| SN74LVC1G99DCUT   | VSSOP        | DCU             | 8    | 250  | 178.0              | 9.5                | 2.25    | 3.35    | 1.05    | 4.0     | 8.0    | Q3            |
| SN74LVC1G99DCUT   | VSSOP        | DCU             | 8    | 250  | 178.0              | 9.0                | 2.25    | 3.35    | 1.05    | 4.0     | 8.0    | Q3            |
| SN74LVC1G99YZPR   | DSBGA        | YZP             | 8    | 3000 | 178.0              | 9.2                | 1.02    | 2.02    | 0.63    | 4.0     | 8.0    | Q1            |

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device            | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LVC1G99DCTR   | SSOP         | DCT             | 8    | 3000 | 190.0       | 190.0      | 30.0        |
| SN74LVC1G99DCTRG4 | SSOP         | DCT             | 8    | 3000 | 183.0       | 183.0      | 20.0        |
| SN74LVC1G99DCTRG4 | SSOP         | DCT             | 8    | 3000 | 182.0       | 182.0      | 20.0        |
| SN74LVC1G99DCTT   | SSOP         | DCT             | 8    | 250  | 190.0       | 190.0      | 30.0        |
| SN74LVC1G99DCUR   | VSSOP        | DCU             | 8    | 3000 | 180.0       | 180.0      | 18.0        |
| SN74LVC1G99DCURG4 | VSSOP        | DCU             | 8    | 3000 | 183.0       | 183.0      | 20.0        |
| SN74LVC1G99DCUT   | VSSOP        | DCU             | 8    | 250  | 202.0       | 201.0      | 28.0        |
| SN74LVC1G99DCUT   | VSSOP        | DCU             | 8    | 250  | 180.0       | 180.0      | 18.0        |
| SN74LVC1G99YZPR   | DSBGA        | YZP             | 8    | 3000 | 220.0       | 220.0      | 35.0        |

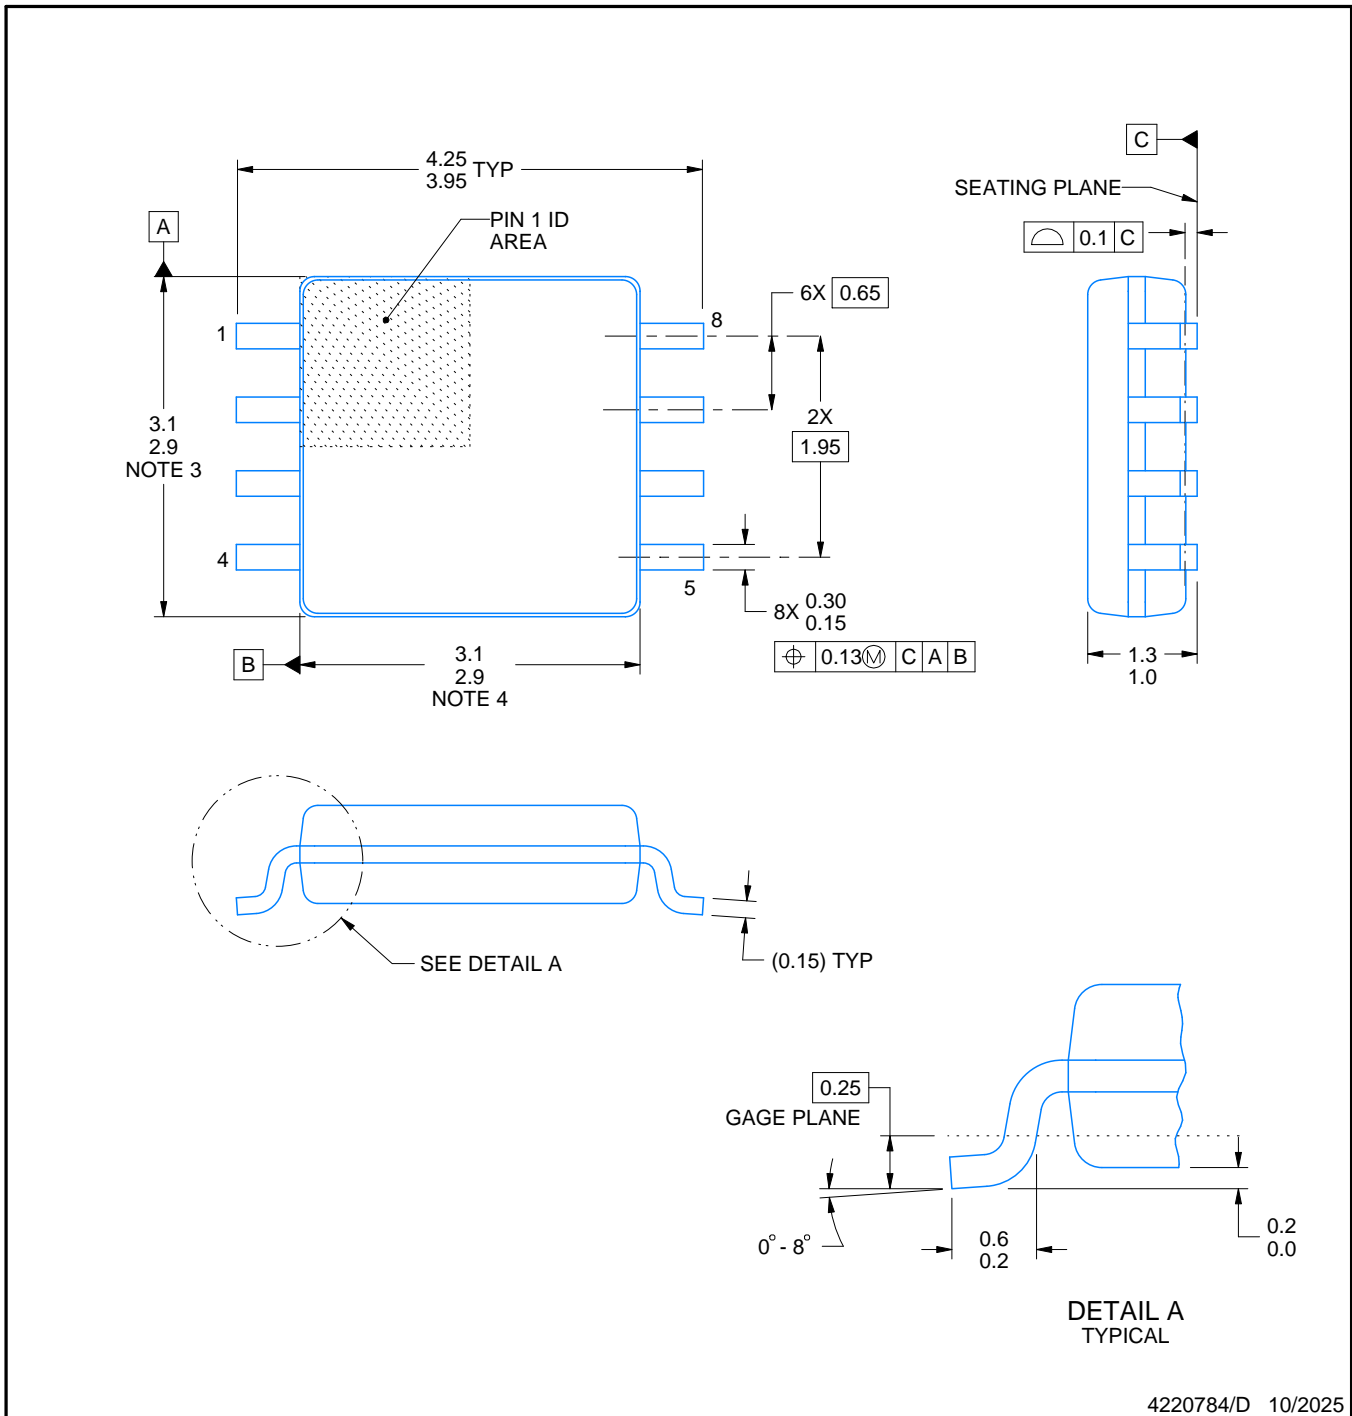

4220784/D 10/2025

NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.

# EXAMPLE BOARD LAYOUT


DCT0008A

SSOP - 1.3 mm max height

SMALL OUTLINE PACKAGE

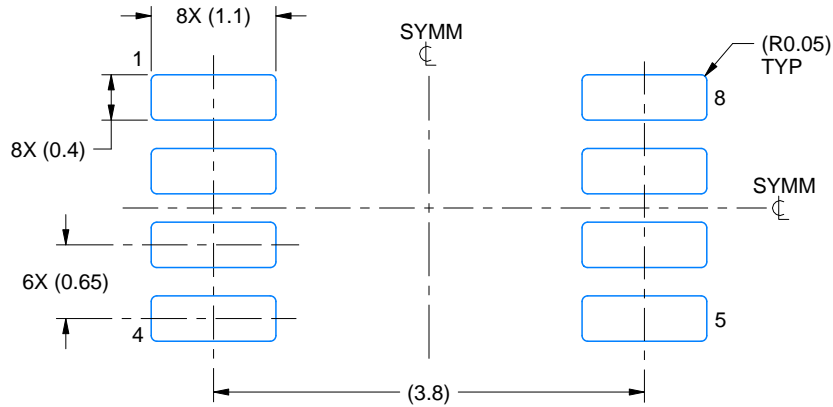

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

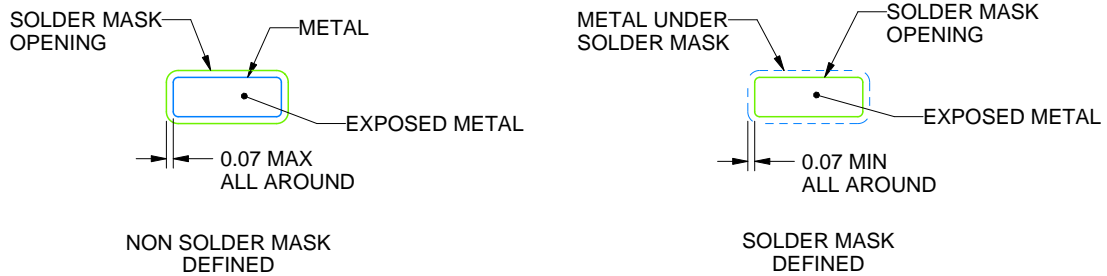

SOLDER MASK DETAILS

4220784/D 10/2025

NOTES: (continued)


- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DCT0008A

SSOP - 1.3 mm max height

SMALL OUTLINE PACKAGE

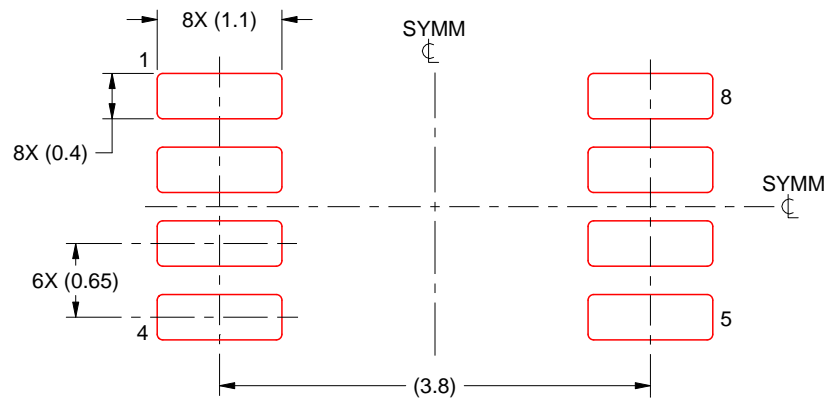

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4220784/D 10/2025

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.




# EXAMPLE BOARD LAYOUT


DCU0008A

VSSOP - 0.9 mm max height

SMALL OUTLINE PACKAGE

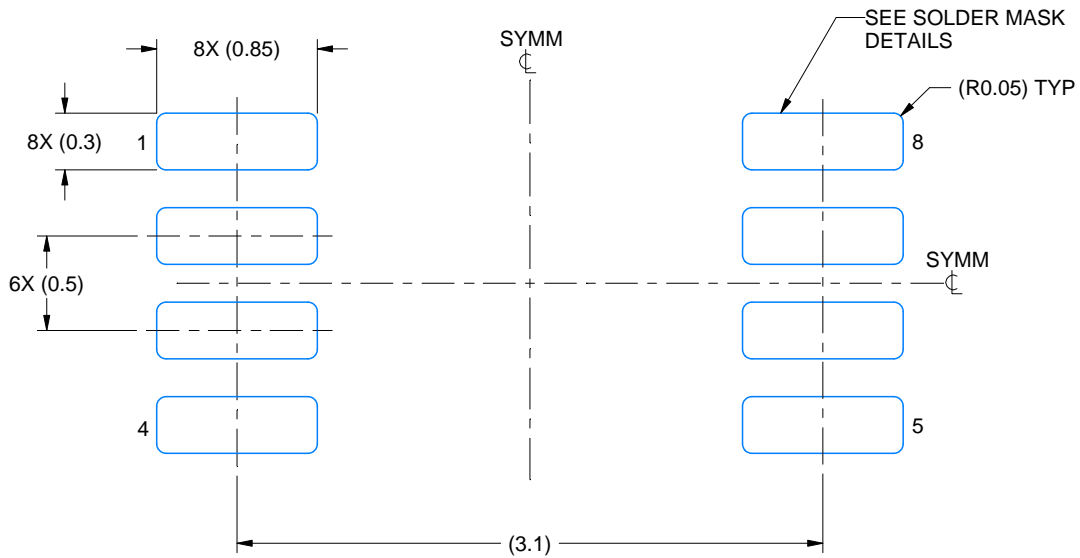

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 25X

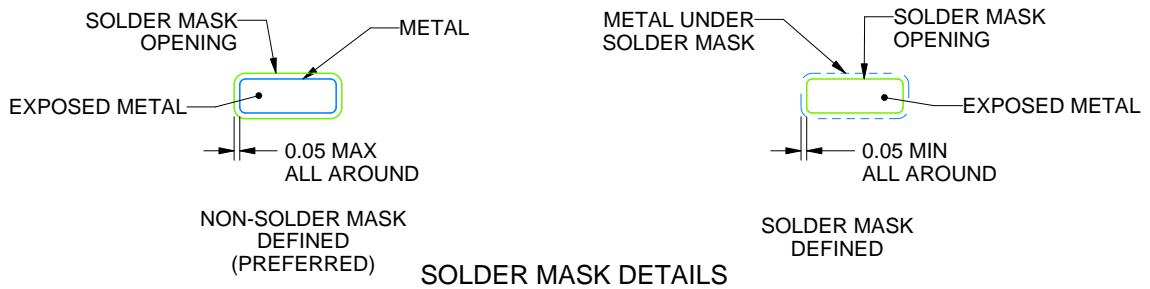

4225266/A 09/2014

NOTES: (continued)


5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DCU0008A

VSSOP - 0.9 mm max height

SMALL OUTLINE PACKAGE

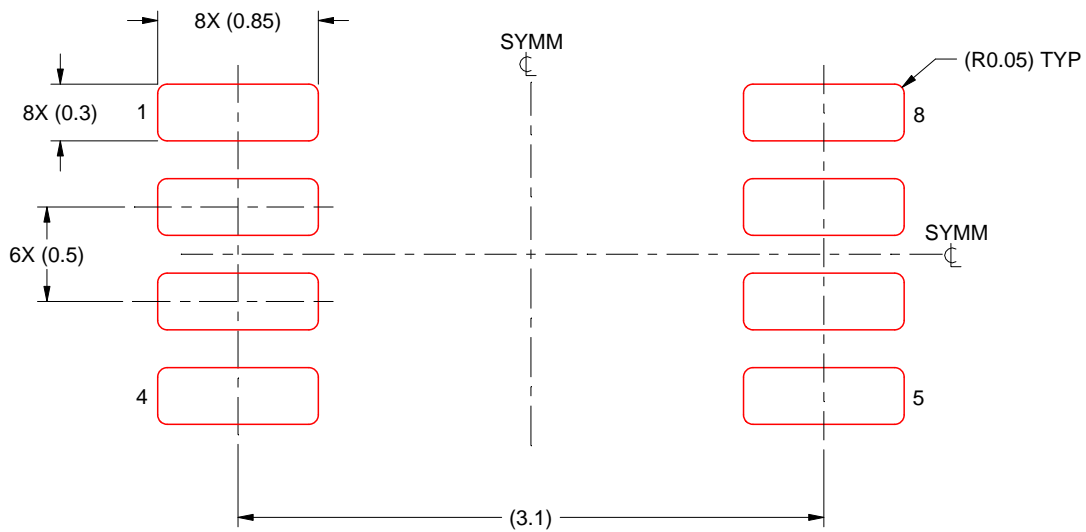


SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 25X

4225266/A 09/2014

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.


YZP0008



# PACKAGE OUTLINE

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

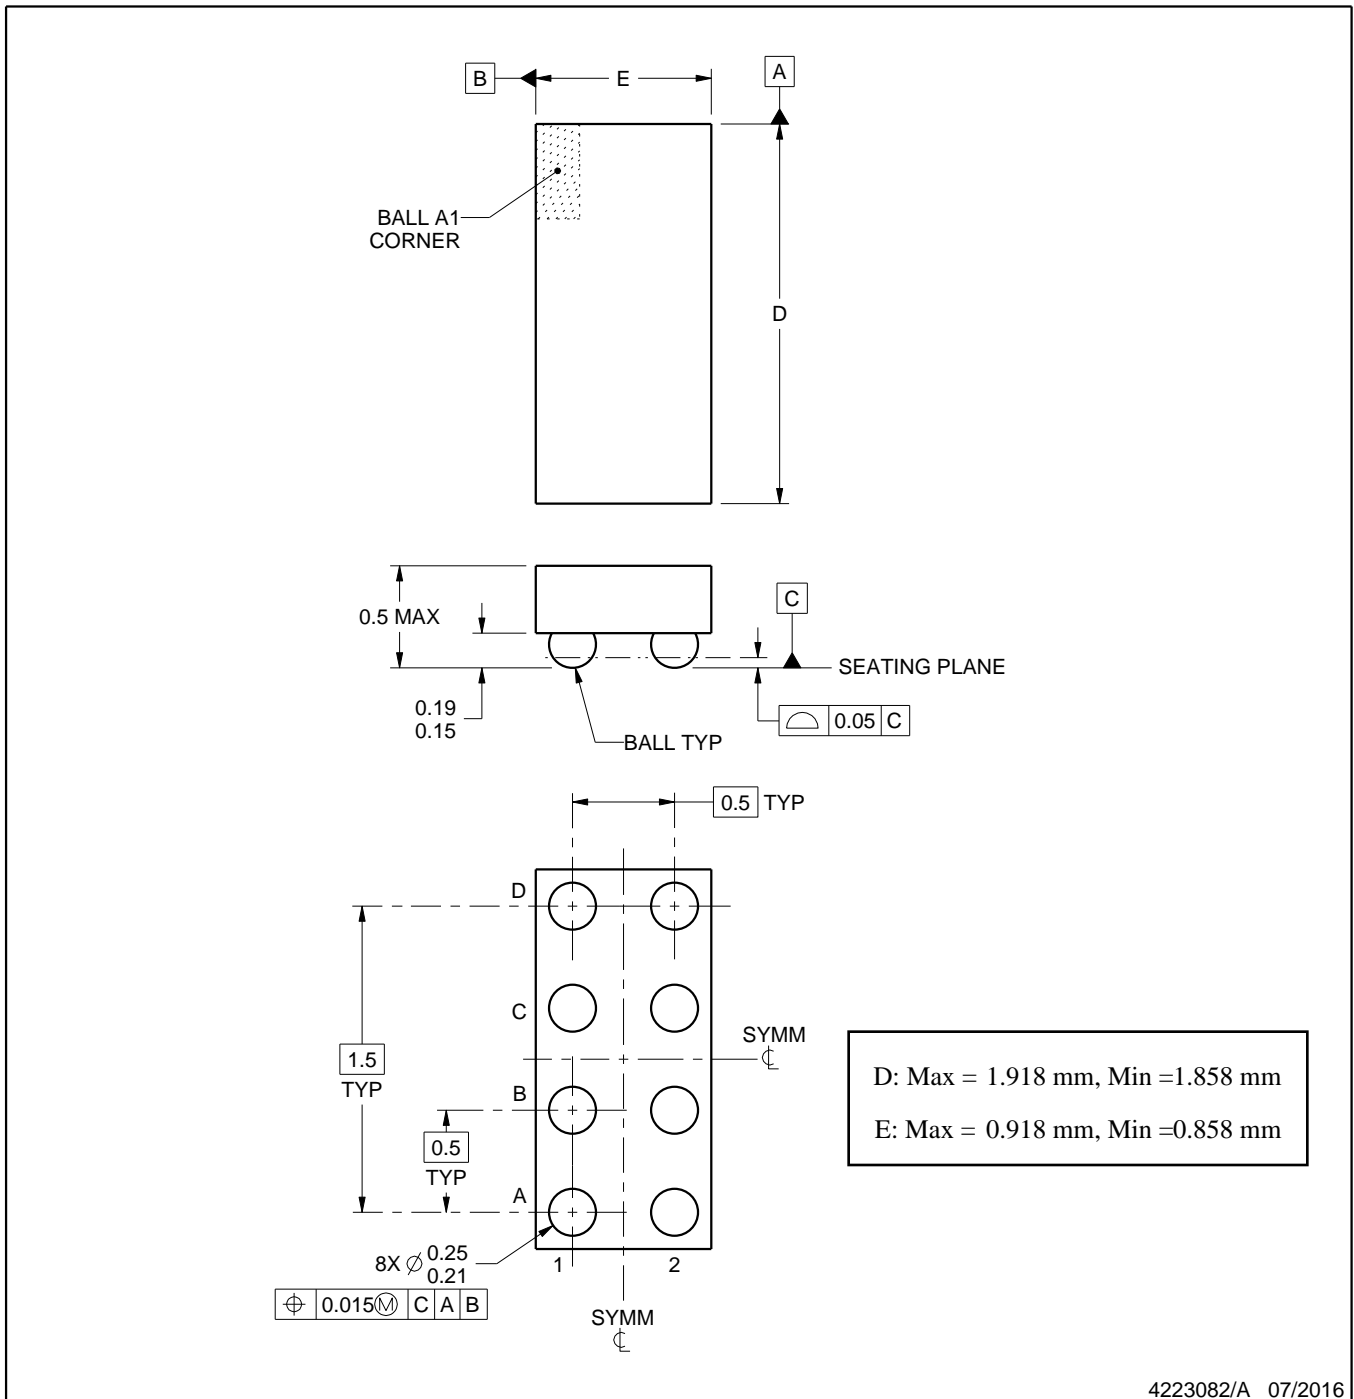

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT

YZP0008

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY



LAND PATTERN EXAMPLE  
SCALE:40X



SOLDER MASK DETAILS  
NOT TO SCALE

4223082/A 07/2016

NOTES: (continued)

3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

# EXAMPLE STENCIL DESIGN

YZP0008

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY



SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:40X

4223082/A 07/2016

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SN74LVC1G99DCTR on WIN SOURCE](#)

 [Texas Instruments](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management