


# Wall / Bottom Mount

# HEH100PA



### Dimension drawing

NOTE :  
 (1) Material : SGCC T=1.0mm  
 (2) Finish : Powder paint 75-120um, Color 7032  
 (3) Dimensional tolerance : ± 1.0mm

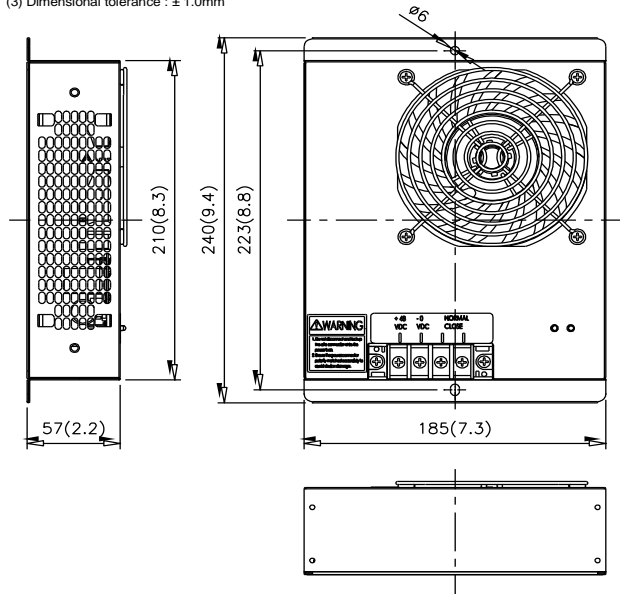

Airflow orientation

### Features

- ◆ Quick heating
- ◆ Constant Air Flow
- ◆ Compact design
- ◆ High efficiency and reliable DC fan
- ◆ Overheat & short protect function
- ◆ Easy for wall mount or bottom mount



| Main feature                | Unit      | Specification                       |
|-----------------------------|-----------|-------------------------------------|
| Outline Dimension           | mm (inch) | 240H x 185W x 57D (9.4 x 7.3 x 2.2) |
| Heating Capacity (note 1)   | W         | 1000 ± 10%                          |
| Airflow rate                | CFM       | 62 (typ.)                           |
| Rated voltage               | VDC       | 48 (typ.)                           |
| Operating voltage range     | VDC       | 40-60                               |
| Operating temperature range | °C        | -40 ~ +65                           |
| Operating current           | A         | 18.1                                |
| Acoustic noise at 1M :      | dB-A      | 65 (typ.)                           |
| Weight                      | Kg (lb)   | 1.5 (3)                             |
| Heating element             | /         | PTC                                 |
| Ingress Protection rating   | IP        | IP20 (IEC60529)                     |

Note 1: The heating capacity (w) is @20 °C (68°F) ambient te

2.2835

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HEH100PA on WIN SOURCE](#)
-  [Delta Electronics Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management