




THE DATASHEET OF
249159002122996



IDC SOCKET WIRE-TO-BOARD: 24-9159-100



General Information

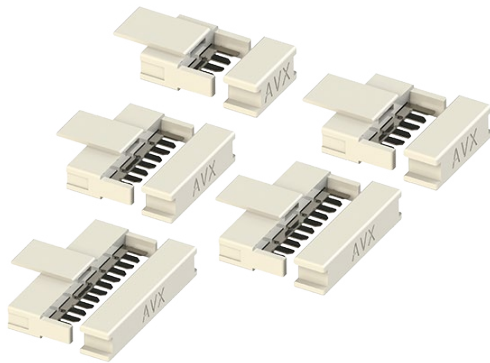

KYOCERA AVX developed the 9159 series of SMT connectors for co-planar PCB mating for the demanding Solid State Lighting (SSL) market. These connectors had to be small, low profile, capable of carrying up to 5 Amps/contact and then operate at up to 125°C for extended periods of time. This application was very unique to the SSL market where PCBs are stacked end-to-end to create linear lighting strips in everything from office to transportation applications.

The IDC cable socket connector allows 22-24AWG discrete or cabled wires to be terminated easily and reliably into a standard 9159 interface connector. This allows power and signals to be connected to a PCB socket connector while providing positive latching. The wire assembly support block allows 2 to 6 wires to be terminated in one step using any standard bench press. IDC covers provide both through-hole (daisy chain applications) and wire-stop termination options.

APPLICATIONS

- Provides Wire-to-Board capabilities to standard 9159 2-Piece connector system
- In conjunction with the IDC plug WTB connector (14-9159), these connectors provide maximum flexibility to bring power and signal wires onto or off of any board level 9159 connector
- Application Notes: Refer to 201-01-123
- Product Specification: Refer to 201-01-119

FEATURES AND BENEFITS

- Mates with standard 9159 horizontal plug, keeping same BTB connector system
- Economical and reliable IDC wire termination
- Molded latch offers positive latching after mating
- UL Approved

ELECTRICAL

- Current Rating: 5 Amps / Contact
- Voltage Rating: 125 VAC (RMS) or DC equivalent

ENVIRONMENTAL

- Operating Temperature: -40°C to +125°C
- Storage Temperature: -40°C to +70°C

MECHANICAL

- Insulator Material: Nylon: UL94V0
- Contact Material: Phos Bronze
- Plating: Gold / Tin over Nickel
- Durability: 10 Cycles

HOW TO ORDER

24	9159	00X	1	X	2	X	X	6																																			
Prefix Right Angle Wired Socket IDC Terminations	Series	Number of Ways	2 Part PCB Strip Connector 2 Part Wired IDC Strip Connector	Wire Gauge 2 = 22AWG 3 = 24AWG	Wire Insulation Diameter ø1.10mm to ø1.60mm	Color 8 = Black 9 = White	Cap Options	Plating Option 6 = Gold on Contact Tin on IDC																																			
		<table border="1"> <thead> <tr> <th>Code</th> <th>No of Ways</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="text-align: center;">Through Wire Cap</td> </tr> <tr><td>002</td><td>2</td></tr> <tr><td>003</td><td>3</td></tr> <tr><td>004</td><td>4</td></tr> <tr><td>005</td><td>5</td></tr> <tr><td>006</td><td>6</td></tr> <tr> <td colspan="2" style="text-align: center;">Wire Stop Cap</td> </tr> <tr><td>002</td><td>2</td></tr> <tr><td>003</td><td>3</td></tr> <tr><td>004</td><td>4</td></tr> <tr><td>005</td><td>5</td></tr> <tr><td>006</td><td>6</td></tr> </tbody> </table>	Code	No of Ways	Through Wire Cap		002	2	003	3	004	4	005	5	006	6	Wire Stop Cap		002	2	003	3	004	4	005	5	006	6					<table border="1"> <thead> <tr> <th>Code</th> <th>Cap Option</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Through Wire</td> <td>Allows wires to be terminated at any point</td> </tr> <tr> <td>9</td> <td>Wire Stop</td> <td>Terminates end of wire. End protected with Stop Face</td> </tr> </tbody> </table>	Code	Cap Option	Description	0	Through Wire	Allows wires to be terminated at any point	9	Wire Stop	Terminates end of wire. End protected with Stop Face	
Code	No of Ways																																										
Through Wire Cap																																											
002	2																																										
003	3																																										
004	4																																										
005	5																																										
006	6																																										
Wire Stop Cap																																											
002	2																																										
003	3																																										
004	4																																										
005	5																																										
006	6																																										
Code	Cap Option	Description																																									
0	Through Wire	Allows wires to be terminated at any point																																									
9	Wire Stop	Terminates end of wire. End protected with Stop Face																																									



SALES DRAWINGS
CLICK TO DOWNLOAD



Safety Standards: UL 1977-File #E90723

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 249159002122996](#) on WIN SOURCE

 [AVX Corp/Kyocera Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management