




**THE DATASHEET OF
PV12-14HDR-D**



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART # | STUD SIZE | DIMENSIONS in. [mm] | | | | |
|----------------|-----------|---------------------|------------------|-------------------|------------------|------------------|
| | | L ± .02 [0,5] | W ± .01 [0,3] | C ± .015 [0,4] | M ± .02 [0,5] | H ± .01 [0,3] |
| PV12-6HDR | #6 | 1.05 [26,7] | .31 [7,9] | .35 [8,9] | .89 [22,6] | .15 [3,8] |
| PV12-8HDR | #8 | 1.05 [26,7] | .31 [7,9] | .35 [8,9] | .89 [22,6] | .17 [4,3] |
| PV12-10HDR | #10 | 1.08 [27,4] | .37 [9,4] | .33 [8,4] | .89 [22,6] | .20 [5,1] |
| PV12-14HDR | 1/4" | 1.23 [31,2] | .52 [13,2] | .42 [10,7] | .97 [24,6] | .27 [6,9] |
| PV12-56HDR | 5/16" | 1.23 [31,2] | .52 [13,2] | .42 [10,7] | .97 [24,6] | .34 [8,6] |
| PV12-38HDR | 3/8" | 1.31 [33,3] | .58 [14,7] | .46 [11,7] | 1.02 [25,9] | .40 [10,2] |

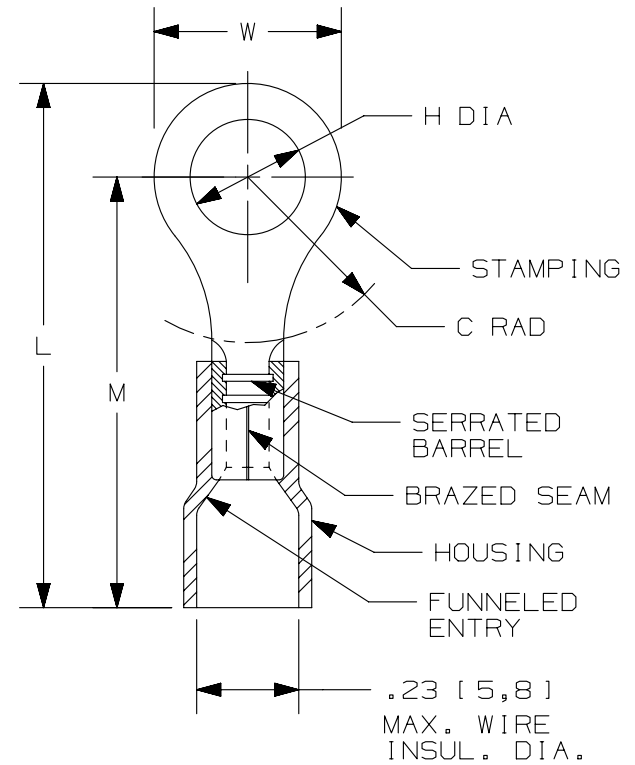

NOTES:

- USED FOR:
 - A. #16-12 AWG [2,0-6,0 mm²] STRANDED COPPER WIRE
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 - C. 600 V. MAX. VOLTAGE RATING
- INSTALLATION TOOLS:
 - A. UL APPROVED: CT-600A (CT-550CH), CT-1550, CT-1551, CT-2500 (CT-2550CH)
 - B. PANDUIT APPROVED: CT-460
- WIRE STRIP LENGTH: 9/32" ^{+1/32} [7,1^{+0,8}]
- MATERIAL:
 - A. STAMPING: .05" [1,3] THK COPPER, TIN PLATED
 - B. HOUSING: VINYL, YELLOW
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT



LISTED
587H
E52164



CERTIFIED
LR31212

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|----------|-----|-----|-----|---|--------|
| 04 | 10.16.12 | JBN | LCA | VMB | REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS. | A41281 |

| | | | |
|---|-----------|----------------------------|-----------------|
| TITLE RING TERMINALS, VINYL INSULATED, HEAVY DUTY #16-12 | | CUSTOMER DRAWING | |
| ITEM REVISION NAME N41281BA/04 | | PANDUIT | |
| DATASET FILE NAME N41281BA_DC/04A | | | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] | | MATERIAL: SEE NOTES | |
| .x ± .1 [2.54] .xxx ± .005 [0.13] .xx ± .01 [0.25] ANGLES ± 5° | | DRAWING NUMBER: A41281 | |
| THIRD ANGLE PROJECTION | | SHT 1 OF 1 | |
| DRAWN BY DAW | DATE - | CHK - | SCALE N.T.S. |
| | | SIZE A | |

D10100DA/15

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PV12-14HDR-D on WIN SOURCE](#)

 [Panduit Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management