



**THE DATASHEET OF
NZ2520SB-133M-END4825A**



Specification of Simple Packaged Crystal Oscillators

- 1. NDK Part Number** NZ2520SB-133M-END4825A
2. NDK Specification Number END4825A
3. Type NZ2520SB
4. Absolute Maximum ratings


	Item	Ratings			Notes
		Min.	Max.	Units	
1	Supply voltage	-0.3	+4.0	V	-
2	Storage temp. rage	-55	+125	°C	-

4. Electrical Specification

	Parameters	SYM.	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Nominal frequency	f _{nom}		##		MHz	-
2	Supply voltage	V _{cc}	3.0	3.3	3.6	V	-
3	Current consumption (Operating)	I _{CC}	-	-	60	mA	at 3.3V, 25°C
4	Current consumption (Stand-by)	I _{ST}	-	-	10	µA	at 3.3V, 25°C
5	Output level	-	CMOS				-
6	Load capacitance	CL			15	pF	-
7	Operating temp. rage	T _{opr}	-40	-	+85	°C	-
8	Overall frequency tolerance	Δf/f _{nom}	-100	-	+100	ppm	*1
9	Output voltage	V _{OL}	-	-	0.2 V _{CC}	V	-
		V _{OH}	0.8 V _{CC}	-	-	V	-
10	Rise time (T _r), Fall time (T _f)	T _r /T _f	-	-	3	ns	0.2V _{CC} to 0.8V _{CC}
11	Symmetry	SYM	45	-	55	%	at 0.5V _{CC}
12	Start-up time	T _{su}	-	-	10	ms	
13	Output wave form	-	Rectangular				-
14	Stand-by function						
	#1 PAD input			# 3 PAD output			
	H level (0.7 V _{CC} to V _{CC}) or ppen			Operating			
	L level (0.3 V _{CC} max.)			High impedance			

*1 'Inclusive of frequency. tolerance (at 25 °C), requery/temperature characteristics, frequency/voltage coefficient.

5. Dimension

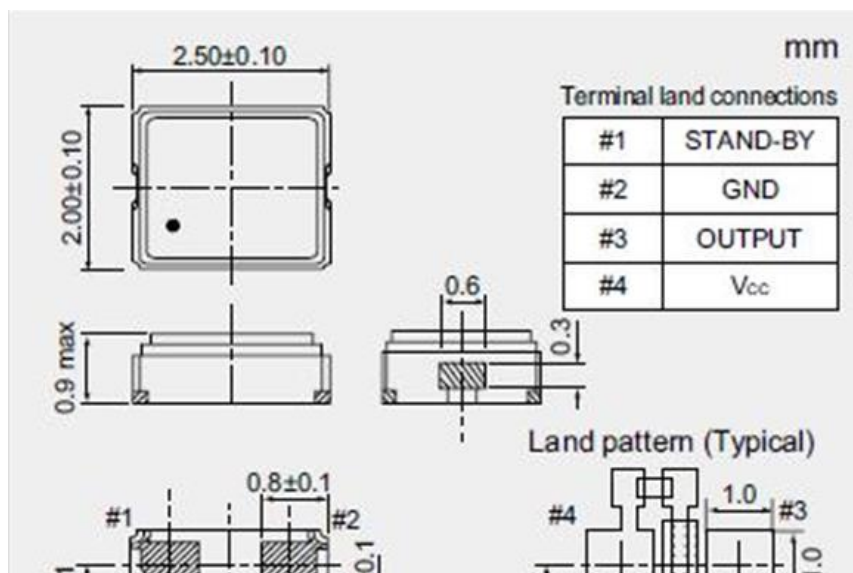



$C_{by}=0.01\mu F$

Mount an approx. $0.01\mu F$ bypass capacitor between V_{cc} and GND
(close to the product)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View NZ2520SB-133M-END4825A on WIN SOURCE](#)
-  [NDK Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management