




**THE DATASHEET OF  
TLR3AWDTE6L00F**





### features

- Ultra low height with a thickness of 0.6mm, suitable for use of small equipment
- Excellent high-frequency characteristics
- Ultra low resistances (0.5mΩ~), suitable for large current sensing
- Suitable for reflow soldering (Not suitable for flow soldering)
- Products meet EU RoHS requirements
- AEC-Q200 Qualified

### dimensions and construction

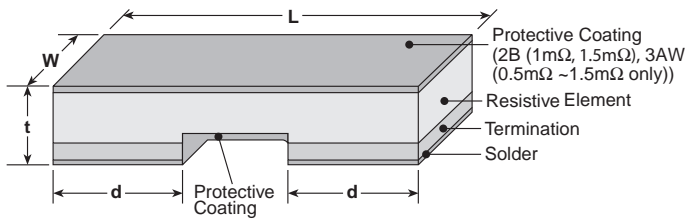

### Derating Curve

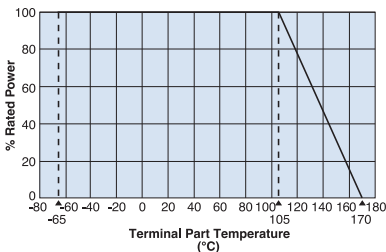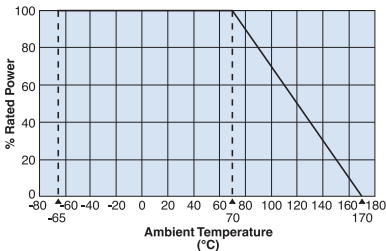

When the terminal part temperature of the resistor exceeds the rated part temperature, the power shall be derated according to the derating curve.

For more details, please visit [www.koaspeer.com](http://www.koaspeer.com) and go to "Resources," then "Technical Information," and select "Derating Curves – Caution & Terms."

Size Code	Resistance Ω	Dimensions inches (mm)			
		L	W	d	t
TLR2B TLR2BN (1206)	1m 1.5m	.126±.008 (3.20±0.20)	.063±.008 (1.60±0.20)	.043±.008 (1.10±0.20)	.024±.008 (0.60±0.20)
	2m, 3m, 4m, 5m, 6m, 7m, 8m, 9m, 10m, 11m, 12m, 13m, 15m, 16m, 18m, 20m			.020±.008 (0.50±0.20)	
TLR2H (2010)	1m	.200±.008 (5.00±0.20)	.100±.008 (2.50±0.20)	.071±.008 (1.80±0.20)	.026±.008 (0.65±0.20)
	2m, 3m, 4m, 5m, 6m, 7m, 8m, 9m, 10m			.060±.008 (1.50±0.20) .020±.008 (0.50±0.20)	
TLR3AW (2512)	0.5m	.25±.01 (6.35±0.25)	.125±.01 (3.18±0.25)	.107±.01 (2.725±0.25)	.024±.01 (0.60±0.25)
	0.68m, 0.75m, 0.82m,			.105±.01 (2.675±0.25)	
	1m, 1.5m, 2m, 3m, 4m			.087±.01 (2.20±0.25)	
	5m, 6m, 7m, 8m			.047±.01 (1.20±0.25)	
9m, 10m	.030±.01 (0.77±0.25)				

### ordering information

<b>TLR</b>	<b>3AW</b>	<b>D</b>	<b>TE</b>	<b>2L00</b>	<b>F</b>	<b>75</b>
Type	Power Rating 2BN: 0.5W 2B: 0.5W 2H: 1W 3AW: 2W	Termination Material D: SnAgCu	Packaging TE: 8mm pitch embossed plastic (3AW) TE: 4mm pitch embossed plastic (2H only) TD: 4mm pitch punched paper (2B/2BN only)	Nominal Resistance ±1%: 4 digits All values less than 0.1Ω (100m) are expressed in mΩ with "L" as decimal Ex: 2mΩ = 2L00	Tolerance F: ±1%	T.C.R. 50ppm/°C 75ppm/°C Blank: 150ppm/°C

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/31/25

### applications and ratings

Part Designation	Power Rating	Rated Ambient Temperature	Rated Terminal Part Temperature	T.C.R. (ppm/°C) Max.*	Standard Resistance (Ω)	Resistance Tolerance	Operating Temperature Range
TLR2B (1206)	0.5W	70°C	105°C	±50	2m,3m,4m,5m,6m,7m,8m,9m,10m,11m,12m,13m,15m,16m,18m,20m	F: ±1%	-65°C to +155°C** -65°C to +170°C**
±75				1m,1.5m,2m,3m,4m,5m,6m,7m,8m,9m,10m,11m,12m,13m,15m,16m,18m,20m			
±150				1m,1.5m,2m,3m,4m,5m,6m,7m,8m,10m,11m,12m,13m,15m,16m,18m,20m			
TLR2BN (1206)	1W	70°C	105°C	±50	1m,2m,3m,4m,5m,6m,7m,8m,9m,10m	F: ±1%	-65°C to +155°C** -65°C to +170°C**
±75							
±150							
TLR2H (2010)	2W	70°C	105°C	±50	2m,3m,4m,5m,6m,7m,8m,9m,10m	F: ±1%	-65°C to +155°C** -65°C to +170°C**
±75				0.5m,0.68m,0.75m,0.82m,1m,1.5m,2m*,3m,4m,5m,6m,7m,8m,9m,10m			
±150							



\* Contact factory for 2mΩ dimensions

\*\* Please reference High Temperature Performance Characteristics in the below table

If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.

### environmental applications

#### One-Pulse Limiting Electric Power

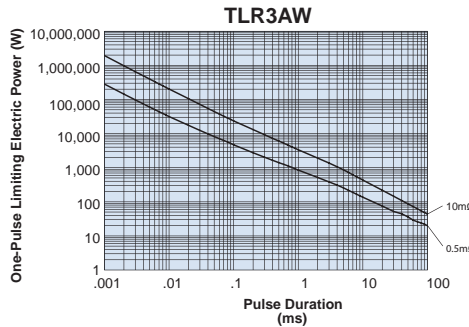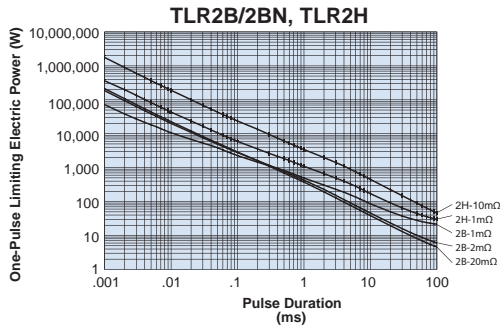


Please ask us about the resistance characteristic of continuous applied pulse. The pulse endurance values are not assured values, so be sure to check the products on actual equipment when you use them.

#### Thermal Resistance

Type	Size	Resistance (Ω)	Rth (°C/W)
TLR	2B 2BN	1m	11.8
		2m	18.3
		20m	116
	2H	1m	17
		10m	61.1
	3AW	0.5m	6
10m		62	

$$R_{th} = (H_s - t_s) / \text{Power}$$

Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions. Please refer to us before use.

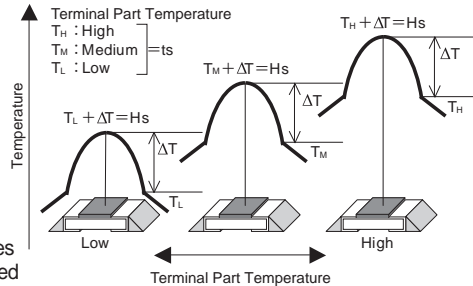

The temperature of the resistor will increase the same  $\Delta T$  from the standard terminal part temperature regardless of the ambient temperature when the same power is applied. This is because there is hardly any heat dissipation from the resistor surface to the ambient air.

#### Performance Characteristics

Parameter	Requirement $\Delta R$ ±%		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C
Resistance to Solder Heat	±0.5%	±0.3%	260°C ± 5°C, 10 seconds +2/-0 seconds
Rapid Change of Temperature	±0.5%	±0.4%	-55°C (15 minutes) / +150°C (15 minutes), 1000 cycles
Moisture Resistance	±0.5%	±0.1%	MIL-STD-202, Method 106, 0% power, 7a and 7b not required
Biased Humidity	±0.5%	±0.1%	85°C ± 2°C, 85% RH, 1000 hours, 10% bias
Endurance (Ambient Temp.)	±1.0%	±0.3%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure**	±1.0%	±0.6%	±155°C (2B, 2H, 3AW), 1000 hours
	±2.0%	—	±170°C (2B, 2H, 3AW), 1000 hours

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/10/24

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TLR3AWDTE6L00F on WIN SOURCE](#)

 [KOA Speer Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management