



**THE DATASHEET OF
PJS008U-3000-0**



SPECIFICATIONS:

Insulation Resistance: 1,000MΩ min. at 500V DC
 Withstanding Voltage: 500V AC for 1min
 Voltage Rating: AC 50Vrms
 Current Rating: 0.5A
 Contact Resistance: 80mohms initial
 Operating Temp.: - 40°C ~ +85°C
 Mating Cycle: 10,000 times

MATERIALS AND FINISH:

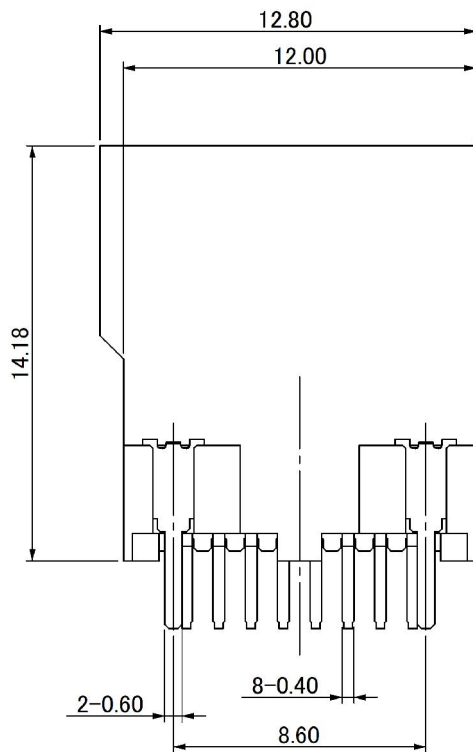
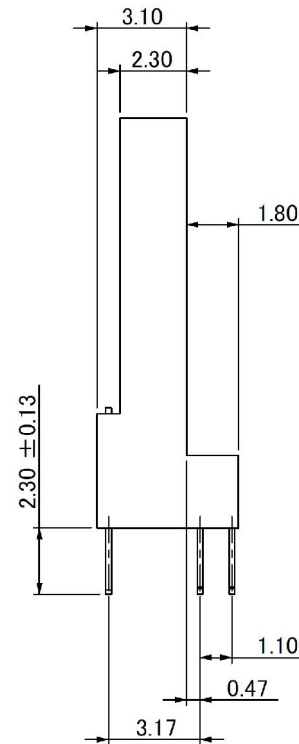
- Contacts: Ni-Au/SnCu Alloy
- Insulator: LCP
- Metal Shell: Stainless Steel

FEATURES:

- Vertical SMT mount
- Low operating temperature tolerance (-40°C)
- RoHS and REACH Compliant

PART NUMBER:
PJS008U-300X-0

| | |
|--|---|
| Series Name | ↑ |
| 8 Pins Micro SD | ↑ |
| Pick & Place Cap: 1 = With Cap 0 = Without Cap | ↑ |


OUTLINE DIMENSIONS (mm):

Front View

Side View

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PJS008U-3000-0 on WIN SOURCE](#)

 [Yamaichi Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management