



**THE DATASHEET OF
PV14-38R-M**



Custom Color Insulation Sleeves

Applications:

Equipment manufacturers that prefer a non-standard color scheme to:

1. Comply to performance requirements
(Example: military camouflage)
2. Improve item identification during assembly and maintenance
3. Strengthen brand identity

Customer Concern:

A manufacturer of amusement rides required insulated terminal products that had very little appearance in low light areas. The appearance of the wiring would reduce the impact of the entertainment experience.

Panduit Solution:

Custom Color Insulated Terminal Products.

Modified colorant was added to the vinyl insulation material. Samples were checked with the customer to verify a color match. The colorant did not alter the electrical or mechanical performance of the vinyl insulated terminal products. The part dimensions were maintained, which prevented any required change of crimp tools, dies, or UL certification.

Application Considerations:

Consult factory to match specific color for your application. The ability to identify wire range from industry standard [Red (18 – 22 AWG); Blue (14 – 16 AWG); Yellow (10 – 12 AWG)] is lost when non-standard colors are used, as it is difficult to differentiate barrel sizes when insulation housings are all the same color.



PV14-10R with Standard Blue Color Insulation




PV14-10R with Custom Color Black Insulation



PV14-10R with Custom Color Green Insulation

Custom Color Insulation Sleeves

Loose Piece

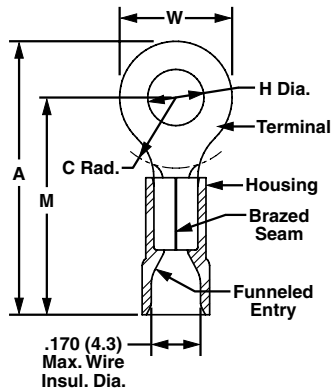

Part Number		Stud Size	Dimensions In. (mm)					Crimp Tool
			A ± 0.03	W ± 0.01	C ± 0.02	M ± 0.03	H ± 0.01	
PV14-4R	-C -M	#4	.84 (21.3)	.25 (6.4)	.19 (4.8)	.71 (18.0)	.12 (3.1)	CT-100A, CT-1550, CT-1551
PV14-6RN	-C -M	#6	.84 (21.3)	.25 (6.4)	.19 (4.8)	.71 (18.0)	.15 (3.8)	
PV14-6R	-C -M	#6	.92 (23.4)	.31 (7.9)	.25 (6.4)	.76 (19.3)	.15 (3.8)	
PV14-8R	-C -M	#8	.92 (23.4)	.31 (7.9)	.25 (6.4)	.76 (19.3)	.17 (4.3)	
PV14-10R	-C -M	#10	.92 (23.4)	.31 (7.9)	.25 (6.4)	.76 (19.3)	.20 (5.1)	
PV14-14R	-C -M	1/4"	1.12 (28.5)	.46 (11.7)	.38 (9.7)	.89 (22.6)	.27 (6.9)	
PV14-56R	-C -M	5/16"	1.12 (28.5)	.46 (11.7)	.38 (9.7)	.89 (22.6)	.34 (8.6)	
PV14-38R	-L -M	3/8"	1.21 (30.7)	.53 (13.5)	.43 (10.9)	.94 (23.9)	.40 (10.2)	
PV14-12R	-L	1/2"	1.42 (36.1)	.72 (18.3)	.53 (13.5)	1.06 (26.9)	.52 (13.2)	

Notes:

- UL Listed and CSA Certified for:
 - 600 V maximum voltage rating (1000 V maximum in signs, fixtures, and luminaries)
 - 18 – 14 AWG solid or stranded copper wire and 221°F (105°C) maximum temperature rating, with the CT-1550 and CT-1551 installation tools
 - 16 – 14 AWG solid or stranded copper wire and 167°F (75°C) maximum temperature rating, with the CT-100A installation tools
- RoHS compliant
- Material:
 - Stamping – .032 (.8) thick tin-plated copper
 - Housing – Vinyl, Custom Specified Color
- Strip length: 5/16+1/32" / -0
- Dimensions in brackets are in millimeters
- Package qty.:
 - (Std. pkg. qty.) – L = 50 pcs.
 - (Std. pkg. qty.) – C = 100 pcs.
 - (Bulk pkg. qty.) – M = 1000 pcs.

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT[®]

©2015 Panduit Corp.
ALL RIGHTS RESERVED.
TMAN17--WW-ENG
replaces WW-TMAN06
12/2015

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PV14-38R-M on WIN SOURCE](#)

 [Panduit Corp Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management