




THE DATASHEET OF OPI7010



Optically Coupled Isolator

OPI7002, OPI7002RCE, OPI7010, OPI7010RCE
 OPI7320RCE, OPI7340RCE

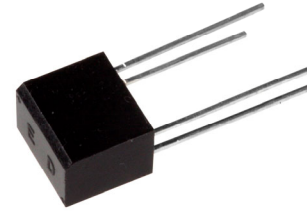

Features:

- ± 6 kV dc electrical isolation
- Inexpensive plastic housing
- Choice of phototransistor or photodarlington output
- UL registered File No. E58730

Description:

Each **OPI7002** and **OPI7010** consists of an infrared emitting diode coupled to a NPN silicon phototransistor. The LED and sensor are encased in a black, low-cost plastic housing. Pin spacing is compatible with standard dual-in-line packages.

Each **OPI7320RCE** and **OPI7340RCE** consists of an infrared emitting diode coupled to a NPN silicon photodarlington. The LED and sensor are encased in a high dielectric plastic housing. Pin spacing is compatible with standard dual-in-line packages.

The RCE versions reverse the Phototransistor Emitter and Collector pin-out.


Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications:


- Requiring high voltage isolation between input and output
- Electrical isolation in dirty environments
- Industrial equipment
- Medical equipment
- Office equipment

Ordering Information							
Part Number	LED Peak Wavelength	Sensor	Isolation Voltage (,000)	CTR Min	I _F (mA) Typ / Max	V _{CE} (Volts) Max	Lead Length / Spacing
OPI7002	890 nm	Transistor	6	20	10 / 50	30	0.30" / 0.30"
OPI7010				100			
OPI7320RCE	890 nm or 935 nm	Darlington	6	200	5 / 50	15	0.30" / 0.30"
OPI7340RCE				400			



OPI7002, OPI7010





OPI7002RCE, OPI7010RCE



OPI7320RCE, OPI7340RCE

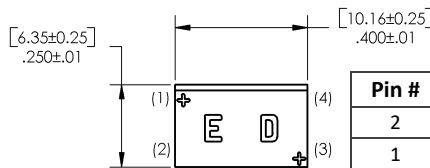

Pin #	LED	Pin #	Transistor/ RCE
2	Cathode	3	Collector / Emitter
1	Anode	4	Emitter / Collector

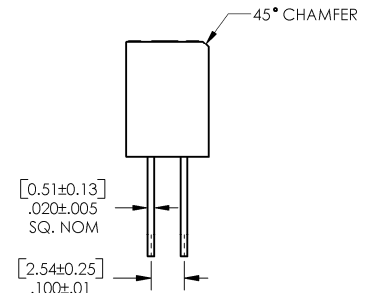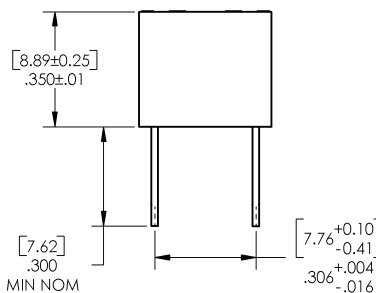

RoHS

DIMENSIONS ARE IN: [MILLIMETERS] INCHES

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
 2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
 www.ttelectronics.com | sensors@ttelectronics.com

Optically Coupled Isolator

OPI7002, OPI7002RCE, OPI7010, OPI7010RCE
OPI7320RCE, OPI7340RCE



Electrical Specifications

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Operating Temperature Range	-40° C to +85° C
Storage Temperature Range	-40° C to +85° C
Input-to-Output Isolation Voltage ⁽¹⁾⁽⁴⁾	±6 kVDC
Lead Soldering Temperature [1/16 inch (1.6 mm) from the case for 5 seconds with soldering iron ⁽²⁾	260° C
Input Diode	
Forward DC Current	50 mA
Peak Forward current (1 μs pulse width, 300 pps)	3 A
Reverse Voltage	2 V
Power Dissipation ⁽³⁾	100 mW
Output Phototransistor	
Collector-Emitter Voltage OPI7002, OPI7010, OPI7002RCE, OPI7010RCE	30 V
OPI7320RCE, OPI7340RCE	15 V
Emitter-Collector Voltage	5.0 V
Power Dissipation ⁽³⁾	100 mW

Notes:

- (1) Measured with input leads and output leads shorted.
- (2) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (3) Derate linearly 1.66 mW/° C above 25° C.
- (4) UL recognition is for 6kV dc for one minute

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Optically Coupled Isolator

OPI7002, OPI7002RCE, OPI7010, OPI7010RCE
OPI7320RCE, OPI7340RCE



Electrical Specifications

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input Diode (See OP140 or OP240 for additional information—for reference only)						
V_F	Forward Voltage	-	1.2	1.70	V	$I_F = 10\text{ mA}$
I_R	Reverse Current	-	-	100	μA	$V_R = 2.0\text{ V}$
Output Phototransistor (OPI7002, OPI7010) (See OP550 for additional information—for reference only)						
Output Photodarlington (OPI7320, OPI7340) (See OP560 for additional information—for reference only)						
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage OPI7002/RCE, OPI7010/RCE OPI7320RCE, OPI7340RCE	30 15	- -	- -	V	$I_C = 100\ \mu\text{A}, I_F = 0$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	5	-	-	V	$I_E = 100\ \mu\text{A}, I_F = 0$
I_{CEO}	Collector-Emitter Dark Current	-	-	100	nA	$V_{CE} = 10\text{ V}, I_F = 0$
Coupled						
I_C/I_F	DC Current Transfer Ratio OPI7002, OPI7002RCE OPI7010, OPI7010RCE OPI7320RCE OPI7340RCE	20 100 200 400	- - - -	- - - -	%	$I_F = 10\text{ mA}, V_{CE} = 5\text{ V}$ $I_F = 10\text{ mA}, V_{CE} = 5\text{ V}$ $I_F = 5\text{ mA}, V_{CE} = 5\text{ V}$ $I_F = 5\text{ mA}, V_{CE} = 5\text{ V}$
$V_{(SAT)}$	Collector-Emitter Saturation Voltage OPI7002/RCE, OPI7010/RCE OPI7320RCE, OPI7340RCE	- -	- -	0.4 1.0	V	$I_F = 10\text{ mA}, I_C = 0.50\text{ mA}$ $I_F = 5\text{ mA}, I_C = 2\text{ mA}$
V_{ISO}	Isolation Voltage ⁽¹⁾	6	-	-	kVDC	See note 1
$T_{(ON)}$	Turn-On Time OPI7002/RCE, OPI7010/RCE OPI7320RCE, OPI7340RCE	- -	4 150	- -	μs	$V_{CE} = 10\text{ V}, I_C = 10\text{ mA}, R_L = 100\ \Omega$
$T_{(OFF)}$	Turn-Off Time OPI7002/RCE, OPI7010/RCE OPI7320RCE, OPI7340RCE	- -	3 125	- -		
C_{IO}	Capacitance Input-to-Output ⁽¹⁾	-	0.2	-	pF	$V_{IO} = 0, F = 1\text{ MHz}$

Notes:

- (1) Measured with input leads and output leads shorted.


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View OPI7010 on WIN SOURCE](#)

 [TT Electronics](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management