



The evolution of technology has brought the need to communicate everywhere and at all times without being confined to one space. Our internal wireless device antennas feature wide bandwidth to enhance the performance and application of portable wireless devices based on standards such as 802.11 and Bluetooth®. The antennas are specifically designed to be embedded inside devices for aesthetically pleasing integration with high durability.

Features and Benefits

- Covers 2.4 to 2.5 GHz and 4.9 to 6 GHz for all WLAN applications
- Coaxial cable pigtail with various connector choices
- Omnidirectional patterns and all frequencies with increased gain in upper bands for optimal coverage
- Conformance to European RoHS Directive


Specifications						
Part Numbers	CAF94505, MAF95090, MAF94158			ENB2449A1-10MHL4, ENB2449A1-20UFL		
Operating Frequency (MHz)	2400-2500	5150-5350	5600-6000	2400-2500	5150-5350	5600-6000
Peak Gain – Max (dBi)	2	3.9	4	3.19	4.1	4.35
VSWR – Max				2:1		
Nominal Impedance (Ohms)				50		
Polarization				Vertical, Omnidirectional		
Dimensions – cm (in.)				4.95 x 1.64 x .152 (1.94 x 0.65 x .06)		
Material Substance Compliance				RoHS		
Operating Temperature – °C (°F)				-30 to +70 (-22 to +158)		
Storage Temperature – °C (°F)				-40 to +85 (-40 to +185)		

1 Configuration

Part Number	Cable Length	Connector
CAF94505	100 mm, Ø 1.13 mm	IPEX MHF
MAF95090	175 mm, Ø 1.13 mm	IPEX MHF
MAF94158	279.4 mm, Ø 1.13 mm	IPEX MHF
ENB2449A1-10MH4L	100 mm, Ø 1.13 mm	IPEX MHF4L
ENB2449A1-20UFL	200 mm, Ø 1.13 mm	IPEX MHF
ENB2449B1-10MH4L*	100 mm, Ø 1.13 mm	IPEX MHF4L

*This antenna is the same as the ENB2449A1-10MH4L, with the only difference being that the MHF4L connector is rotated 180°.

Note: Specifications are based on the 100mm cable length, standard antenna version with MHF1 / U.FL connector. Varying the cable length or type or connector will cause variations in these antenna specifications.

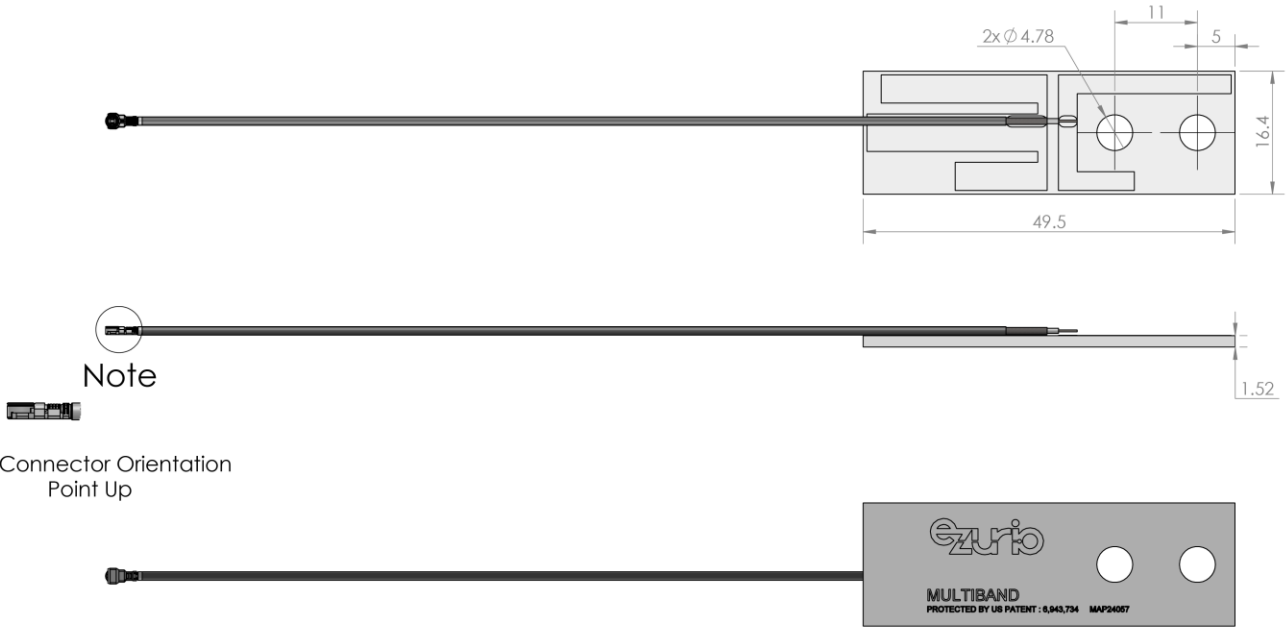

2 Flat Surface Antenna Measurements

Flat surface measurements were performed with the antenna in free space.

2.1 VSWR

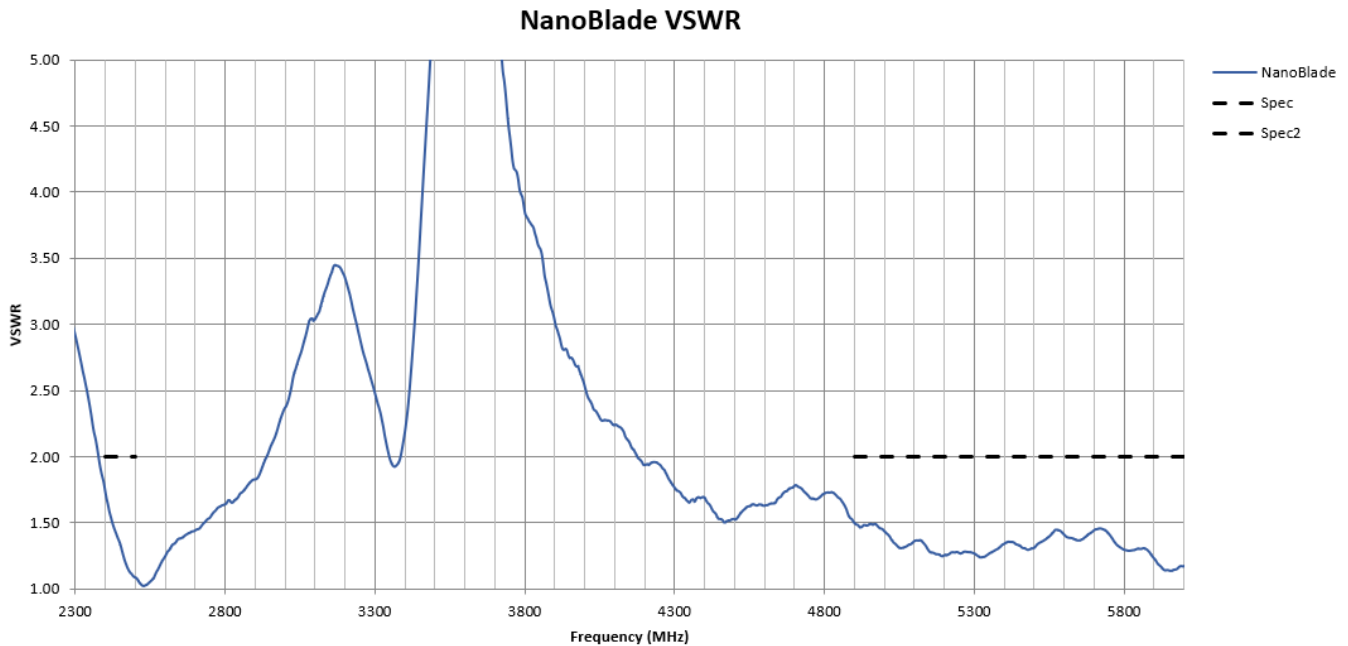


Figure 1: Antenna VSWR measured in free space

2.2 RETURN LOSS

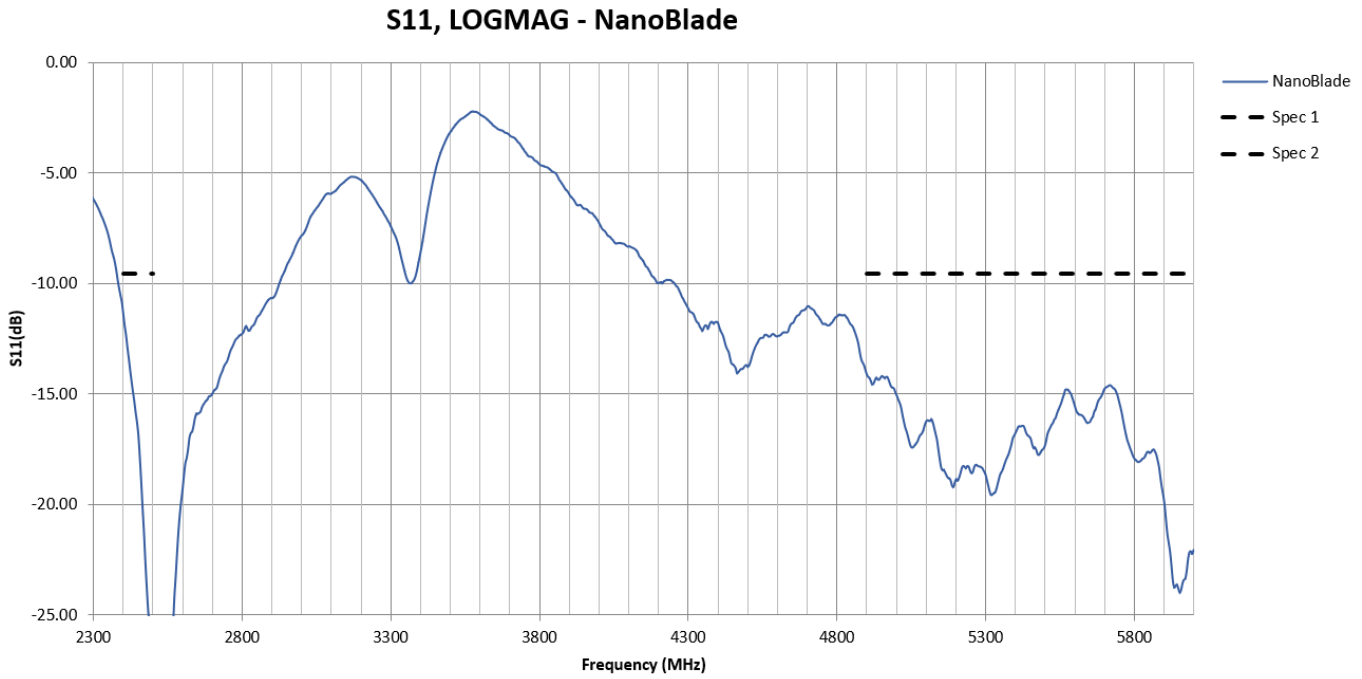


Figure 2: Antenna Return Loss measured in free space

3 Antenna Chamber Test Setup

Antenna measurements such as VSWR and S11 were measured with an Agilent E5071C vector network analyzer. Radiation patterns were measured with a Rohde & Schwarz ZNB8-4PORT vector network analyzer in a Howland Company 3100 chamber equivalent. Phase center is nine inches above the Phi positioner.

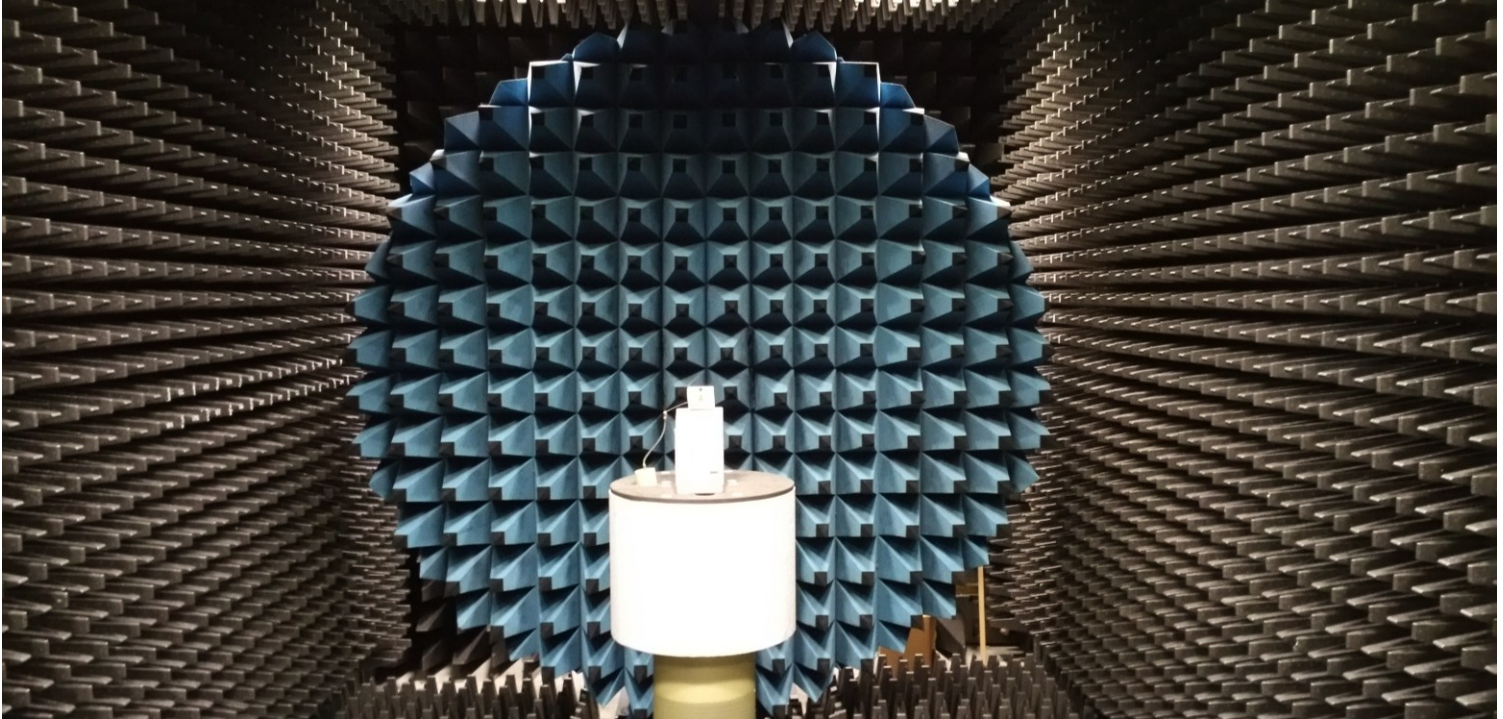


Figure 3: Howland Company 3100 Antenna chamber

4 Antenna Radiation Performance

4.1 Nanoblade centered in free space


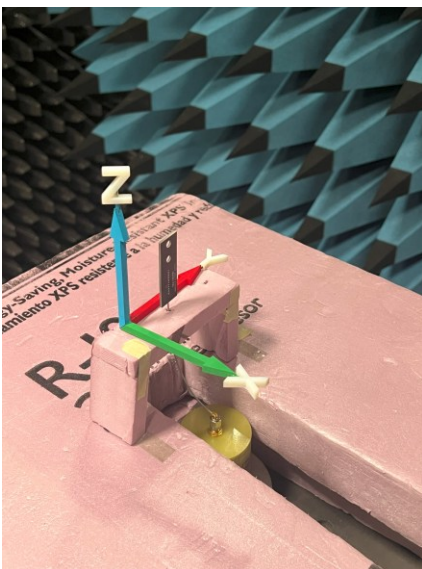


Figure 4: Flat surface setup




3D Measurement Coordinate System

XY-Plane: Azimuth Plane
XZ-Plane: $\Phi=0^\circ$ Plane
YZ-Plane: $\Phi=90^\circ$ Plane



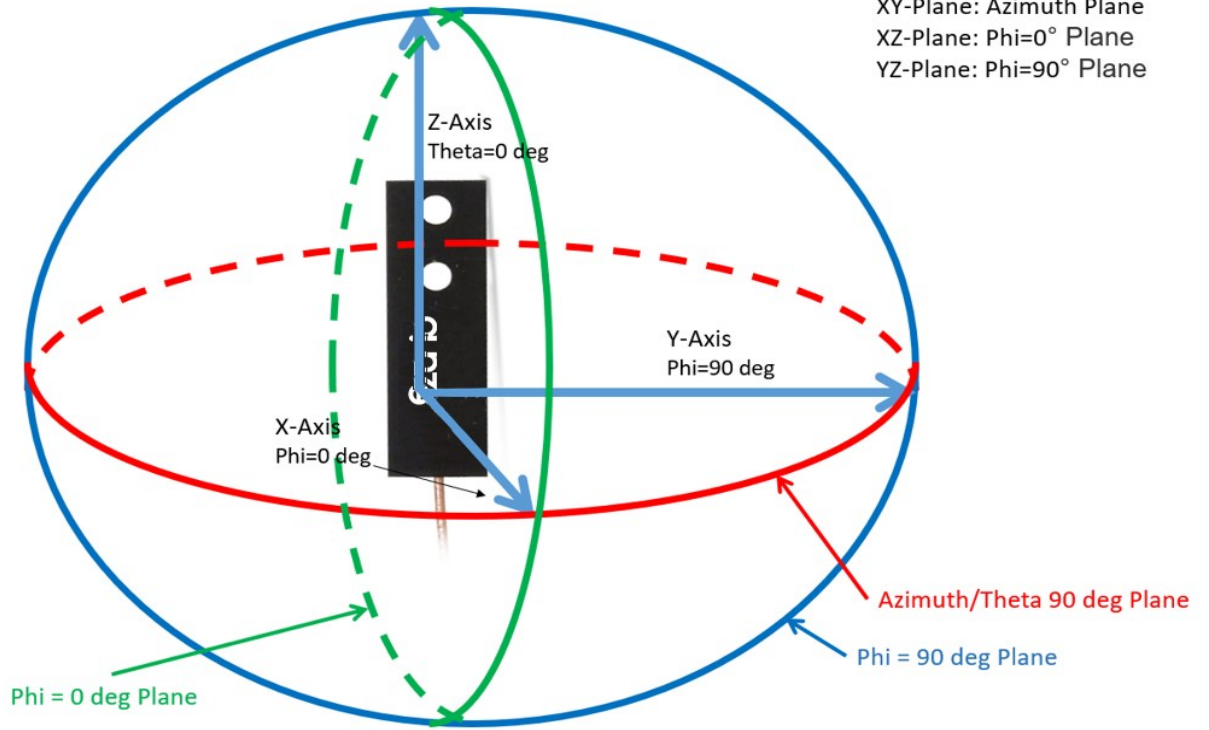


4.2 RADIATION PATTERNS – 2D Plots




4.2.1 2D Plots at 2400 MHz

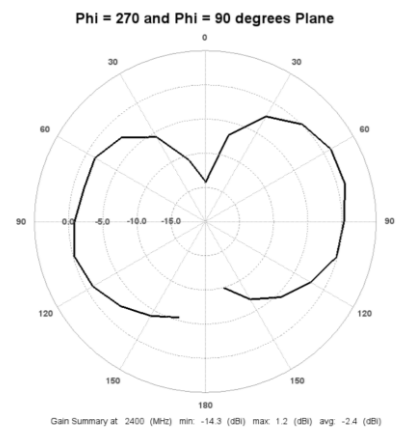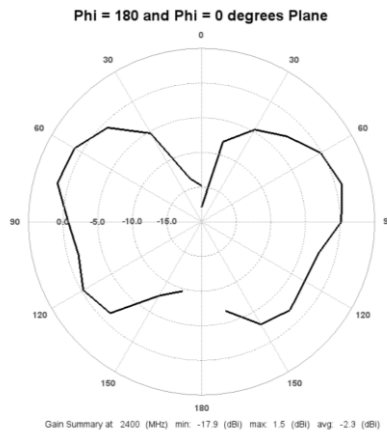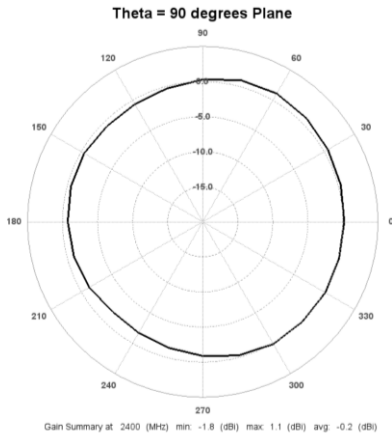




4.2.2 2D Plots at 2440 MHz

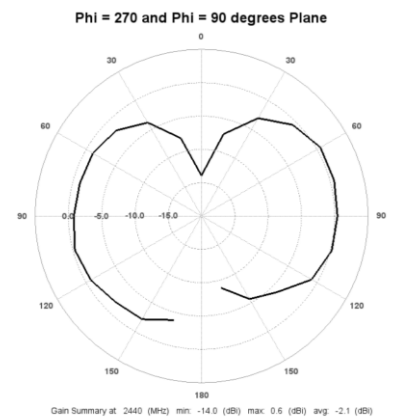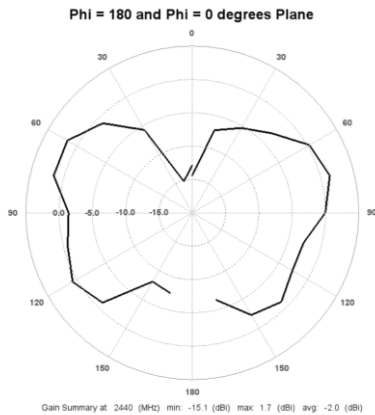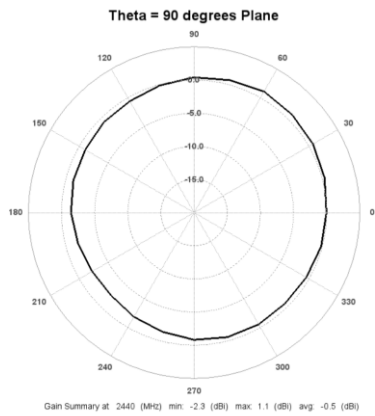




4.2.3 2D Plots at 2480 MHz

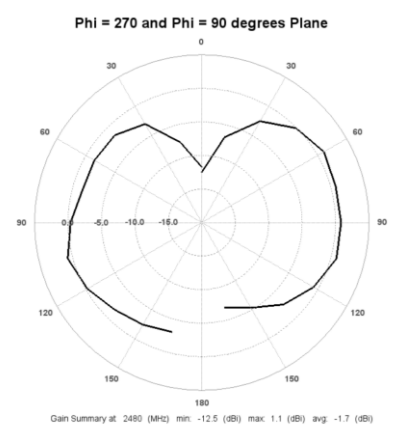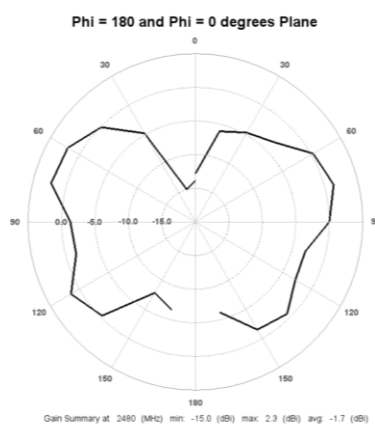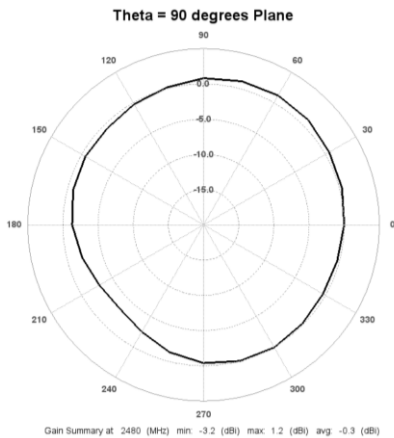




4.2.4 2D Plots at 5100 MHz

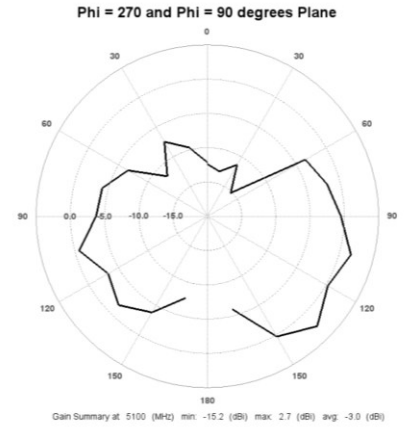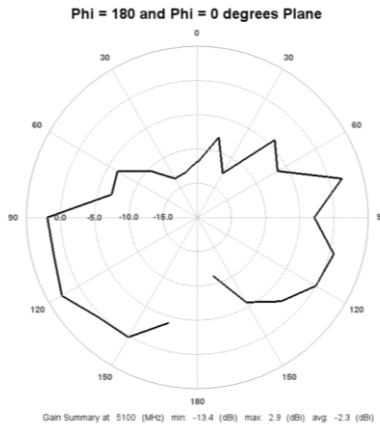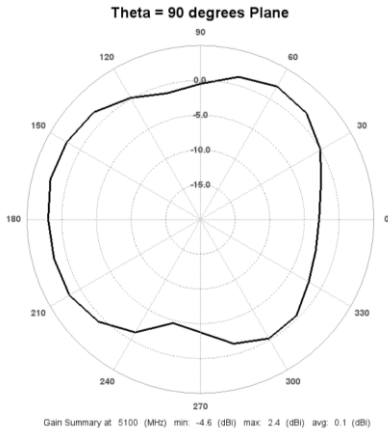

4.2.5 2D Plots at 5500 MHz

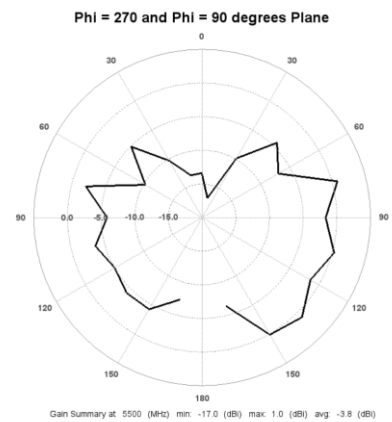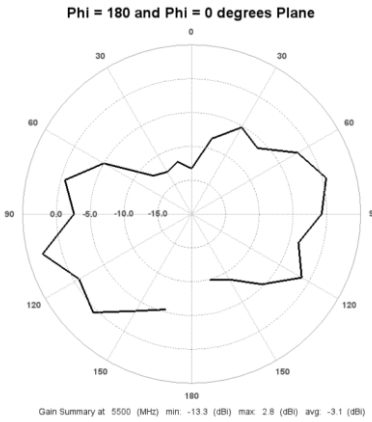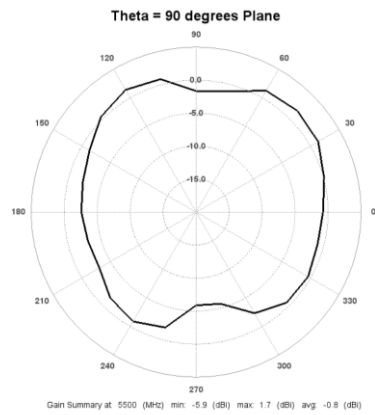

4.2.6 2D Plots at 6000 MHz

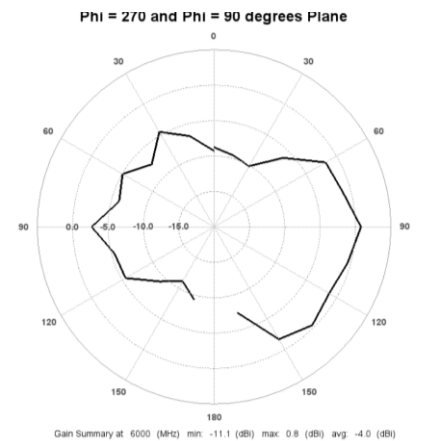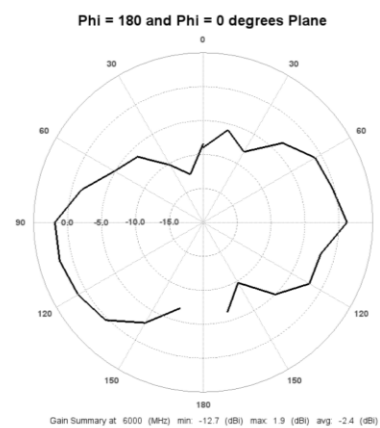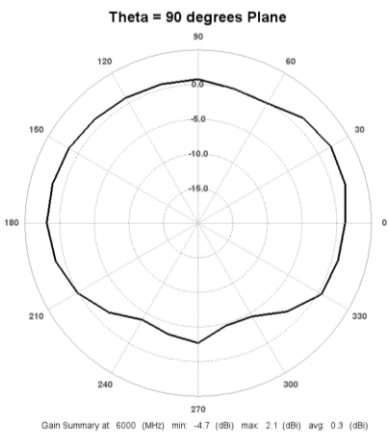

4.3 RADIATION PATTERNS – 3D Plots

4.3.1 3D Plots at 2400 MHz

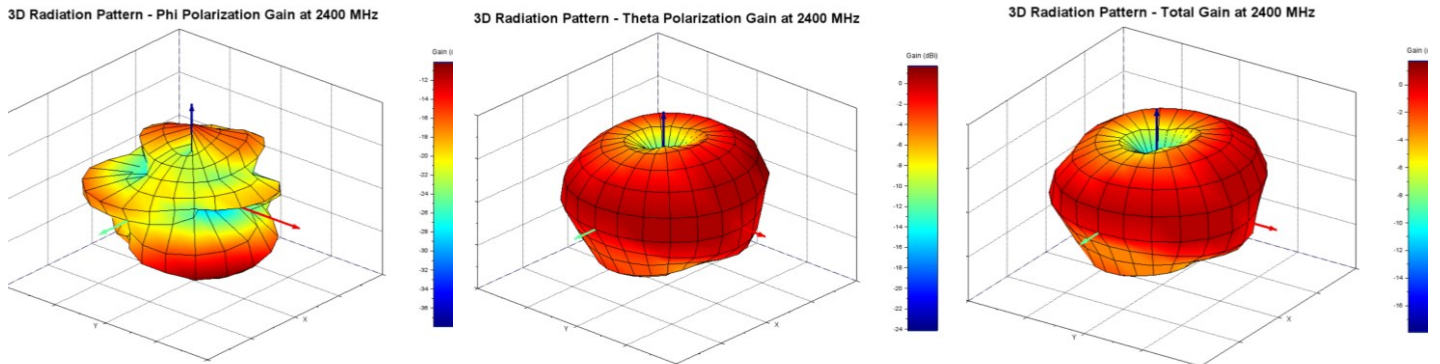


Figure 5: Phi polarization, Theta polarization and, and total gain plots – 2400 MHz

4.3.2 3D Plots at 2440 MHz

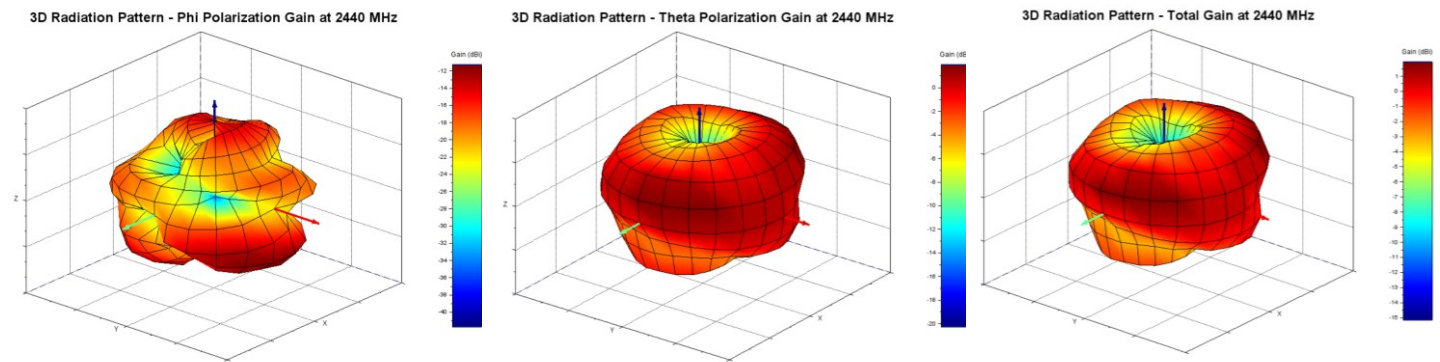


Figure 6: Phi polarization, Theta polarization and, and total gain plots – 2440 MHz

4.3.3 3D Plots at 2480 MHz

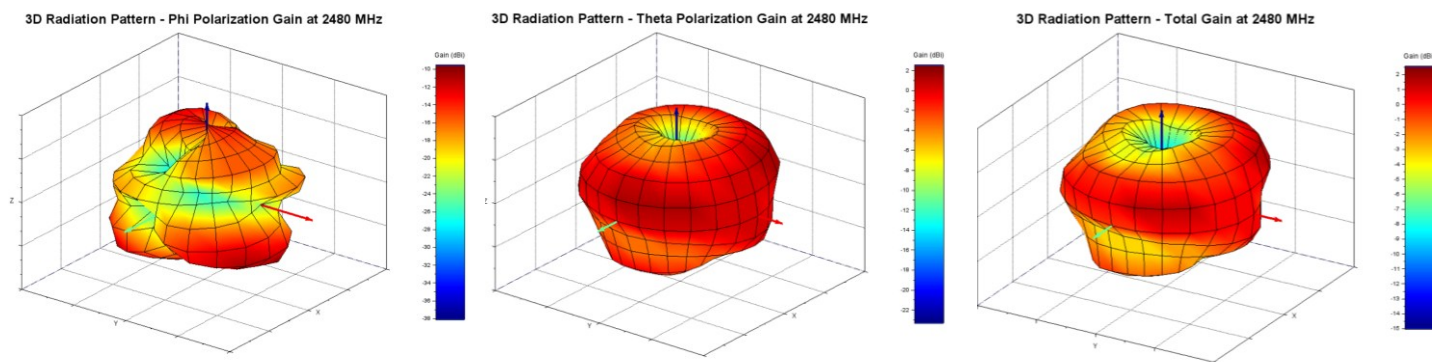


Figure 7: Phi polarization, Theta polarization and, and total gain plots – 2480 MHz

4.3.4 3D Plots at 5100 MHz

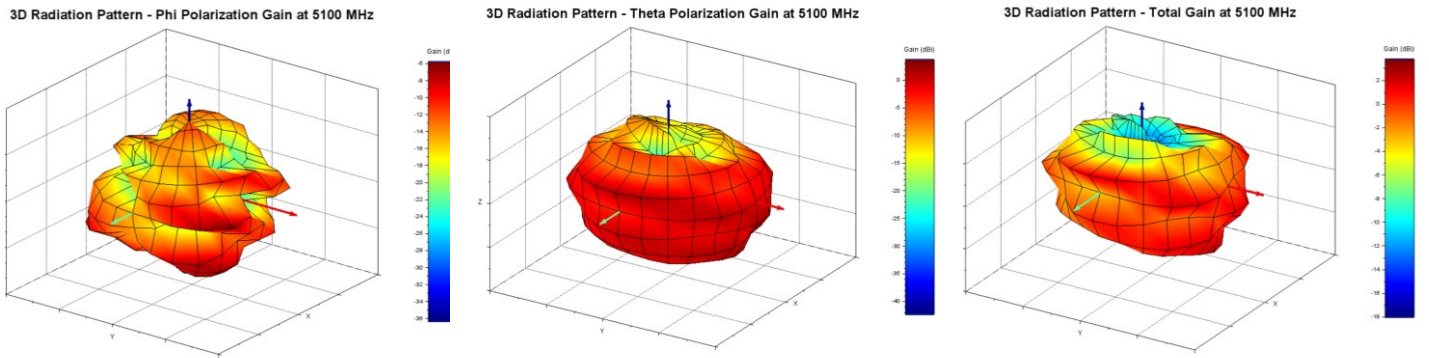


Figure 8: Phi polarization, Theta polarization and, and total gain plots - 5100 MHz

4.3.5 3D Plots at 5500 MHz

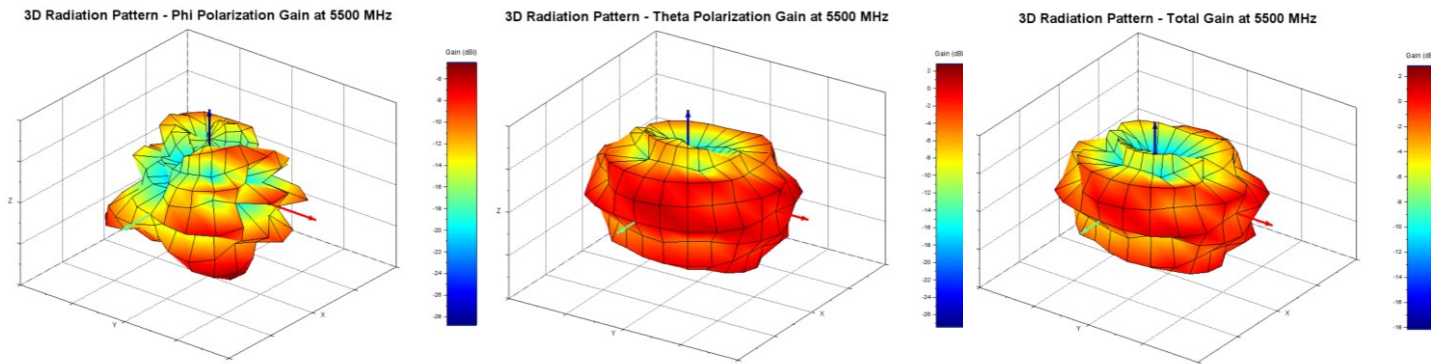


Figure 9: Phi polarization, Theta polarization and, and total gain plots - 5500 MHz

4.3.6 3D Plots at 6000 MHz

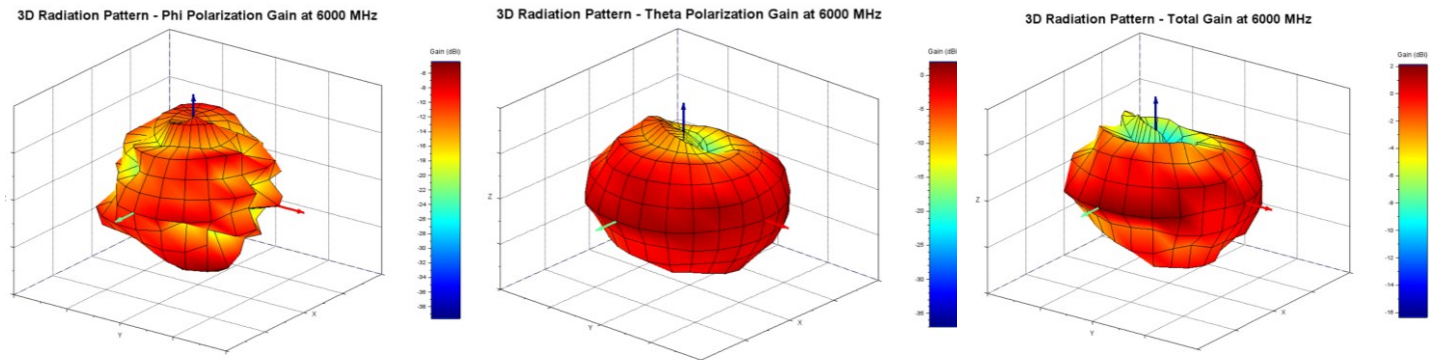


Figure 10: Phi polarization, Theta polarization and, and total gain plots - 6000 MHz

4.4 EFFICIENCY

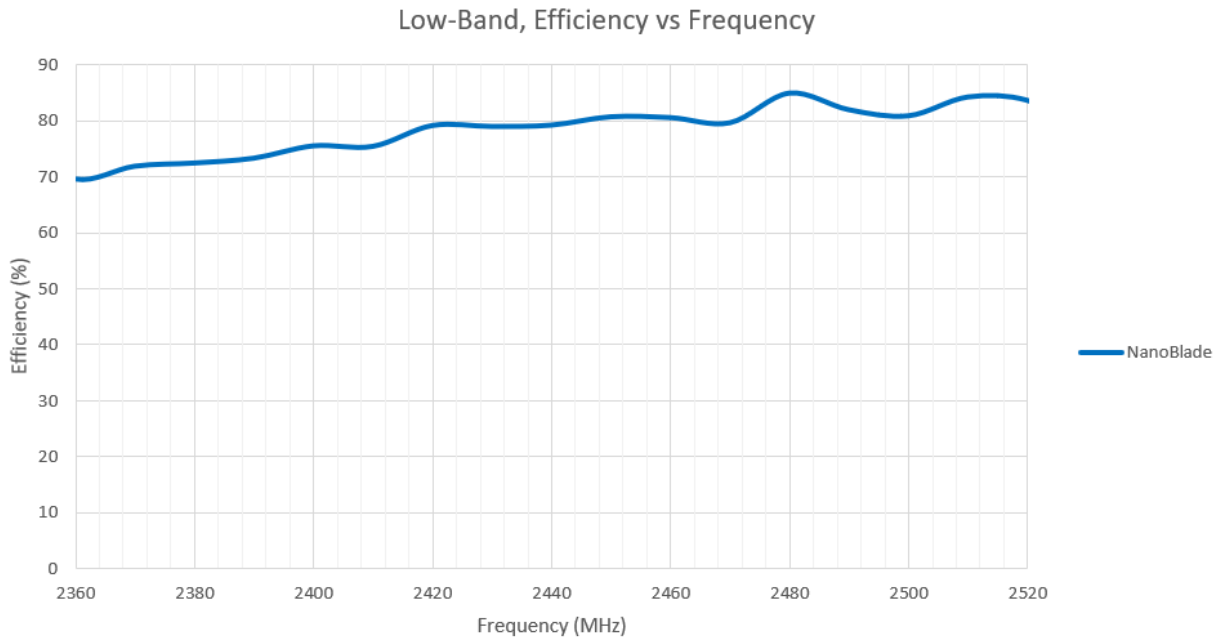


Figure 11: Low-Band antenna efficiency measured in free space with a nominal value of -1.1dB across the operating frequency

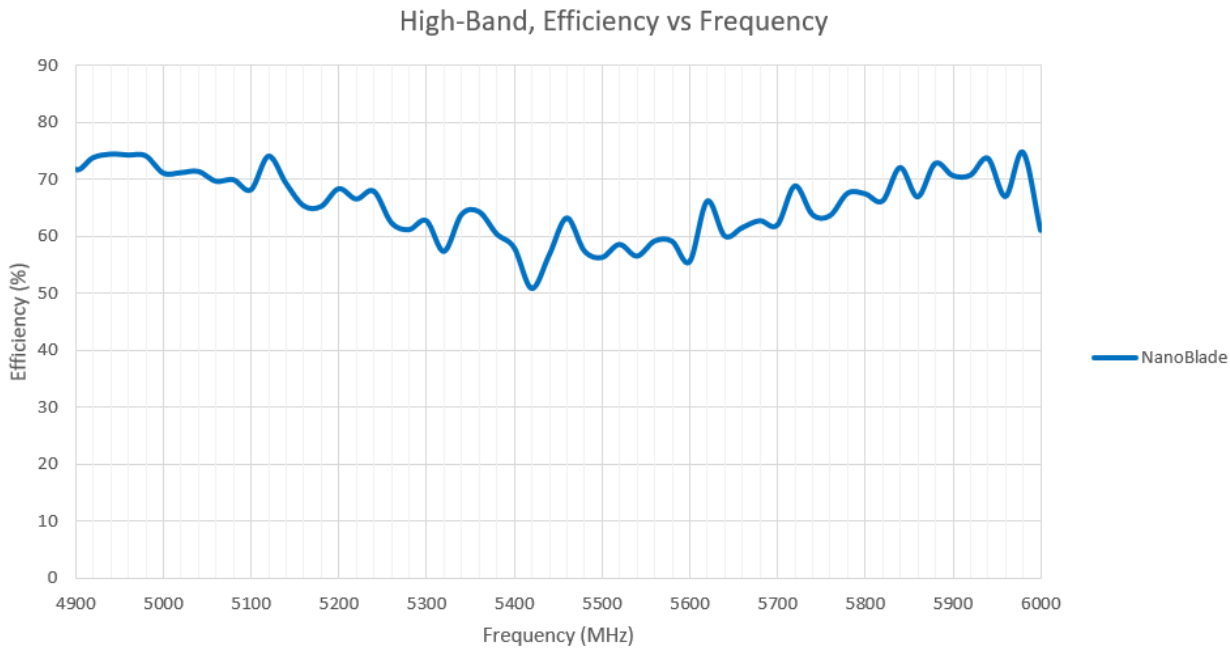


Figure 12: High-Band antenna efficiency measured in free space with a nominal value of -1.91dB across the operating frequency

4.5 ANTENNA GAIN

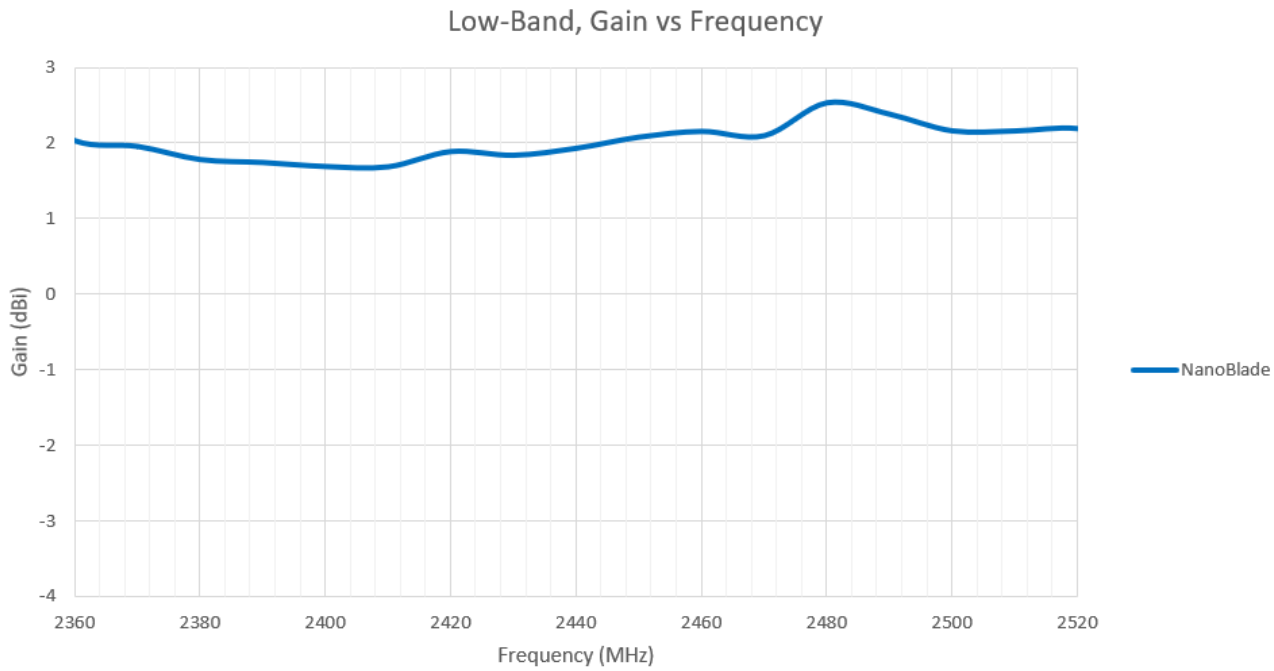


Figure 13: Low-Band Total Gain vs. Frequency, measured in free space


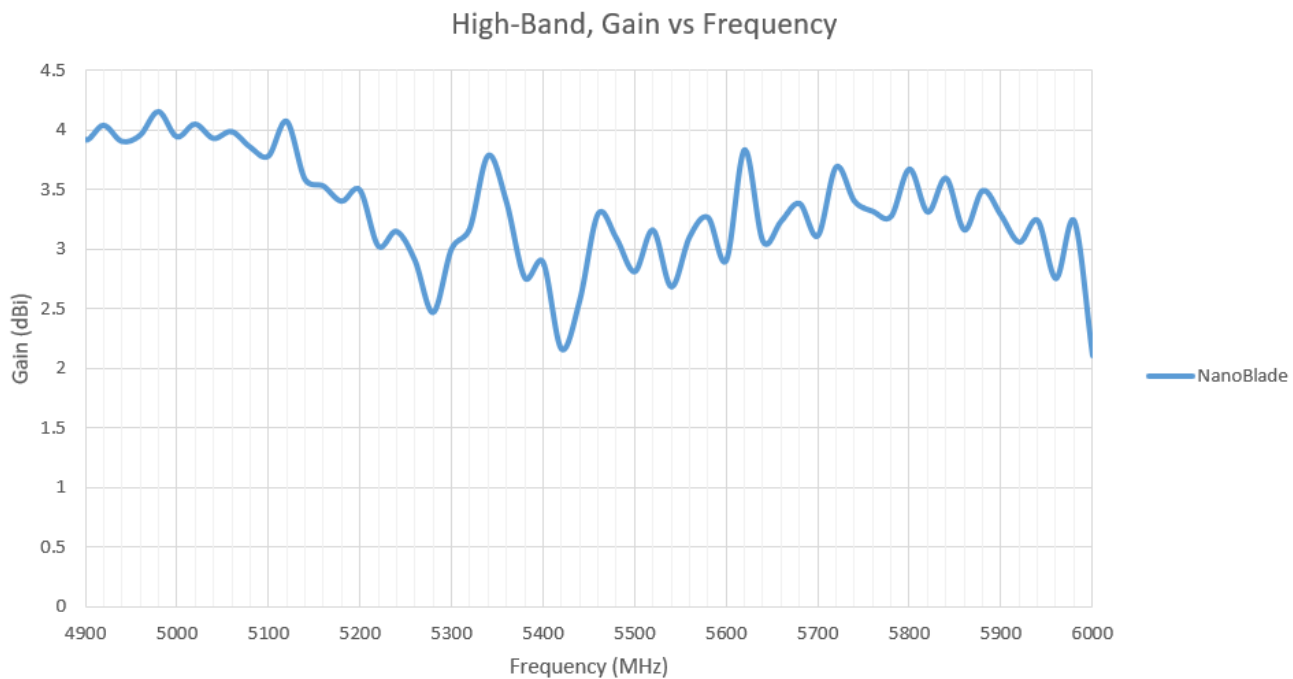


Figure 14: High-Band Total Gain vs. Frequency, measured in free space

5 Recommended Antenna Conductive Material Keep Out Region

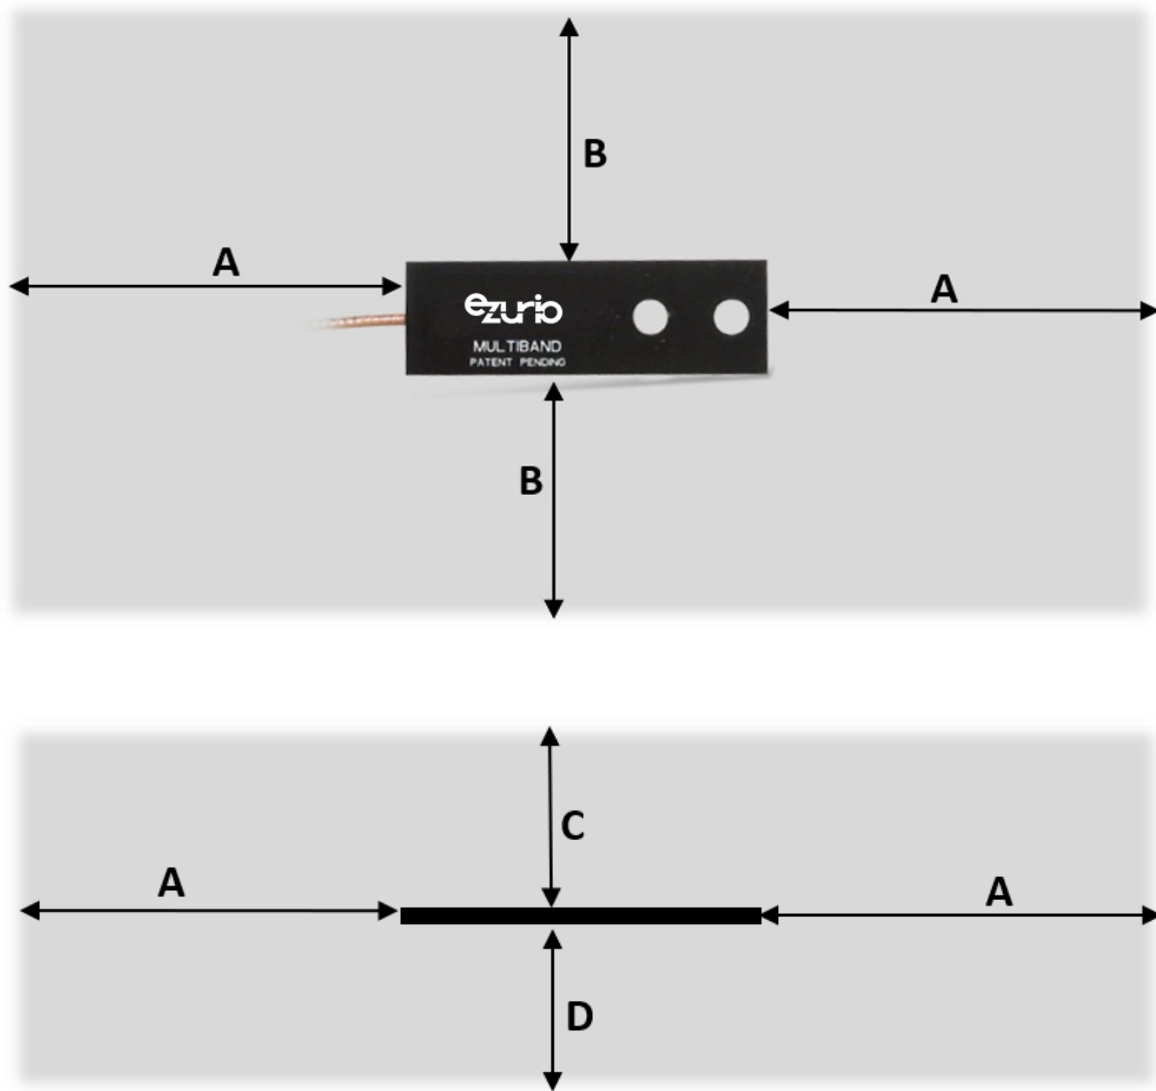

Keep Out Region Distance (mm)			
A	B	C	D
5	5	10	10

Notes:

- Antenna can be mounted on polycarbonate with a nominal thickness of 2.25mm (1.5mm - 3mm), or with plastic screws
- Diagram is not to scale

6 Additional Information

Please contact your local sales representative or our support team for further assistance:

Headquarters	Ezurio 50 S. Main St. Suite 1100 Akron, OH 44308 USA
Website	http://www.ezurio.com
Technical Support	http://www.ezurio.com/resources/support
Sales Contact	http://www.ezurio.com/contact

Note: Information contained in this document is subject to change.

Ezurio's products are subject to standard [Terms & Conditions](#).

<http://www.ezurio.com>

© Copyright 2026 Ezurio. All Rights Reserved. Any information furnished by Ezurio and its agents is believed to be accurate but cannot be guaranteed. All specifications are subject to change without notice. Responsibility for the use and application of Ezurio materials or products rests with the end user since Ezurio and its agents cannot be aware of all potential uses. Ezurio makes no warranties as to non-infringement nor as to the fitness, merchantability, or sustainability of any Ezurio materials or products for any specific or general uses. Ezurio or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Ezurio products are sold pursuant to the Ezurio Terms and Conditions of Sale in effect from time to time, a copy of which will be furnished upon request. Nothing herein provides a license under any Ezurio or any third-party intellectual property right. Ezurio and its associated logos are trademarks owned by Ezurio and/or its affiliates.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View CAF94505 on WIN SOURCE](#)

 [Ezurio Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management