




**THE DATASHEET OF
GSX-NS-88-3.05-30**




Wave Soldering Profile for Standard Parts

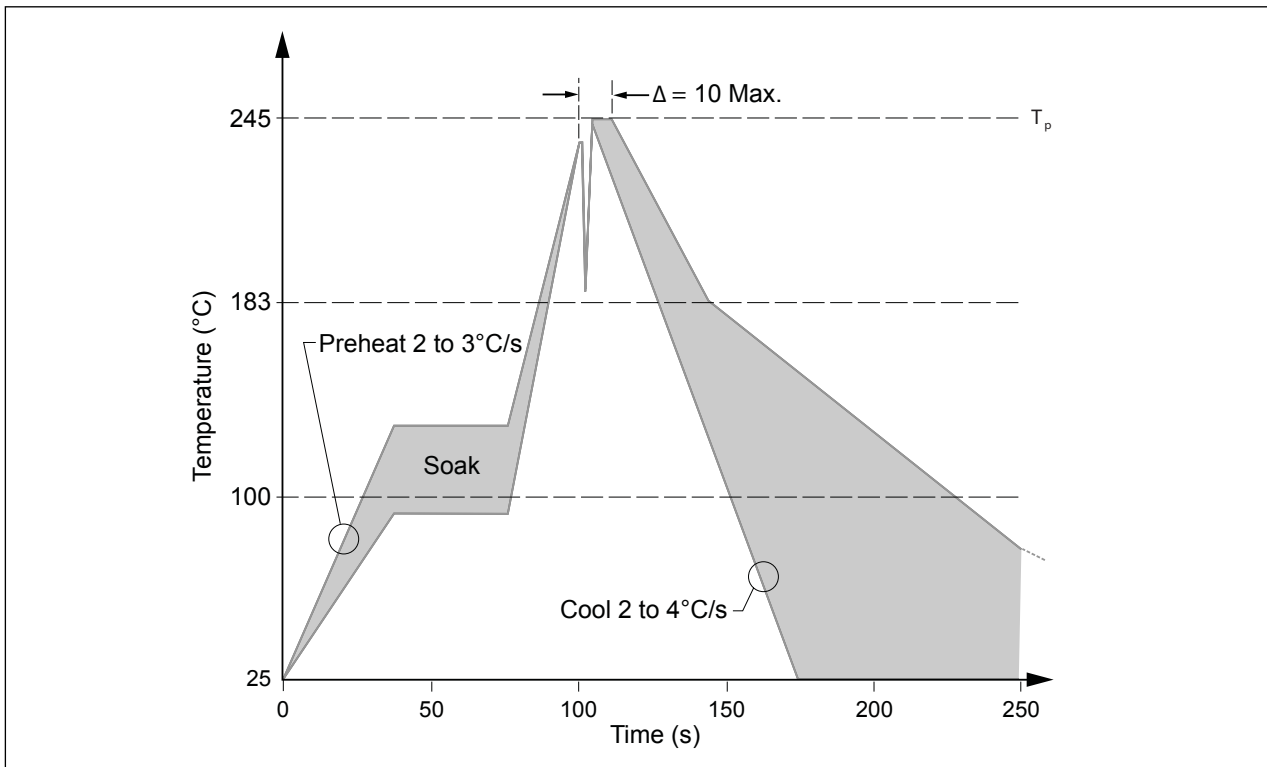

Profile Feature	Parameter
Average ramp-up rate	~ 200°C/second
Heating rate during preheat	typical 2-3°/second
Peak temperature T_p	245°C
Time within +0°C / -5°C of actual peak temperature	10 seconds
Ramp-down rate	4°C/second max.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View GSX-NS-88-3.05-30 on WIN SOURCE](#)

 [Kycon, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management