



THE DATASHEET OF
189-009-513R571



SPECIFICATIONS:


ELECTRICAL:

INSULATION RESISTANCE: 1000 Ω MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC FOR 1 MIN
 CURRENT RATING: 5 AMPS
 OPERATING TEMPERATURE: -55°C TO +105°C



MATERIALS:

CONTACTS: BRASS
 CONTACT PLATING: GOLD PLATED ENTIRE CONTACT
 INSULATOR: UL94V-0 RATED, BLACK PA9T
 260°C PROCESS TEMP.
 SHELL: NICKEL PLATED STEEL

**25 PIN
SHOWN**

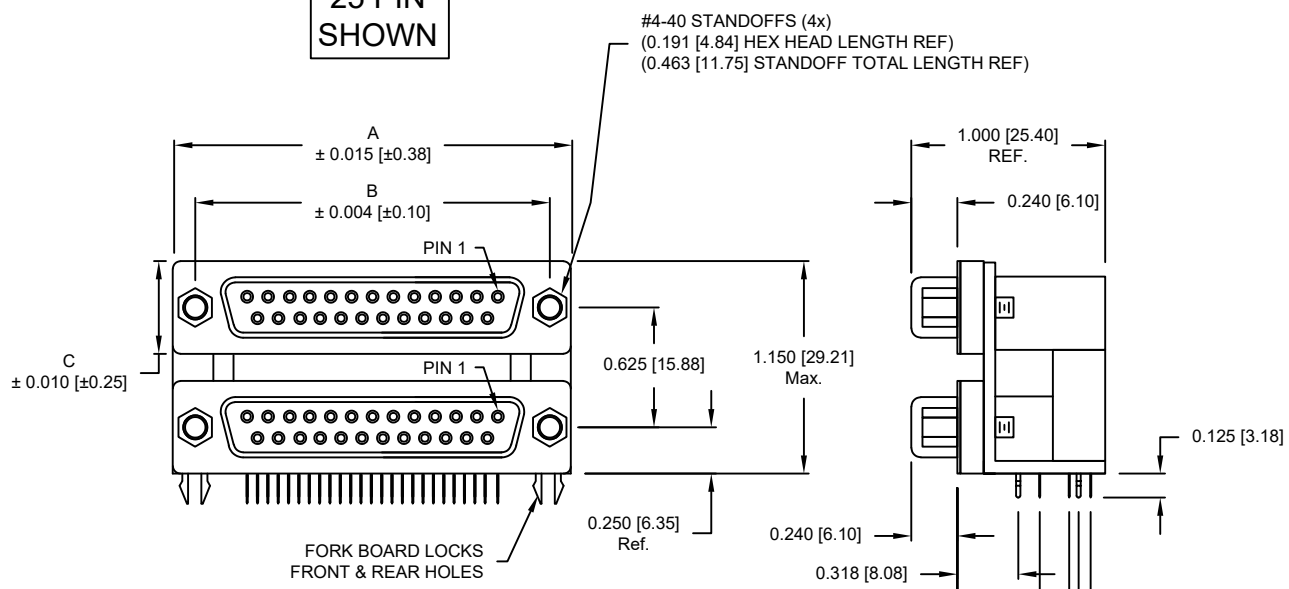

POS	DIMENSIONS			
	9	15	25	37
A	1.204 [30.58]	1.535 [38.99]	2.078 [52.78]	2.724 [69.19]
B	0.984 [24.99]	1.312 [33.32]	1.850 [46.99]	2.500 [63.50]
C	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]	0.494 [12.55]

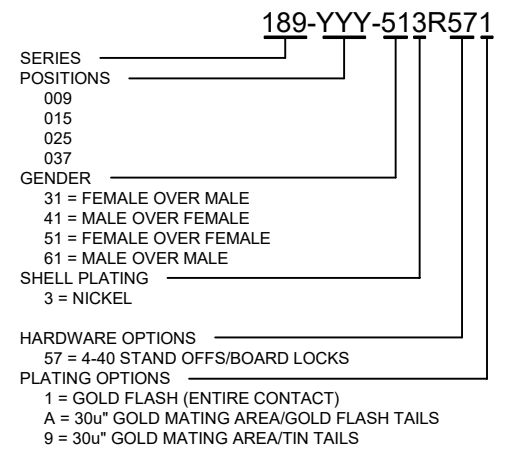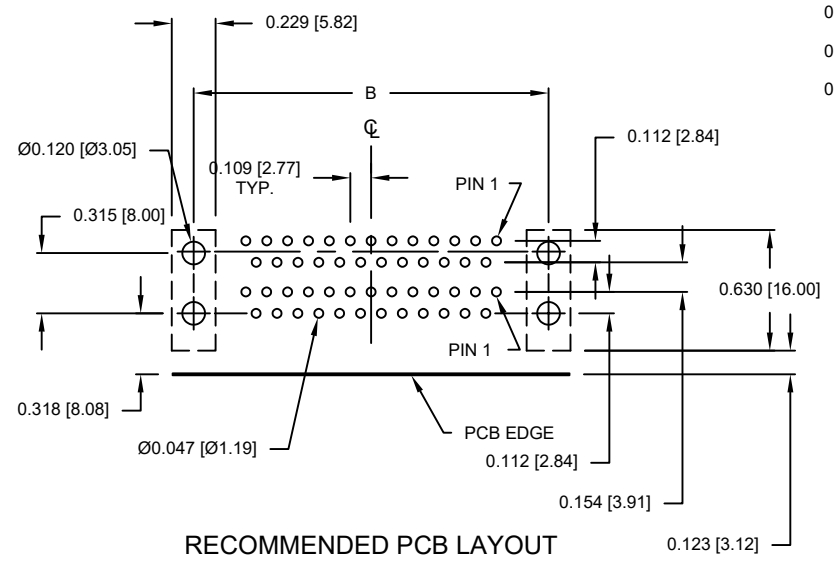

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NC

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH
 DATE: 03/30/2007

NorComp

SCALE: NTS
 SHEET 1 OF 1
 REV 10
 DWG NO. 189-YYY-513R571

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 189-009-513R571 on WIN SOURCE](#)

 [NorComp Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management