



**THE DATASHEET OF
20KPA96CA**



MDE Semiconductor, Inc.


201 Shipyard Way, Unit C, Newport Beach, CA., USA 92663 Tel : 760-564-8656 • Fax : 760-564-2414
1-800-831-4881 Email: sales@mde semiconductor.com Web: www.mde semiconductor.com

20KPA SERIES

GLASS PASSIVATED JUNCTION TRANSIENT VOLTAGE SUPPRESSOR VOLTAGE-20.0 TO 300 Volts 20000 Watt Peak Pulse Power

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction
- 20000W Peak Pulse Power capability on 10/1000 μ s waveform
- Excellent clamping capability
- Repetition rate (duty cycle):0.05%
- Low incremental surge resistance
- Fast response time: typically less than 1.0 ps from 0 volts to BV
- Typical Id less than 1 μ A above 10V
- High temperature soldering guaranteed: 265°C/10 seconds/.375", (9.5mm) lead length, 5lbs., (2.3kg) tension

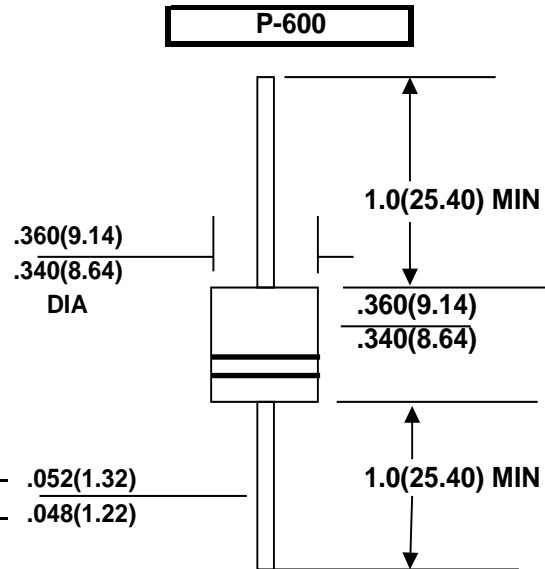

MECHANICAL DATA

Case: Molded plastic over glass passivated junction
 Terminals: Plated Axial leads, solderable per MIL-STD-750, Method 2026
 Polarity: Color band denoted positive end (cathode) except Bipolar
 Mounting Position: Any
 Weight: 0.07 ounce, 2.1 gram

Dimensions in inches (millimeters)

DEVICES FOR BIPOLAR APPLICATIONS

For Bidirectional use C or CA Suffix for types 20KPA20 thru types 20KPA300
 Electrical characteristics apply in both directions.

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| RATING | SYMBOL | VALUE | UNITS |
|---|----------|---------------|-------|
| Peak Pulse Power Dissipation on 10/1000 μ s waveform (NOTE 1) | Pppm | Minimum 20000 | Watts |
| Peak Pulse Current of on 10-1000 μ s waveform (NOTE 1) | Ippm | SEE TABLE 1 | Amps |
| Steady State Power Dissipation at Tl=75 °C Lead Lengths .375", (9.5mm)(NOTE 2) | Pm(AV) | 8.0 | Watts |
| Peak Forward Surge Current, 8.3ms Sine-Wave Superimposed on Rated Load, (JEDEC Method) (NOTE 3) | IFSM | 400.0 | Amps |
| Operating and Storage Temperature Range | Tj, Tstg | -55 to +175 | °C |

NOTES:

1. Non-repetitive current pulse, per Fig.3 and derated above Ta=25 °C per Fig.2.
2. Mounted on Copper Pad area of 0.8x0.8" (20x20mm) per Fig.5.
3. 8.3ms single half sine-wave, or equivalent square wave, Duty cycle=4 pulses per minutes maximum

Certified RoHS Compliant

UL File # E223026

8/11/2020

MDE Semiconductor, Inc.

201 Shipyard Way, Unit C, Newport Beach, CA., USA 92663 Tel : 760-564-8656 • Fax : 760-564-2414
 1-800-831-4881 Email: sales@mdesemiconductor.com Web: www.mdesemiconductor.com

20KPA Series Rating and Characteristics



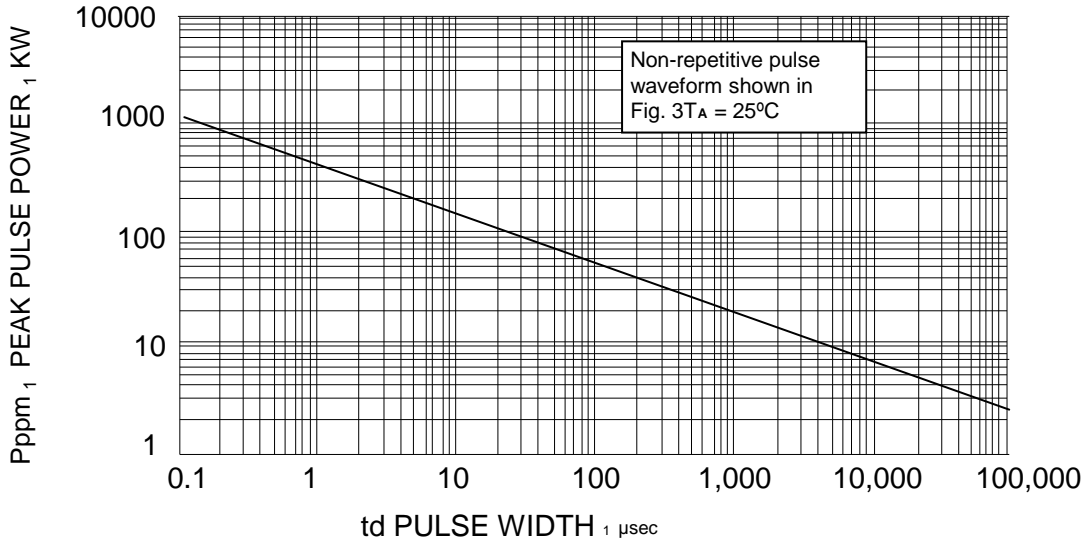


FIG. 1 PEAK PULSE POWER RATING

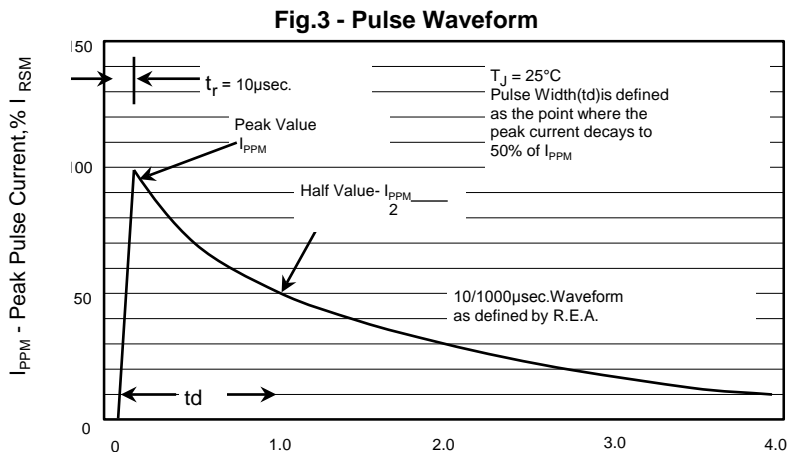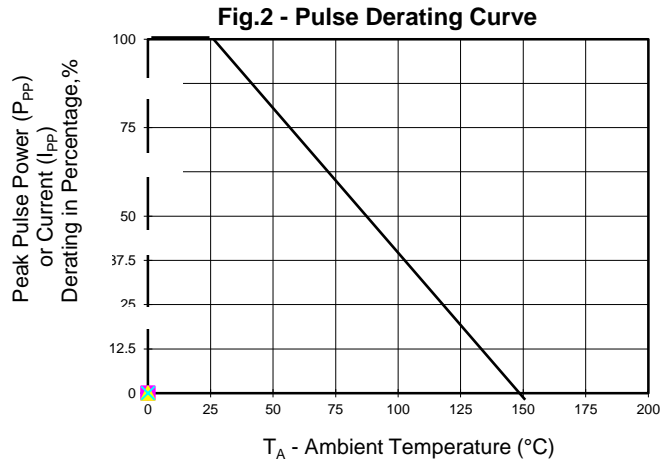

MDE Semiconductor, Inc.

201 Shipyard Way, Unit C, Newport Beach, CA., USA 92663 Tel : 760-564-8656 • Fax : 760-564-2414
1-800-831-4881 Email: sales@mdesemiconductor.com Web: www.mdesemiconductor.com

20000 Watt TVS

| UNI-POLAR | BI-POLAR | REVERSE STANDOFF VOLTAGE V_{RWM} (V) | BREAKDOWN VOLTAGE V_{BR} (V) MIN. @ I_T | TEST CURRENT (I_T) mA | MAXIMUM CLAMPING VOLTAGE @ I_{PP} V_c (V) | PEAK PULSE CURRENT I_{PP} (A) | REVERSE LEAKAGE @ V_{RWM} I_R (μ A) |
|-----------|------------|---|--|---------------------------------|--|--|---|
| 20KPA20A | 20KPA20CA | 20.00 | 22.34 | 50 | 36.8 | 548.9 | 5000 |
| 20KPA24A | 20KPA24CA | 24.00 | 26.81 | 50 | 41.2 | 490.3 | 5000 |
| 20KPA26A | 20KPA26CA | 26.00 | 29.04 | 50 | 44.7 | 451.9 | 2000 |
| 20KPA28A | 20KPA28CA | 28.00 | 31.28 | 50 | 48.0 | 420.8 | 1000 |
| 20KPA30A | 20KPA30CA | 30.00 | 33.51 | 5 | 51.5 | 392.2 | 250 |
| 20KPA32A | 20KPA32CA | 32.00 | 35.74 | 5 | 54.3 | 372.0 | 150 |
| 20KPA34A | 20KPA34CA | 34.00 | 38.00 | 5 | 57.5 | 351.3 | 50 |
| 20KPA36A | 20KPA36CA | 36.00 | 40.20 | 5 | 61.5 | 328.5 | 20 |
| 20KPA40A | 20KPA40CA | 40.00 | 44.70 | 5 | 67.8 | 297.9 | 15 |
| 20KPA44A | 20KPA44CA | 44.00 | 49.10 | 5 | 72.7 | 277.9 | 10 |
| 20KPA48A | 20KPA48CA | 48.00 | 53.60 | 5 | 79.4 | 254.4 | 10 |
| 20KPA52A | 20KPA52CA | 52.00 | 58.10 | 5 | 85.8 | 235.4 | 10 |
| 20KPA56A | 20KPA56CA | 56.00 | 62.60 | 5 | 92.6 | 218.1 | 10 |
| 20KPA60A | 20KPA60CA | 60.00 | 67.00 | 5 | 97.6 | 207.0 | 10 |
| 20KPA64A | 20KPA64CA | 64.00 | 71.50 | 5 | 104.0 | 194.2 | 10 |
| 20KPA68A | 20KPA68CA | 68.00 | 76.00 | 5 | 110.0 | 183.6 | 10 |
| 20KPA72A | 20KPA72CA | 72.00 | 80.40 | 5 | 116.0 | 174.1 | 10 |
| 20KPA80A | 20KPA80CA | 80.00 | 89.40 | 5 | 130.0 | 155.4 | 10 |
| 20KPA88A | 20KPA88CA | 88.00 | 98.30 | 5 | 142.0 | 142.3 | 10 |
| 20KPA96A | 20KPA96CA | 96.00 | 107.20 | 5 | 155.0 | 130.3 | 10 |
| 20KPA104A | 20KPA104CA | 104.00 | 116.20 | 5 | 168.0 | 120.2 | 10 |
| 20KPA112A | 20KPA112CA | 112.00 | 125.10 | 5 | 182.0 | 111.0 | 10 |
| 20KPA120A | 20KPA120CA | 120.00 | 134.00 | 5 | 194.0 | 104.1 | 10 |
| 20KPA132A | 20KPA132CA | 132.00 | 147.40 | 5 | 213.0 | 94.8 | 10 |
| 20KPA144A | 20KPA144CA | 144.00 | 160.80 | 5 | 232.0 | 87.1 | 10 |
| 20KPA160A | 20KPA160CA | 160.00 | 178.70 | 5 | 258.0 | 78.3 | 10 |
| 20KPA172A | 20KPA172CA | 172.00 | 192.10 | 5 | 277.0 | 72.9 | 10 |
| 20KPA180A | 20KPA180CA | 180.00 | 201.10 | 5 | 291.0 | 69.4 | 10 |
| 20KPA192A | 20KPA192CA | 192.00 | 214.50 | 5 | 309.0 | 65.4 | 10 |
| 20KPA204A | 20KPA204CA | 204.00 | 227.90 | 5 | 329.0 | 61.4 | 10 |
| 20KPA216A | 20KPA216CA | 216.00 | 241.30 | 5 | 348.0 | 58.0 | 10 |
| 20KPA232A | 20KPA232CA | 232.00 | 259.10 | 5 | 374.0 | 54.0 | 10 |
| 20KPA240A | 20KPA240CA | 240.00 | 268.10 | 5 | 387.0 | 52.2 | 10 |
| 20KPA256A | 20KPA256CA | 256.00 | 286.00 | 5 | 412.0 | 49.0 | 10 |
| 20KPA280A | 20KPA280CA | 280.00 | 312.80 | 5 | 451.0 | 44.6 | 10 |
| 20KPA300A | 20KPA300CA | 300.00 | 335.10 | 5 | 483.0 | 41.8 | 10 |

For bidirectional type having V_{RWM} of 40 volts and less, the I_R limit is double.

For parts without A , the V_{BR} is $\pm 10\%$

**Certified RoHS Compliant
UL File # E223026**

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View 20KPA96CA on WIN SOURCE](#)
- ⊖ [MDE Semiconductor, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management