





**THE DATASHEET OF  
K22X-E9S-NJ**



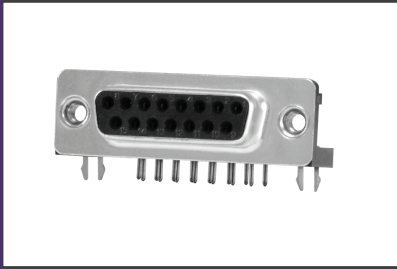

**D-SUBMINIATURE CONNECTORS:**  
**K22X Series**  
 Right Angle PCB Mount 0.318" Footprint

**K22X Series Dimensions**  
 Dimensions in mm

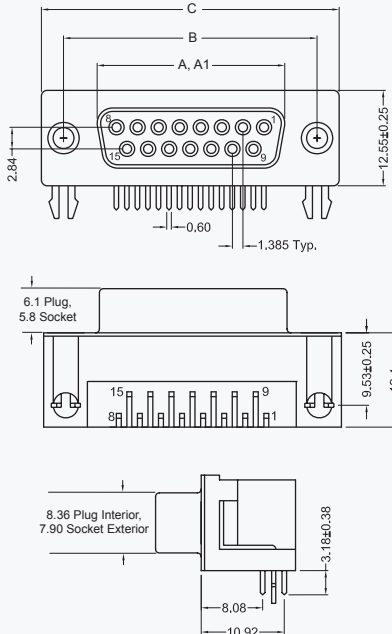

Shell Size	In mm			
	A	A1	B	C
	±.010 ±0.25	±.010 ±0.25	±.005 ±0.13	±.015 ±0.38
9 (E)	.643 16.33	.666 16.92	.984 24.99	1.213 30.81
15 (A)	.971 24.66	.994 25.25	1.312 33.32	1.541 39.14
25 (B)	1.511 38.38	1.534 38.96	1.852 47.04	2.088 53.04
37 (C)	2.159 54.84	2.182 55.42	2.500 63.50	2.729 69.32

A = Exterior of Female Shell (S)  
 A1 = Interior of Male Shell (P)

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

Series - Shell Size Contact - Contact Type - Mounting Option - Plating Option

**Series**

**K22X** - D-Subminiature Connector, Right Angle

**Shell Size-Contact Option**

- E - 9 Contacts
- A - 15 Contacts
- B - 25 Contacts
- C - 37 Contacts

**Contact Type**

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

**Mounting Option**

- N - With Boardlocks and #4-40 UNC Threaded Inserts
- NJ - With Boardlocks and # 4-40 Jackscrews Installed

**Plating Option**

- Blank - Gold Flash
- 30 - 30µ" Gold

Contact Kycon for Other Options

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View K22X-E9S-NJ on WIN SOURCE](#)

 [Kycon, Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management