

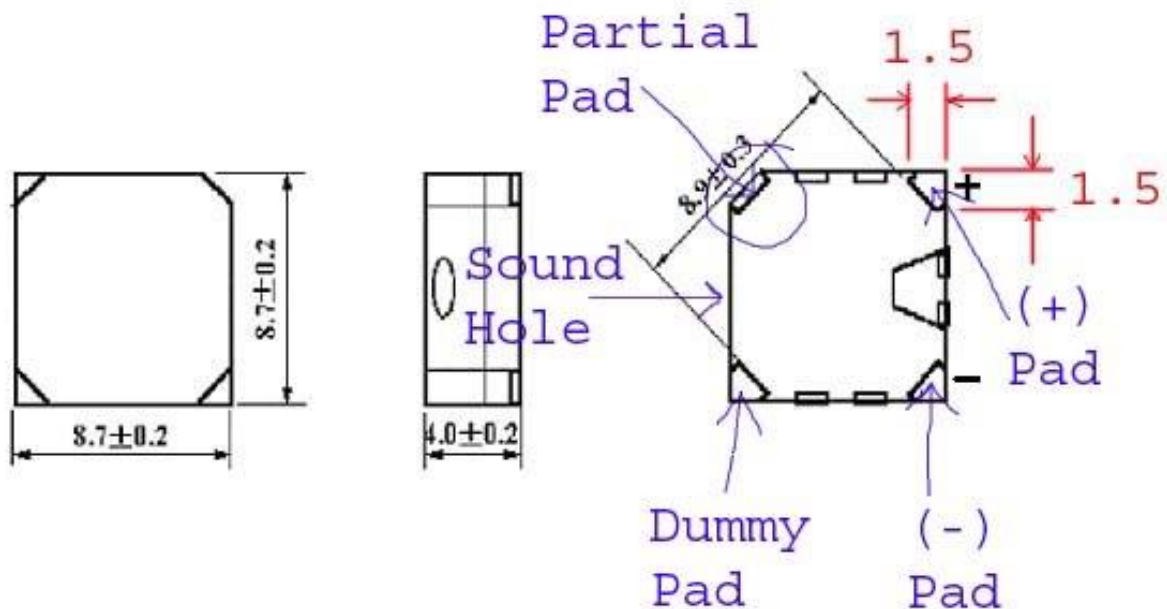
**May not be suitable for all medical and aerospace applications.
Specifications: Contact Mallory Sonalert to discuss your application.**

NO CIRCUITRY

Oscillation Frequency (Hz)	2731
Operating Voltage (Vp-p/max)	2.0 ~ 4.0
Rated Voltage (Vp-p)	3.0
Current Consumption Max. (mA)	80 at Rated Voltage
Sound Pressure Level Min. (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance (Ω)	15 ± 2
Operating Temperature ($^{\circ}\text{C}$)	$-20 \sim +85$
Storage Temperature ($^{\circ}\text{C}$)	$-30 \sim +90$
Housing	LCP plastic resin (Color : Black)
Type of Connection	SMD
Condition by reflow soldering ($^{\circ}\text{C}$)	250 ± 5 / within 5 sec
Condition by hand soldering ($^{\circ}\text{C}$)	350 ± 20 / within 5 sec
Weight (g)	0.4
Options	For other options contact factory

Dimensions: (units: mm)

PS: Vp-p = 1/2duty, square wave

RoHS Compliant

* Dummy pad and Partial Pad are connected internally and are intended to only be used to help secure the part to the circuit board.

Packaging:

Parts are supplied in tubes of 35 pieces.

Units come with wash label and are appropriate for aqueous wash.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AST200Q on WIN SOURCE](#)
- ⊖ [Mallory Sonalert Products Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management