





# THE DATASHEET OF LC-6.0

| PART DESCRIPTION |      |                | REV.                                   |                          |
|------------------|------|----------------|----------------------------------------|--------------------------|
| ITEM             | Q'TY | PART NUMBER    | PART DESCRIPTION                       |                          |
| 1                | 1    | FLP-LC         | HOLDER CAP, FLEXIBLE LIGHT-PIPE        |                          |
| 2                | 1    | FLPS1022-X.XXX | LIGHT PIPE CABLE, CUT LENGTH IN INCHES |                          |
|                  |      |                | H                                      | FLP Length Update        |
|                  |      |                | J                                      | FLP Length Clarification |
|                  |      |                | K                                      | Corrected "L" Dimension  |
|                  |      |                | M                                      | Updated Fiber In Box     |
|                  |      |                | N                                      | Added Note 2             |

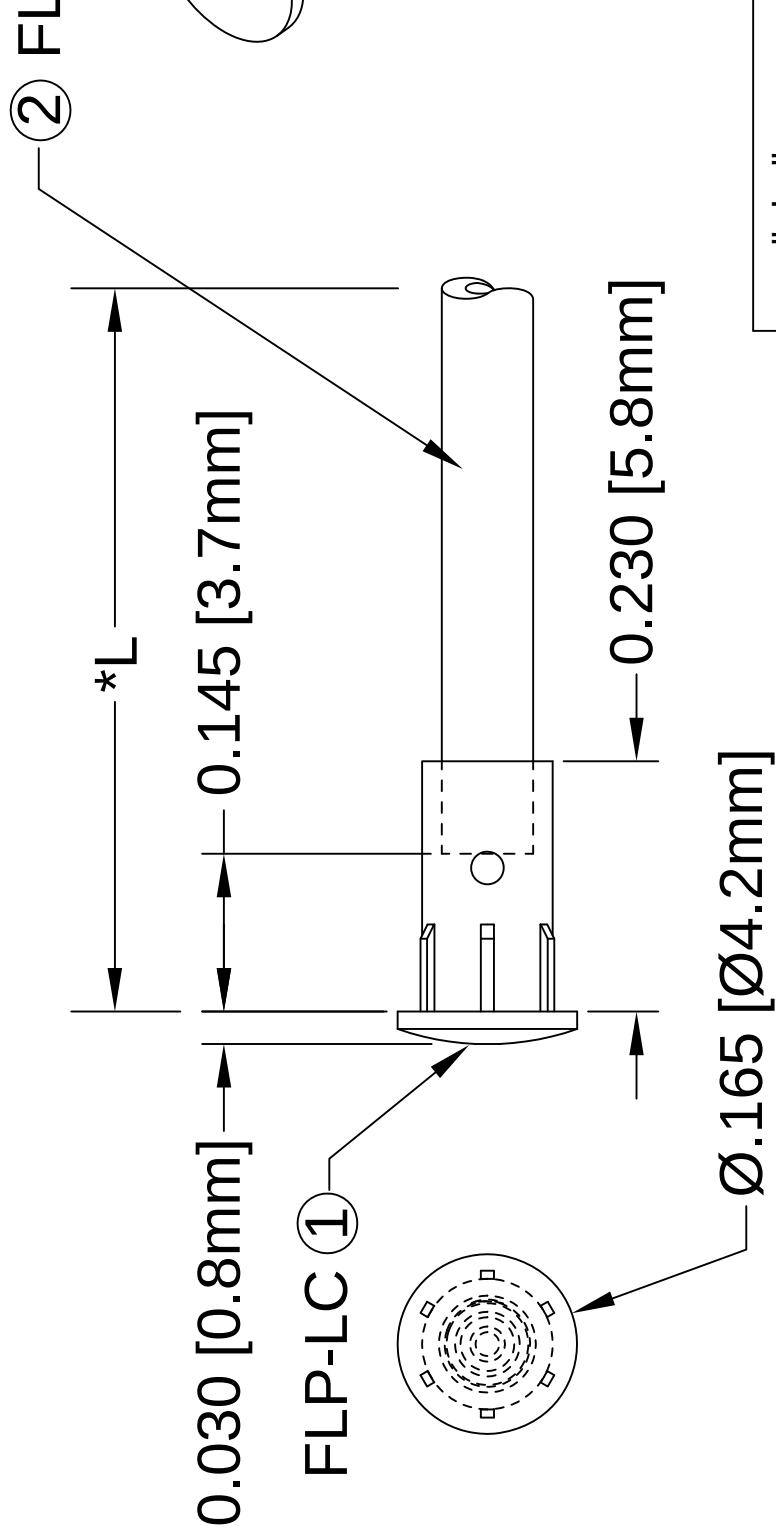

| " L "              |
|--------------------|
| 0.750" ~ 16.000"   |
| 16.100" ~ 40.000"  |
| 40.100" ~ 80.000"  |
| 80.100" ~ 3,940.0' |

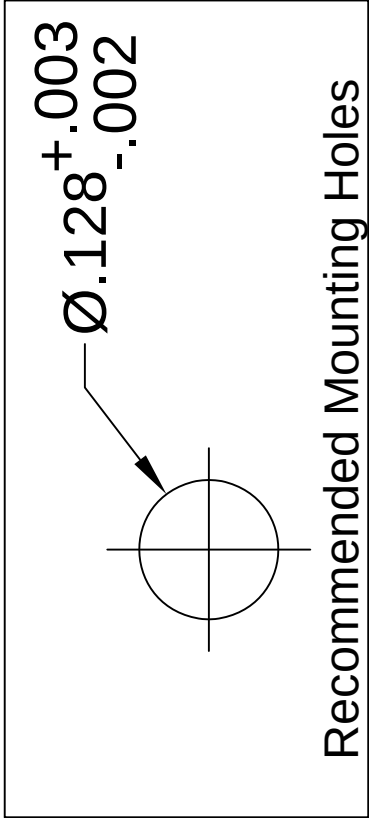

|                                                     |           |         |         |
|-----------------------------------------------------|-----------|---------|---------|
| STANDARD TOLERANCES<br>(UNLESS OTHERWISE SPECIFIED) |           | ANGULAR | X°      |
| DECIMALS                                            | .X        | ± .1    |         |
|                                                     | .XX       | ± .02   |         |
|                                                     | .XXX      | ± .010  |         |
| DESIGNED:                                           | S. Irving | DATE:   | 05/2/05 |
| CHECKED:                                            | M. Chen   | DATE:   | 05/2/05 |

- NOTE:
1. ALLOWABLE CUT LENGTH IS UP TO 3 DECIMAL PLACES.
  2. MINIMUM BEND RADIUS OF FLEXIBLE LIGHT PIPE: 0.87" [22mm].

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LC-6.0](#) on WIN SOURCE

 [Bivar Inc.](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management