





**THE DATASHEET OF
KF22X-C37P-NJ**

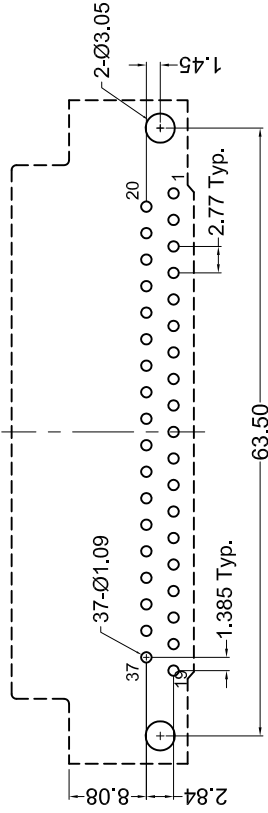

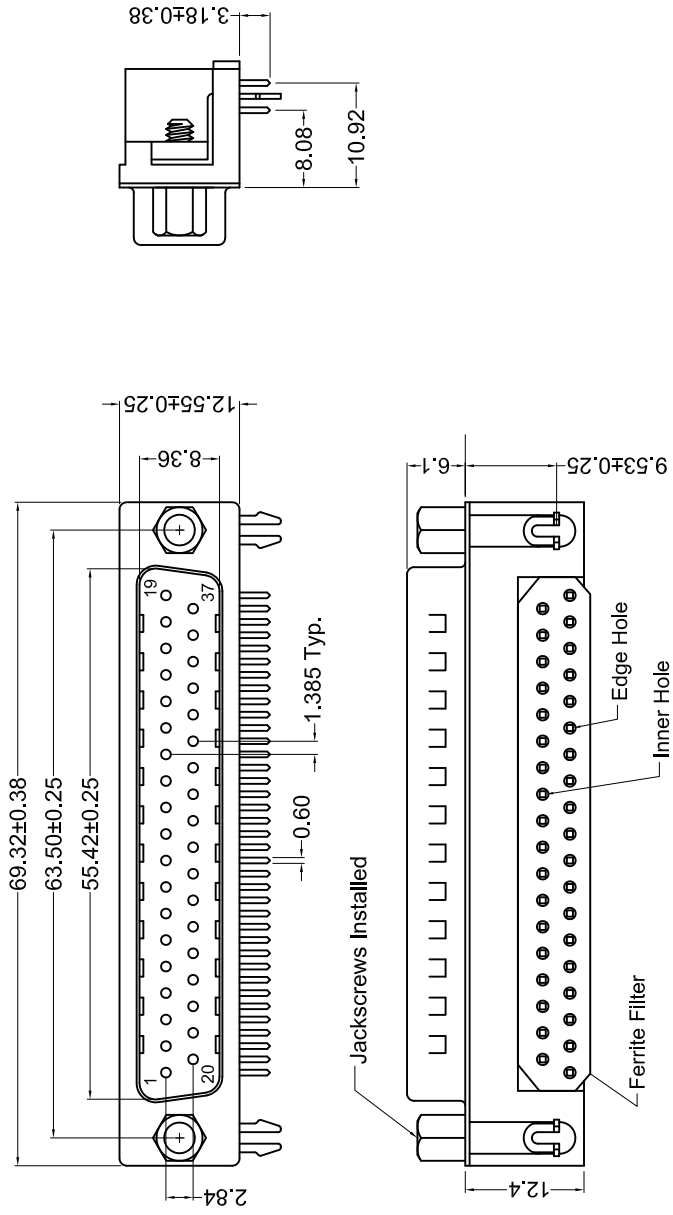

Recommended PCB Layout
(Top View)

Ferrite Specifications	
Test Frequency	Inner Hole
30 Mhz	22-30 Ohms
50 Mhz	29-37 Ohms
100 Mhz	35-40 Ohms

Part Number	Contact Area Plating Finish
KF22X-C37P-NJ	Gold Flash (Standard)
KF22X-C37P-NJ15	15u" Gold (15 Option)
KF22X-C37P-NJ30	30u" Gold (30 Option)

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	01/06/06	New Drawing	R. Aguirre	H. MA	R. Aguirre	01/05/06
A2	02/21/08	ECO #07-049	S. Vien	H. MA		
A3	11/05/13	ECO #12-018	S. Vien	P. DalCanto		
A4	12/31/17	ECO #17-027	J. Elbanna	C. Furumasa		

	UNITS
	mm

KF22X-C37P-NJ

Right Angle, Ferrite D-Sub, RoHS
37 Position, Male, 0.318"



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View KF22X-C37P-NJ on WIN SOURCE](#)

 [Kycon, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management