



**THE DATASHEET OF**  
**288T232R161A2**




# Series 288

## Commercial Miniature 16mm Size

### Rotary Encoder

- Robust Construction
- 2-bit Incremental or 4-bit Absolute Encoder
- Optional Momentary Switch
- Available with 16 Detents
- Continuous Rotation
- Bushing Mount
- Solder Lug or PCB Terminals
- RoHS Compliant

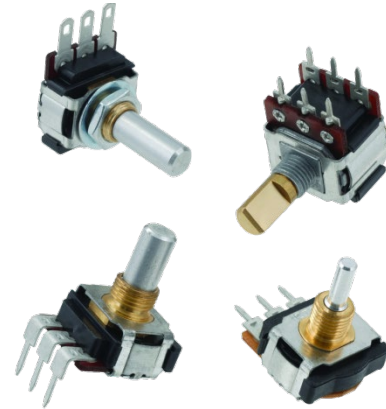

### Description

The 288 Series robust construction provides the user with flexible options of incremental and absolute outputs. A long life, highly reliable precision product provides users comfortable and robust feelings. As a standard, the 288 series comes with solder lug terminals, PC and PC formed to rear. Options include various shaft and bushing lengths, shaft styles, encoder codes, detents and switches to meet your design requirements.

### Ordering Information

Series	Terminal Styles	Bushing Length "A"	Shaft Length "L"	Shaft Trim	Combination Resolution	Encoder Code	Rotational Angle	Detent																																																					
288	T	2	A	R	16	2	A	1																																																					
<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>*T</td> <td>Solder lug</td> </tr> <tr> <td>X</td> <td>PC</td> </tr> <tr> <td>**V</td> <td>PC formed to rear</td> </tr> </tbody> </table>		Code	Spec.	*T	Solder lug	X	PC	**V	PC formed to rear	<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>A0</td> <td>10mm, 6.0mm Dia.</td> </tr> <tr> <td>A5</td> <td>15mm, 6.0mm Dia.</td> </tr> <tr> <td>B0</td> <td>20mm, 6.0mm Dia.</td> </tr> <tr> <td>B5</td> <td>25mm, 6.0mm Dia.</td> </tr> <tr> <td>C0</td> <td>30mm, 6.0mm Dia.</td> </tr> <tr> <td>20</td> <td>.625", .250" Dia.</td> </tr> <tr> <td>24</td> <td>.750", .250" Dia.</td> </tr> <tr> <td>28</td> <td>.875", .250" Dia.</td> </tr> <tr> <td>32</td> <td>1.000", .250" Dia.</td> </tr> </tbody> </table>		Code	Spec.	A0	10mm, 6.0mm Dia.	A5	15mm, 6.0mm Dia.	B0	20mm, 6.0mm Dia.	B5	25mm, 6.0mm Dia.	C0	30mm, 6.0mm Dia.	20	.625", .250" Dia.	24	.750", .250" Dia.	28	.875", .250" Dia.	32	1.000", .250" Dia.	<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>16</td> <td>16 COM (4 PULSES- 2 bit)</td> </tr> <tr> <td></td> <td>16 COM (1 PULSE- 4 bit)</td> </tr> <tr> <td>24</td> <td>24 COM (6 PULSES)</td> </tr> <tr> <td>32</td> <td>32 COM (8 PULSES)</td> </tr> </tbody> </table>		Code	Spec.	16	16 COM (4 PULSES- 2 bit)		16 COM (1 PULSE- 4 bit)	24	24 COM (6 PULSES)	32	32 COM (8 PULSES)	<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2 bit Binary</td> </tr> <tr> <td>*2</td> <td>4 bit Gray</td> </tr> <tr> <td colspan="2">*16 Combination only</td> </tr> </tbody> </table>		Code	Spec.	1	2 bit Binary	*2	4 bit Gray	*16 Combination only		<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>None</td> </tr> <tr> <td>2</td> <td>16 Detents</td> </tr> </tbody> </table>		Code	Spec.	1	None	2	16 Detents
Code	Spec.																																																												
*T	Solder lug																																																												
X	PC																																																												
**V	PC formed to rear																																																												
Code	Spec.																																																												
A0	10mm, 6.0mm Dia.																																																												
A5	15mm, 6.0mm Dia.																																																												
B0	20mm, 6.0mm Dia.																																																												
B5	25mm, 6.0mm Dia.																																																												
C0	30mm, 6.0mm Dia.																																																												
20	.625", .250" Dia.																																																												
24	.750", .250" Dia.																																																												
28	.875", .250" Dia.																																																												
32	1.000", .250" Dia.																																																												
Code	Spec.																																																												
16	16 COM (4 PULSES- 2 bit)																																																												
	16 COM (1 PULSE- 4 bit)																																																												
24	24 COM (6 PULSES)																																																												
32	32 COM (8 PULSES)																																																												
Code	Spec.																																																												
1	2 bit Binary																																																												
*2	4 bit Gray																																																												
*16 Combination only																																																													
Code	Spec.																																																												
1	None																																																												
2	16 Detents																																																												
<table border="1"> <thead> <tr> <th>Code</th> <th>Bushing Length</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>.250" (3/8"-32UNEF)</td> </tr> <tr> <td>3</td> <td>.375" (3/8"-32UNEF)</td> </tr> <tr> <td>4</td> <td>.500" (3/8"-32UNEF)</td> </tr> <tr> <td>A</td> <td>5.0mm(M8x.75P)</td> </tr> <tr> <td>B</td> <td>6.35mm(M8x.75P)</td> </tr> <tr> <td>D</td> <td>9.53mm(M8x.75P)</td> </tr> </tbody> </table>		Code	Bushing Length	2	.250" (3/8"-32UNEF)	3	.375" (3/8"-32UNEF)	4	.500" (3/8"-32UNEF)	A	5.0mm(M8x.75P)	B	6.35mm(M8x.75P)	D	9.53mm(M8x.75P)	<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>R</td> <td>Round</td> </tr> <tr> <td>F</td> <td>Flatted</td> </tr> <tr> <td>K</td> <td>Knurled &amp; Slotted</td> </tr> <tr> <td>S</td> <td>Slotted</td> </tr> </tbody> </table>		Code	Spec.	R	Round	F	Flatted	K	Knurled & Slotted	S	Slotted	<table border="1"> <thead> <tr> <th>Code</th> <th>Spec.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>None</td> </tr> <tr> <td>*B</td> <td>Momentary switch</td> </tr> <tr> <td colspan="2">*2 Bit models only</td> </tr> </tbody> </table>		Code	Spec.	A	None	*B	Momentary switch	*2 Bit models only																									
Code	Bushing Length																																																												
2	.250" (3/8"-32UNEF)																																																												
3	.375" (3/8"-32UNEF)																																																												
4	.500" (3/8"-32UNEF)																																																												
A	5.0mm(M8x.75P)																																																												
B	6.35mm(M8x.75P)																																																												
D	9.53mm(M8x.75P)																																																												
Code	Spec.																																																												
R	Round																																																												
F	Flatted																																																												
K	Knurled & Slotted																																																												
S	Slotted																																																												
Code	Spec.																																																												
A	None																																																												
*B	Momentary switch																																																												
*2 Bit models only																																																													

## Electrical Specifications

Parameter	Conditions & Remarks	Min	Max	Unit
Operating Temperature Range		-25	+100	°C

### Encoder Function

Contact Resistance			500	ohms
Detent Points		0	16	detents
Rotational Life			50,000	cycles
Resolution	2 bit: 4,6,8 pulses 4 bit: 16 combinations		360 360	degrees degrees
Insulation Resistance	50 VDC	10		Megohms
Rotational Torque	No Detent With Detent	36 100	216 500	gf.cm gf.cm
Push-Pull Strength of Shaft	10 seconds	8		kg

## Mechanical and Environmental

Reflow Soldering	Maximum temperature of 260°C for 5 seconds
Vibration	15G, 10 to 2000 Hz
Shock	50G
RoHS	Lead-Free. Fully compliant to RoHS Directive
Packaging :	Standard tray packaging
Storage Temperature:	-30°C to +100°C

### Optional Momentary Switch Function:

Contact Resistance	Initial After life cycles	100 200	mΩ
Switch Rating	16 VDC	20	mA
Switch Bounce		5	milliseconds
Switch Operating Force		350-150 12.3-5.3	g oz.
Switch Life		15,000	operations
Switch Travel		.020 0.5	inch mm

## Truth Table

### 2 BIT BINARY CODE

DENOTES CONTACT CLOSURE TO COMMON	2 BIT BINARY CODE															
	B	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1
A	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0
POS. NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

0	1	1
1	1	0
30	31	32

### 4 BIT GRAY CODE

POS. NO.	DENOTES CONTACT CLOSURE TO COMMON							
	A	B	E	F				
1	0	0	0	0				
2	0	0	0	1				
3	0	0	1	1				
4	0	0	1	0				
5	1	0	1	0				
6	1	0	1	1				
7	1	1	1	1				
8	1	1	1	0				
9	0	1	1	0				
10	0	1	1	1				
11	0	1	0	1				
12	0	1	0	0				
13	1	1	0	0				
14	1	1	0	1				
15	1	0	0	1				
16	1	0	0	0				

Mechanical Specifications

Figure 1 – 288X – Typical 2-bit Encoder parallel to P.C. Board

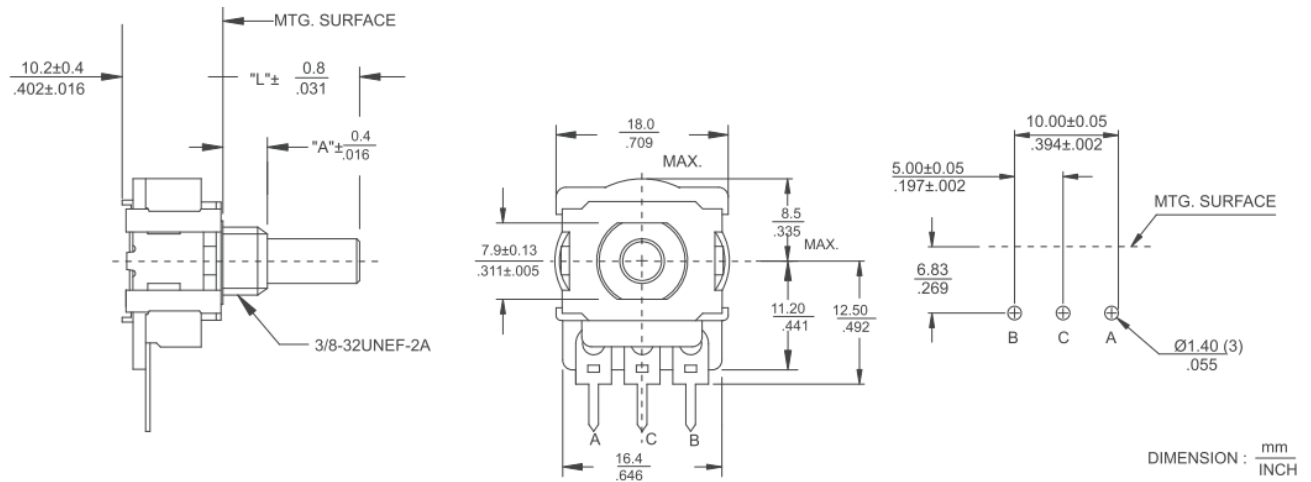


Figure 2 – 2-288X – Typical 4-bit Encoder parallel to P.C. Board

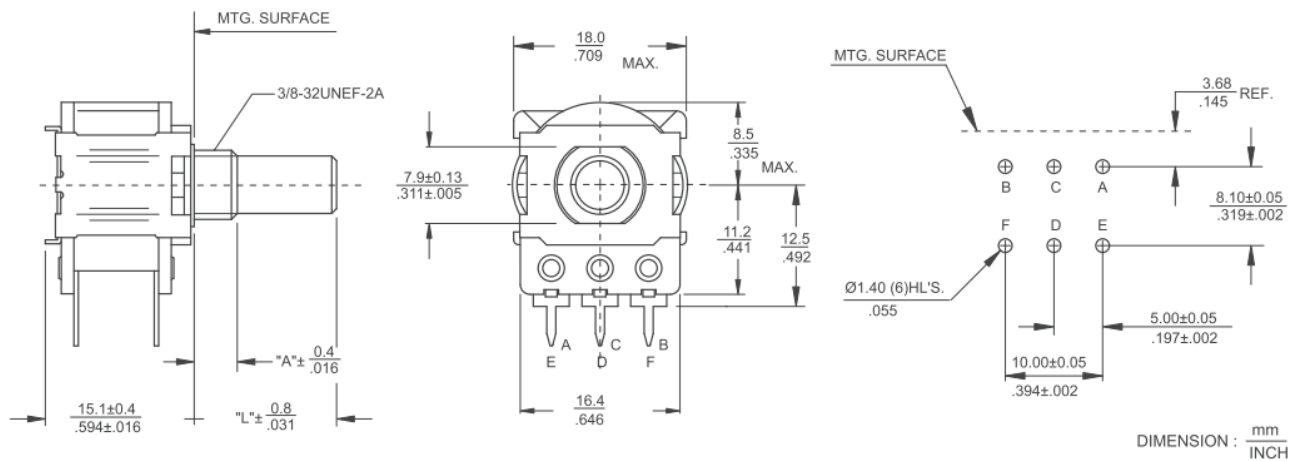


Figure 3 – 288T – Typical 2-bit Encoder With Solder Lug Terminals

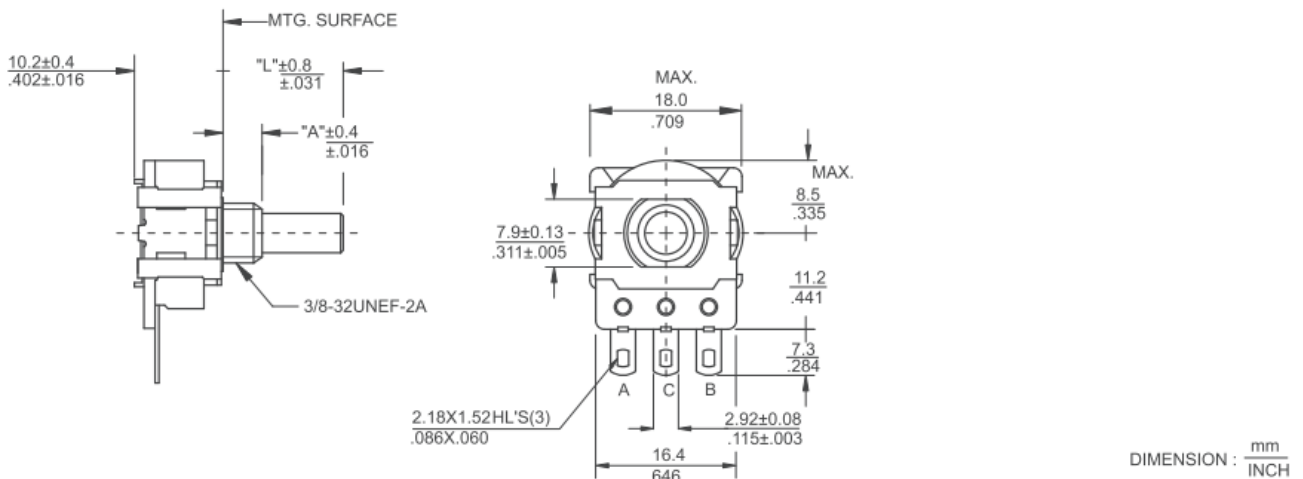


Figure 4 – 288V – Typical 2-bit Perpendicular to P.C. Board

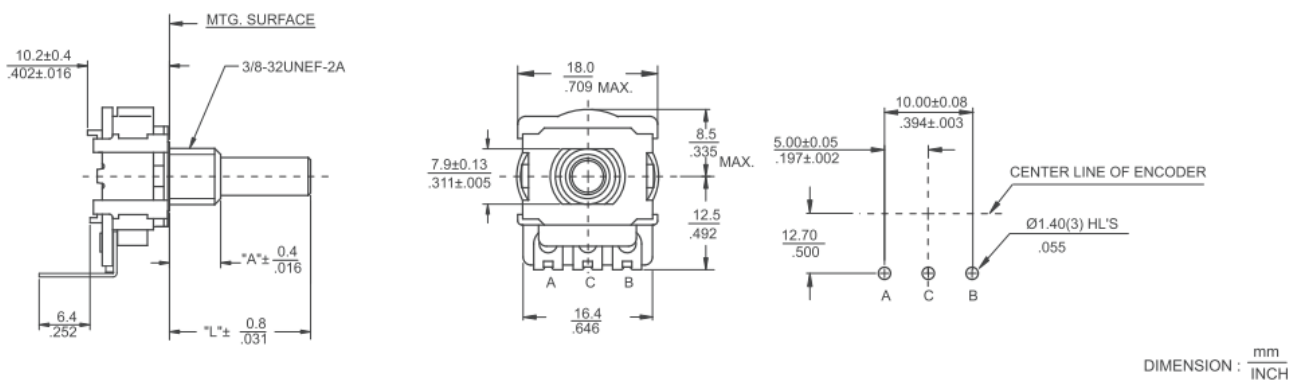


Figure 5 – MC-288V – Typical 2-bit Encoder With Momentary Switch Perpendicular to P.C. Board


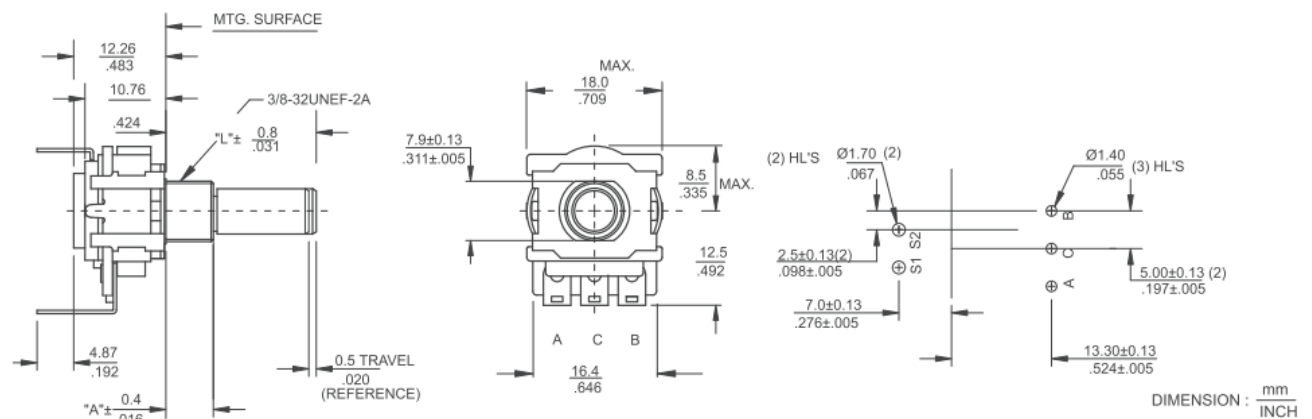


Figure 6 – MC-288X – Typical 2-bit Encoder With Momentary Switch Perpendicular to P.C. Board

**MC-288X** Typical 2-bit Encoder With Momentary Switch Parallel to P.C. Board



**Shaft Trim**

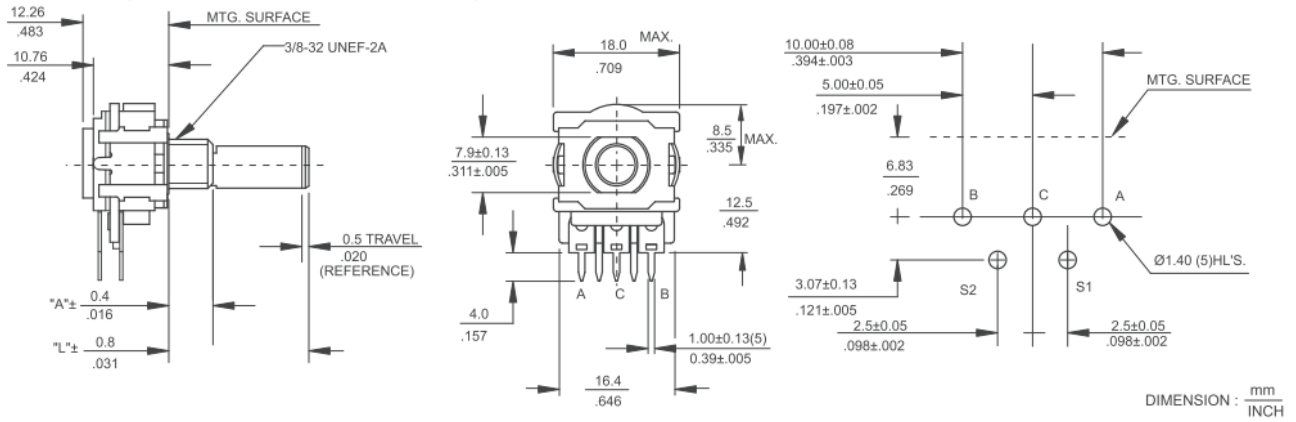

**R - ROUND**

	X
Imperial Shaft	.250"
Metric Shaft	6.00

**F - FLATTED**

	X	Y	Z
Imperial Shaft	.250"	.156"	.375"
Metric Shaft	6.00	4.50	7.00

**K - KNURLED & SLOTTED**

	W	X	Y	Z
Imperial Shaft	.236"	.062"	.344"	24 TEETH
Metric Shaft	6.00	1.57	7.0	18 TEETH

**S - SLOTTED**

	X	Y	Z
Imperial Shaft	.250"	.046"	.062"
Metric Shaft	6.00	1.17	1.57

DIMENSION:  $\frac{\text{inch}}{\text{mm}}$

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View 288T232R161A2 on WIN SOURCE](#)
- ⊖ [CTS Electrocomponents Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management