



TAOGLAS®



Datasheet

DSGP.1575.18.4.A.02

Description:

GPS L1 / GALILEO E1 1575.42MHz 18*18*4mm Ceramic Patch SMD Antenna

Features:

- 4.20 dBi Peak Gain for GPS/GALILEO Band
- Dimensions: 18 x 18 x 4mm
- SMD Direct Mount Ceramic Patch Antenna
- TS16949 Approved
- RoHS & Reach Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	6
4. Radiation Patterns	8
5. Mechanical Drawing	10
6. Antenna Integration Guide	11
7. Evaluation Board Mechanical Drawing	16
8. PCB Footprint Recommendation	17
9. Recommended Solder Reflow Profile	19
10. Packaging	20
Changelog	22

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The DSGP.1575.18.4.A.02 is a ceramic GPS L1 / GALILEO E1 passive patch antenna, 18mm square, with a low profile of 4mm thickness. It is designed for applications in space constrained navigation devices, vehicle tracking/fleet management systems, as well as telematics devices.

The antenna has been tuned on a 50 x 50 mm ground plane, working at 1575.42MHz with a 4.20 dBi gain. The ceramic patch is mounted via SMT process, ideal for high volume low cost assembly. It is manufactured and tested in a TS16949 first tier automotive approved facility.

For further optimization to customer specific device environments where ground-plane size is different, custom tuned patch antennas can be supplied. For more details please contact your regional Taoglas sales office.


2. Specifications

GNSS Frequency Bands Covered							
GPS/QZSS	L1 1575.42MHz	L2 1227.6MHz	L5 1176.45MHz	L6 1278.75MHz			
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
GLONASS	L5R 1176.45MHz	L3PT 1201.5MHz	L2PT 1246MHz	L1CR 1575.42MHz	L1PT 1602MHz		
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
Galileo	E5a 1176.45MHz	E5b 1201.5MHz	E4 1215MHz	E3 1256MHz	E6 1278.75MHz	E2 1561MHz	L1 1575.42MHz
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
BeiDou	B1 1561MHz	B2 1207.14MHz	B3 1268.52MHz				
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
Compass	E5B(B2)/ E6(B3) 1268.56MHz	E2(B1) 1561MHz					
	<input type="checkbox"/>	<input type="checkbox"/>					
SBAS	Omnistar 1542.5MHz	WAAS/EGN OS 1575.42MHz					
	<input type="checkbox"/>	<input checked="" type="checkbox"/>					


Electrical	
Frequency (MHz)	1575.42
VSWR (max.)	2.0:1
Passive Antenna Efficiency (%)	83.33
Passive Antenna Gain at Zenith (dBi)	4.20
Return Loss (dB)	<-10
Impedance	50Ω
Mechanical	
Dimension	18 x 18 x 4mm
Weight	5.8g
Environmental	
Operation Temperature	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH
Moisture Sensitivity Level (MSL)	3 (168 Hours)

3. Antenna Characteristics


3.1 Return Loss

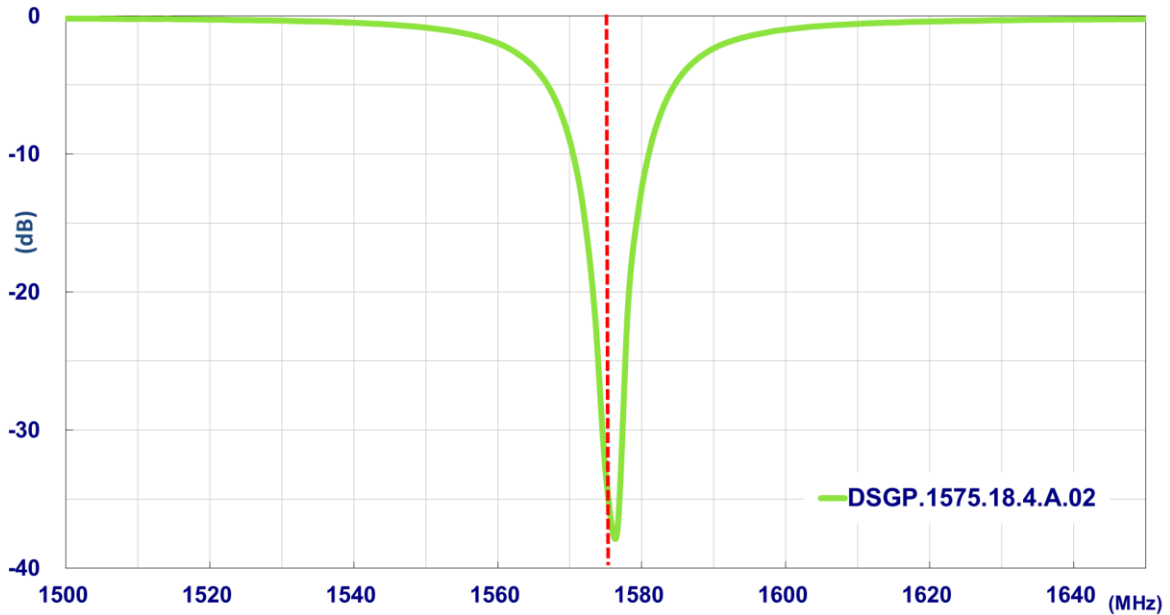


3.2 Efficiency

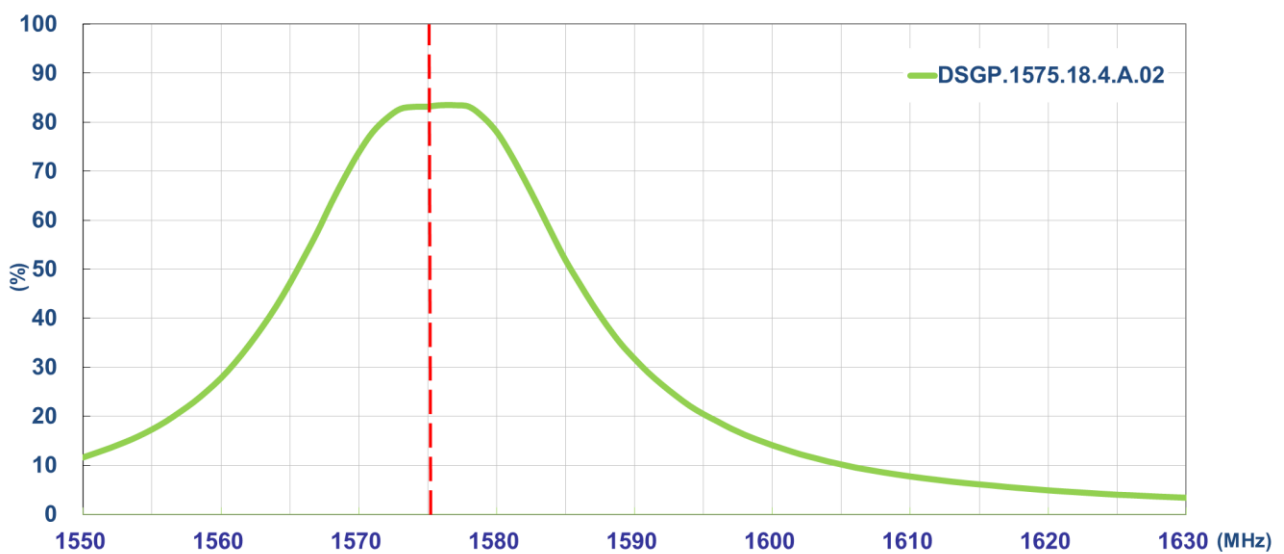

3.3 Average Gain

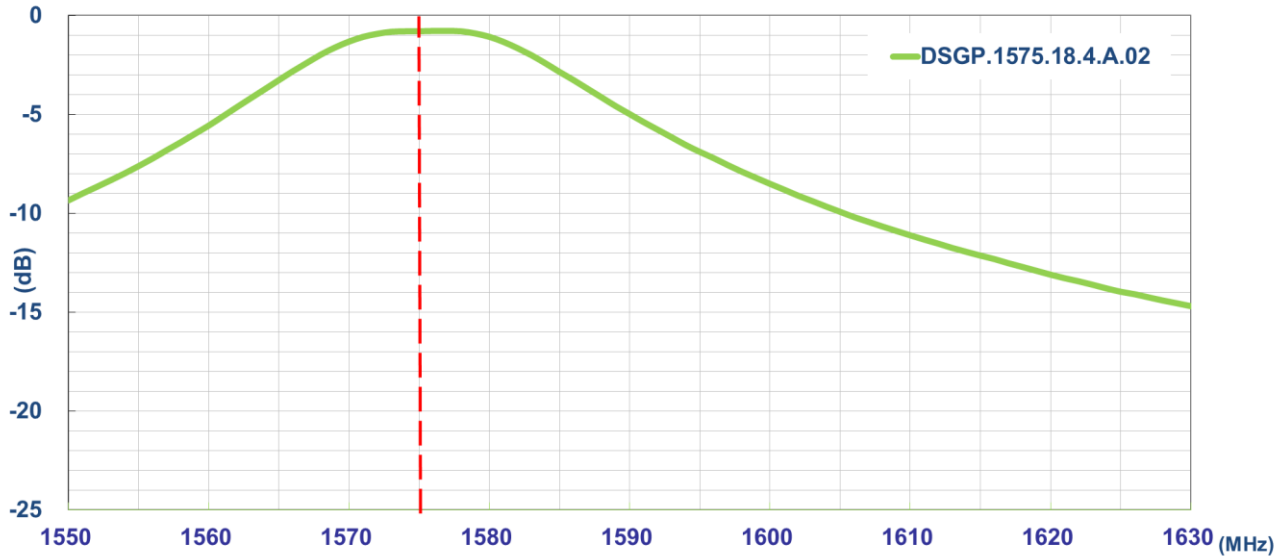


3.4 Peak Gain

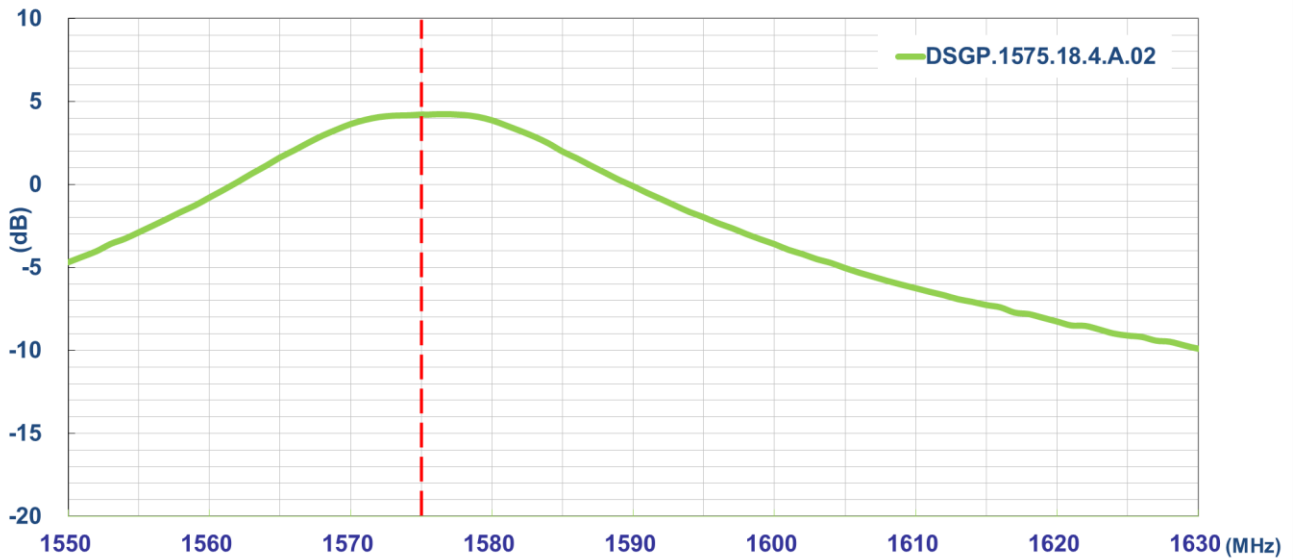

4. Radiation Patterns


4.1 Test Setup

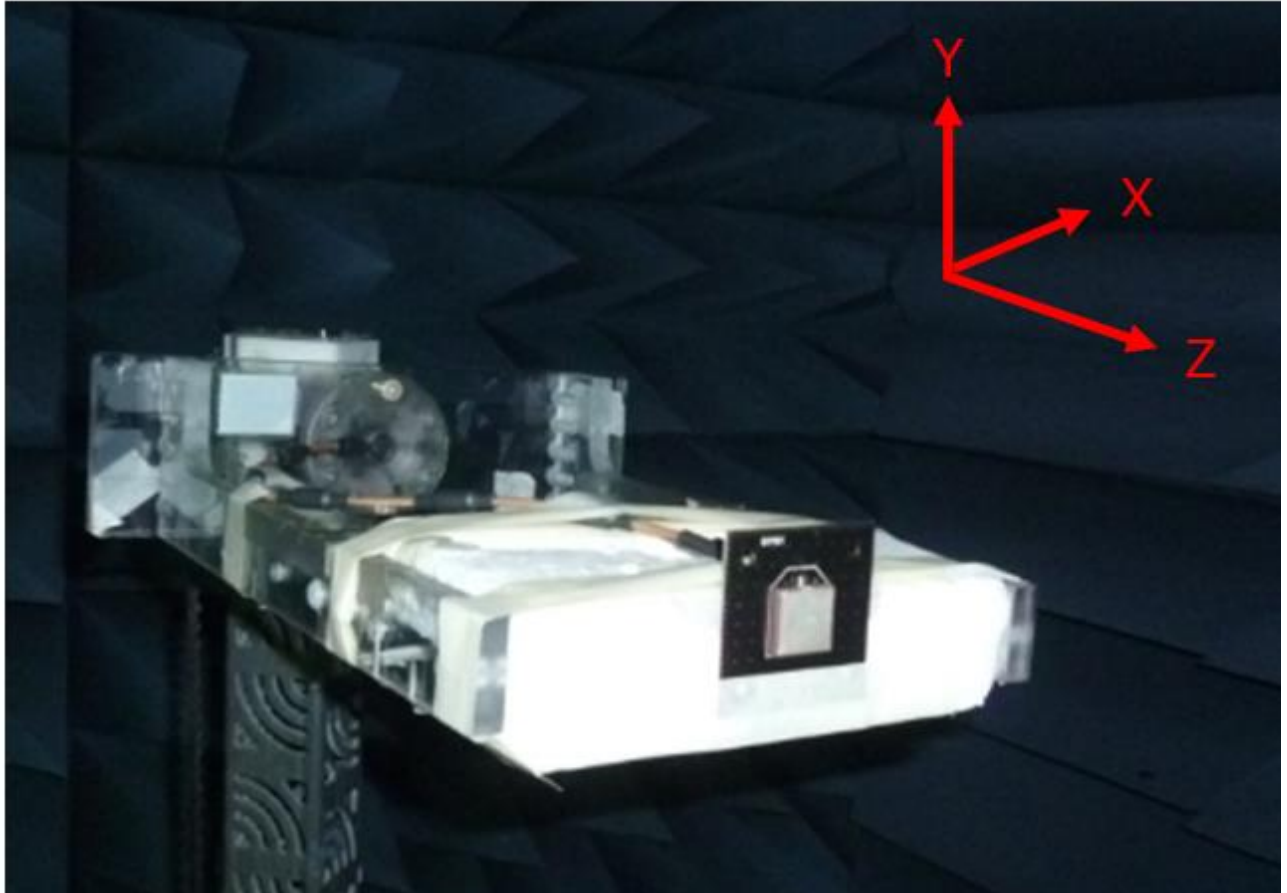


On Evaluation Board

Taoglas Part number: DSGPD.18A


4.2 1575.42MHz 3D and 2D Radiation Patterns

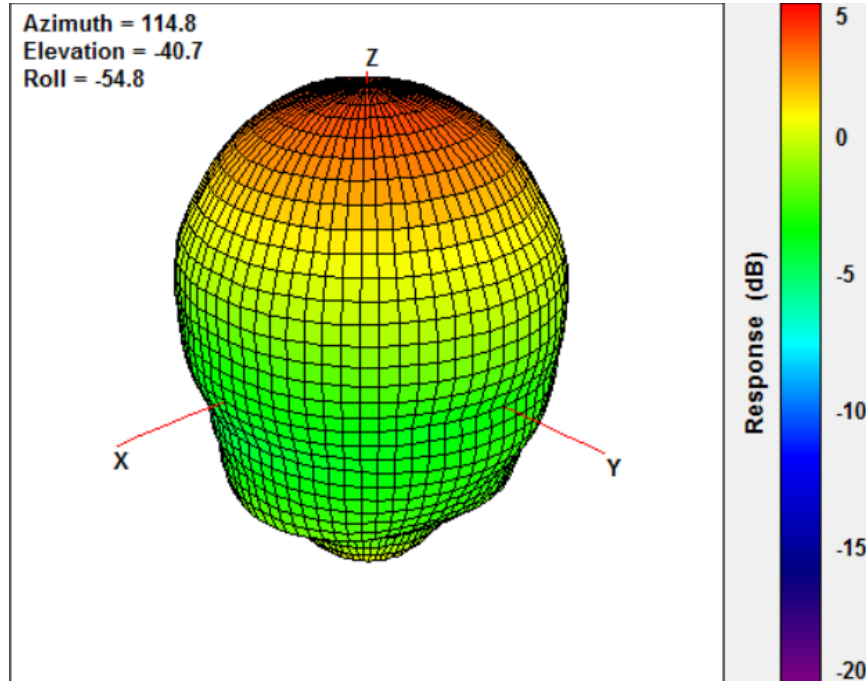


XY Plane

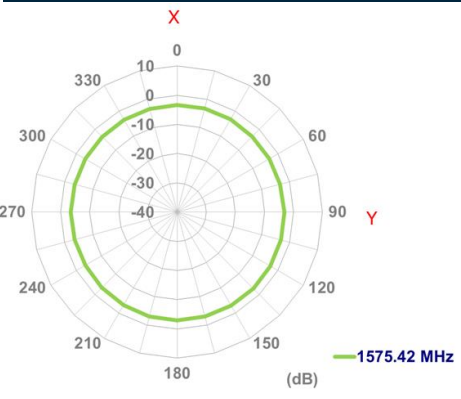


XZ Plane

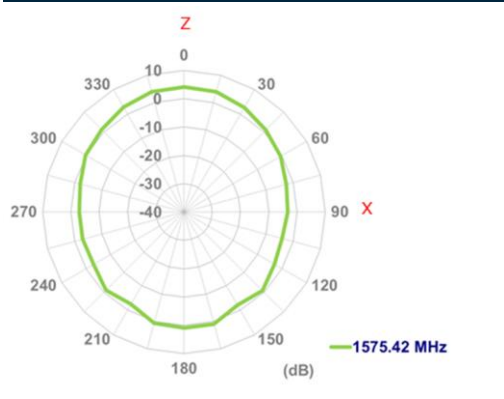


YZ Plane

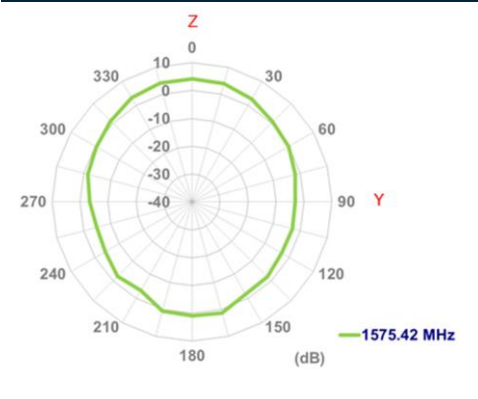


5. Mechanical Drawing (Units: mm)

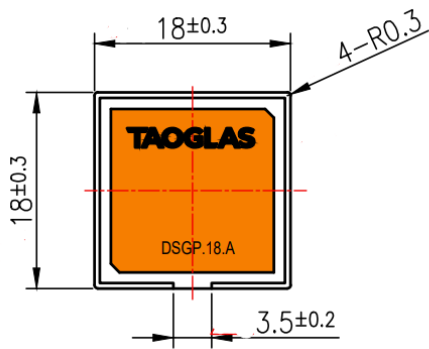

Top View




Side View



Bottom View

6. Antenna Integration Guide

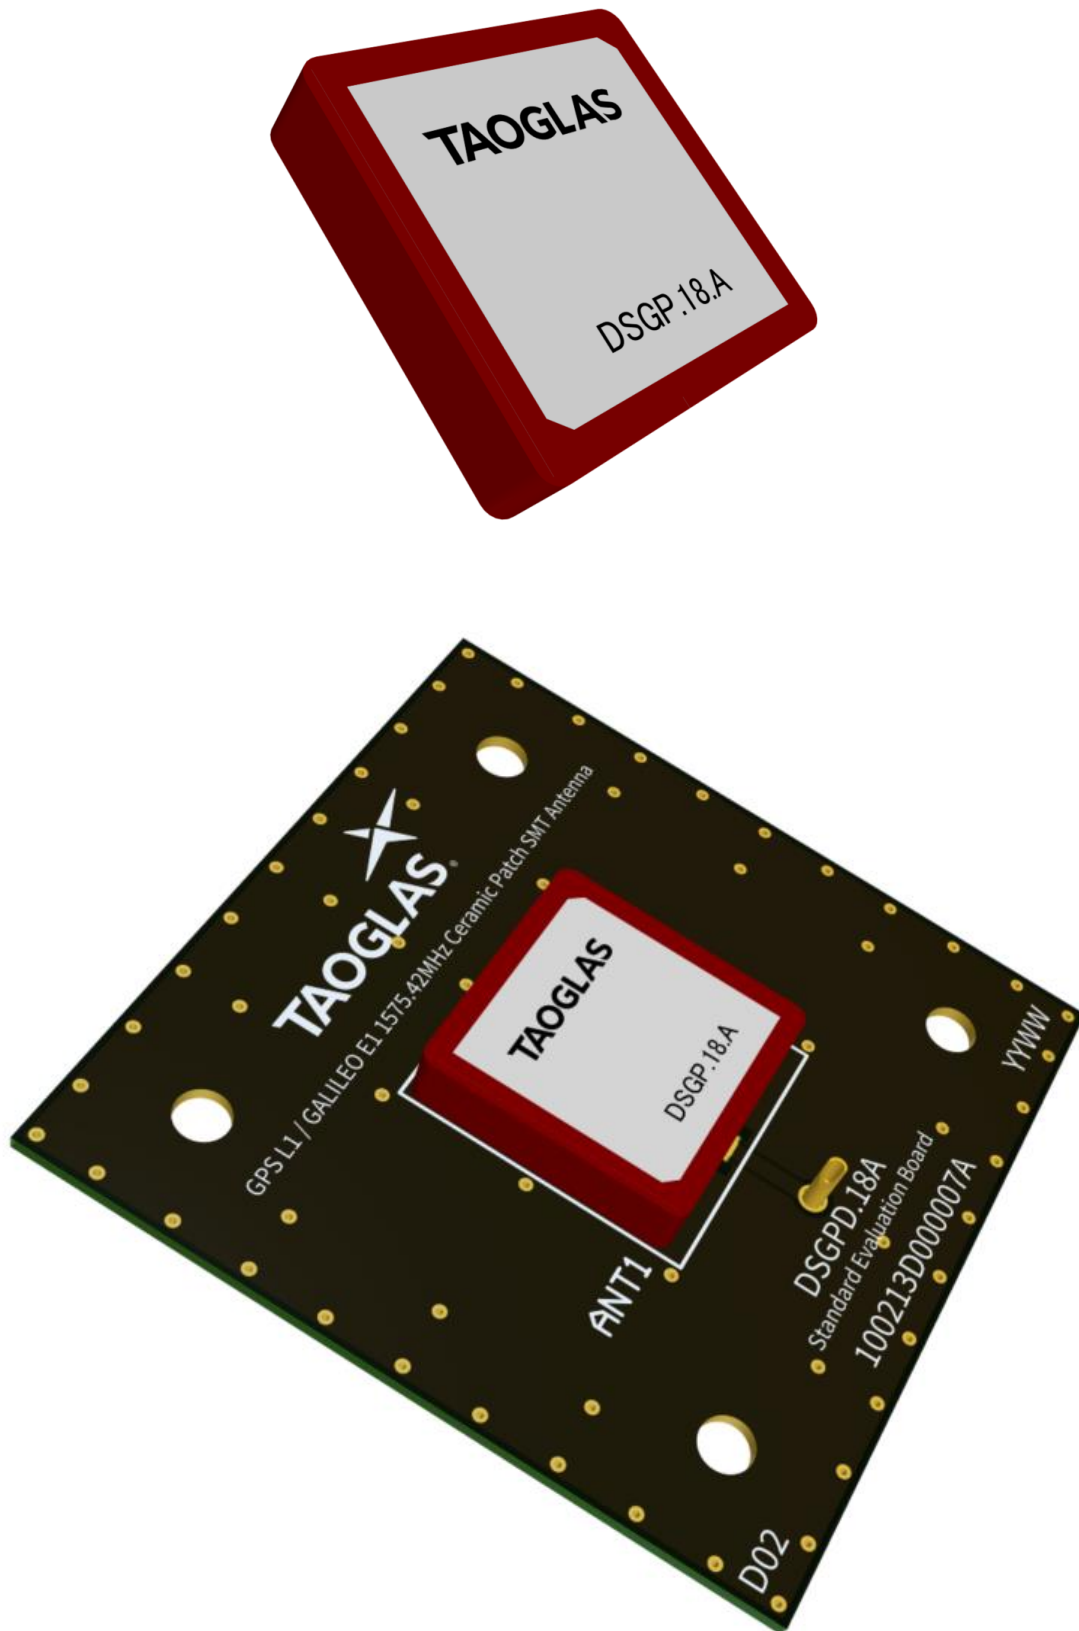


6.1 Schematic Symbol and Pin Definition

The circuit symbol for the antenna is shown below. The antenna has 8 pins with all as functional.

Pin	Description
1	RF Feed
2, 3, 4, 5, 6, 7, 8	Ground

DSGP.1575.18.4.A.02
ANT1

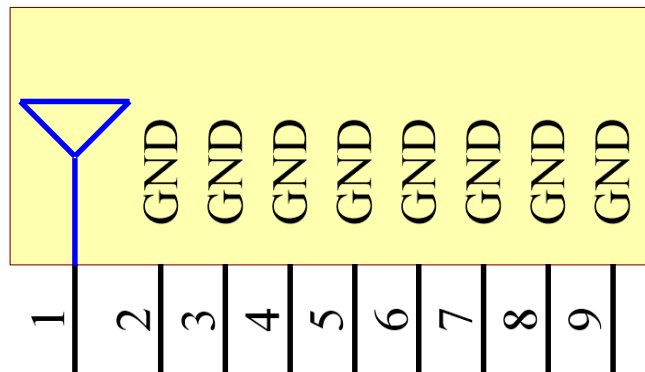


6.2 Antenna Integration

The antenna should be placed at the center of the ground plane with a length and width of 50mm. Maintaining a square symmetric ground plane shape and symmetric environment around the antenna is critical to maintaining the excellent axial ratio and phase center performance shown in this datasheet.




Top Side w/ Solder Mask

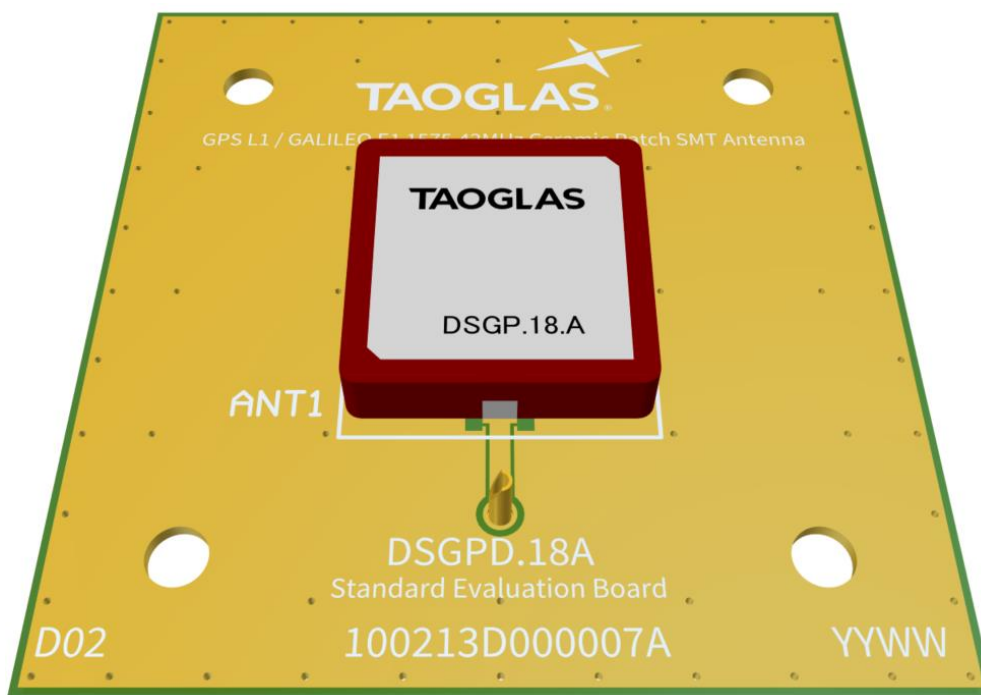


Top Side w/o Solder Mask

6.3 PCB Layout

The footprint and clearance on the PCB must comply with the antenna specification. The PCB layout shown in the diagram below demonstrates the antenna footprint.

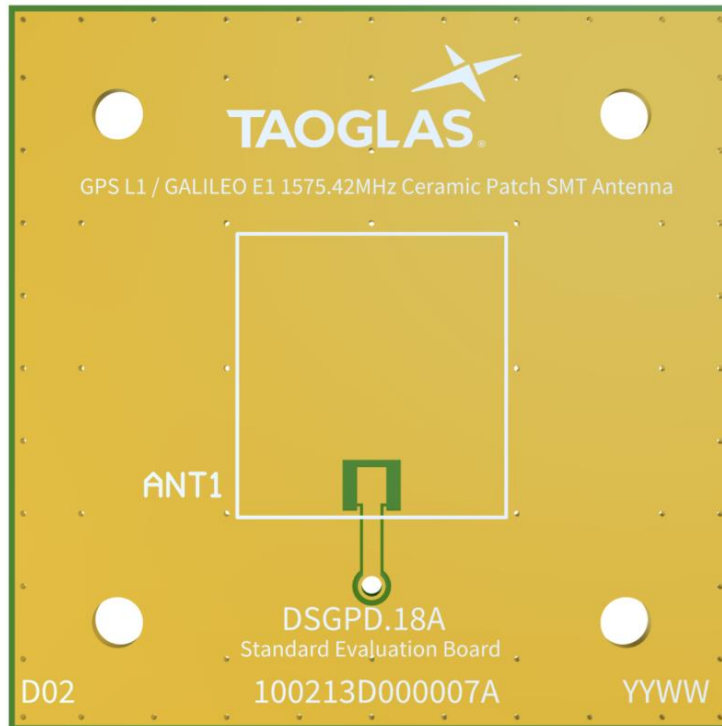


Topside

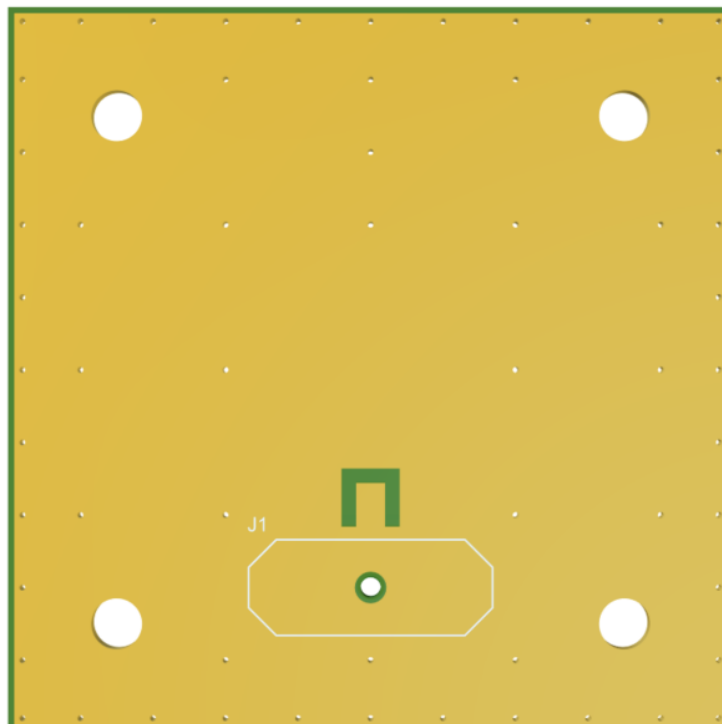


Bottom Side

6.4 Evaluation Board

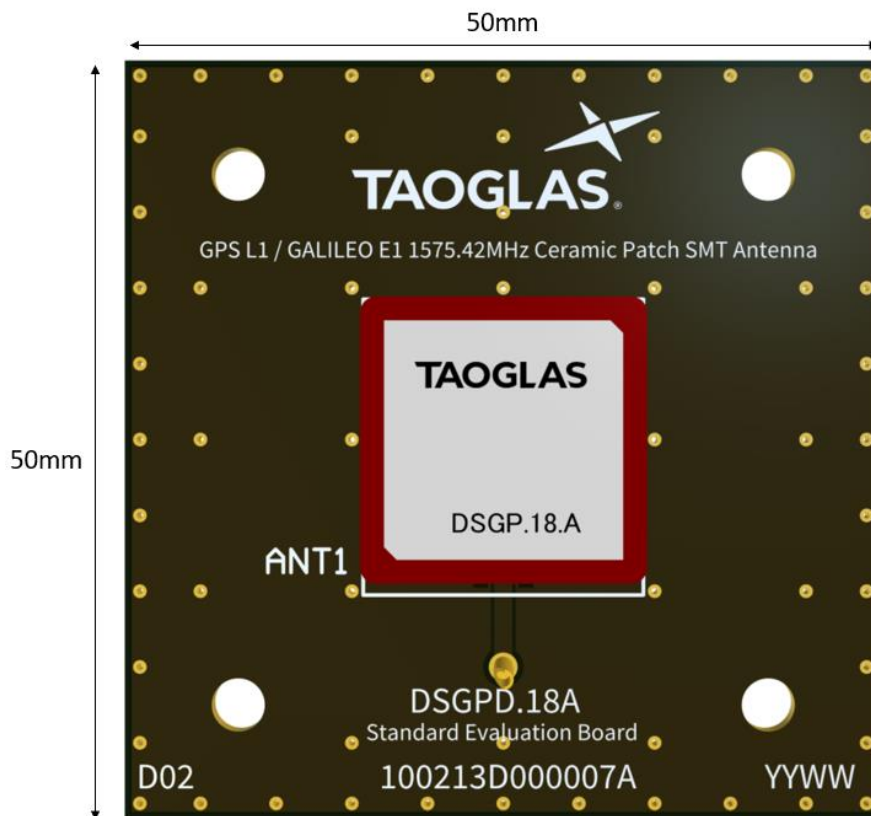


Topside

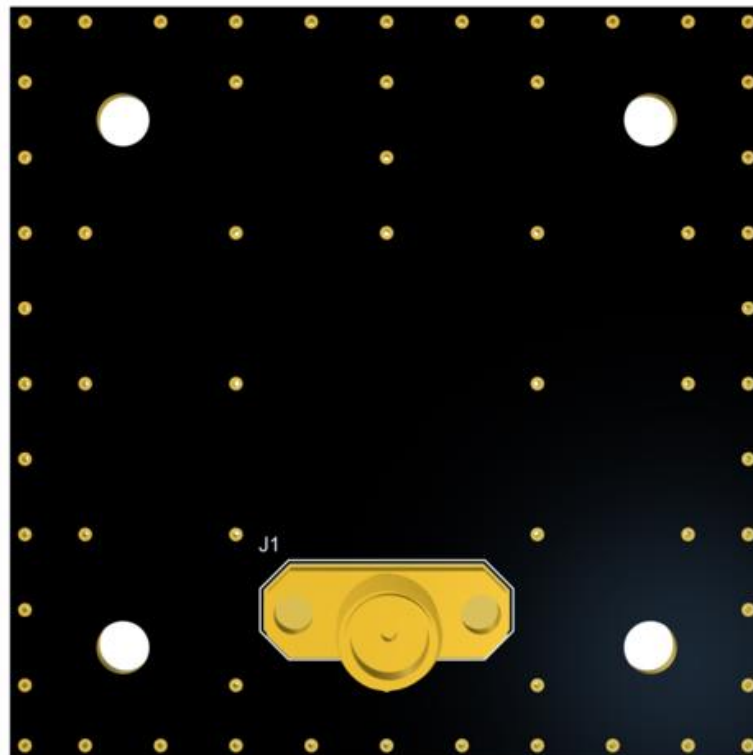

Bottom Side

7. Evaluation Board Mechanical Drawing


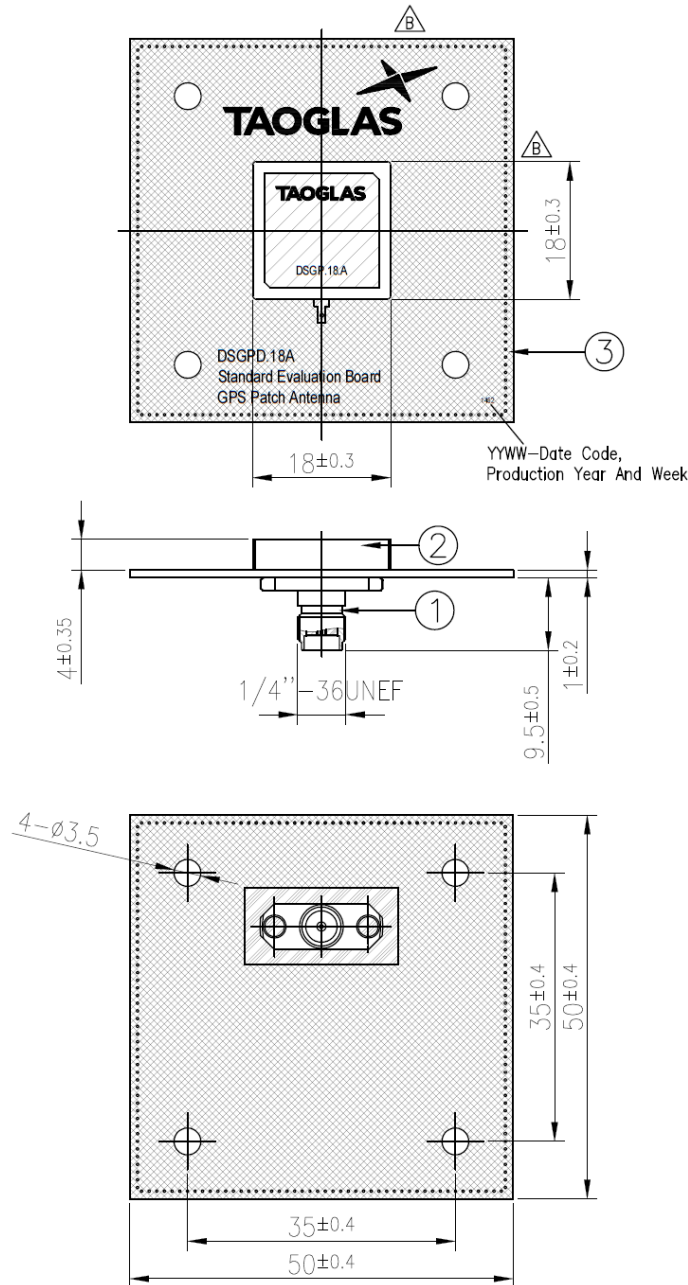




Notes






- 1. Silver area
- 2. Solder mask
- 3. Solder Area

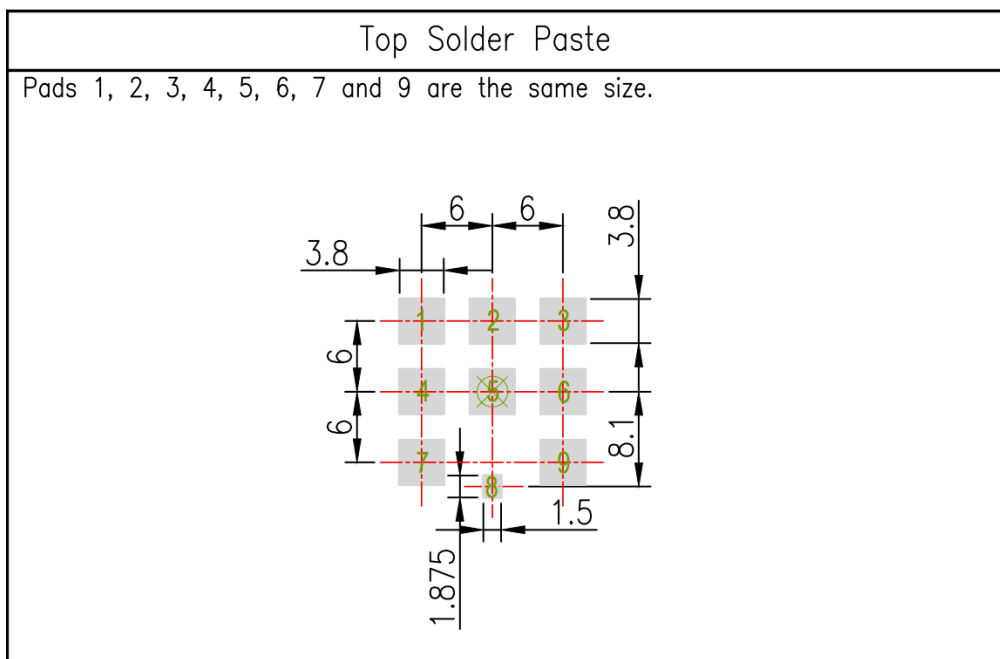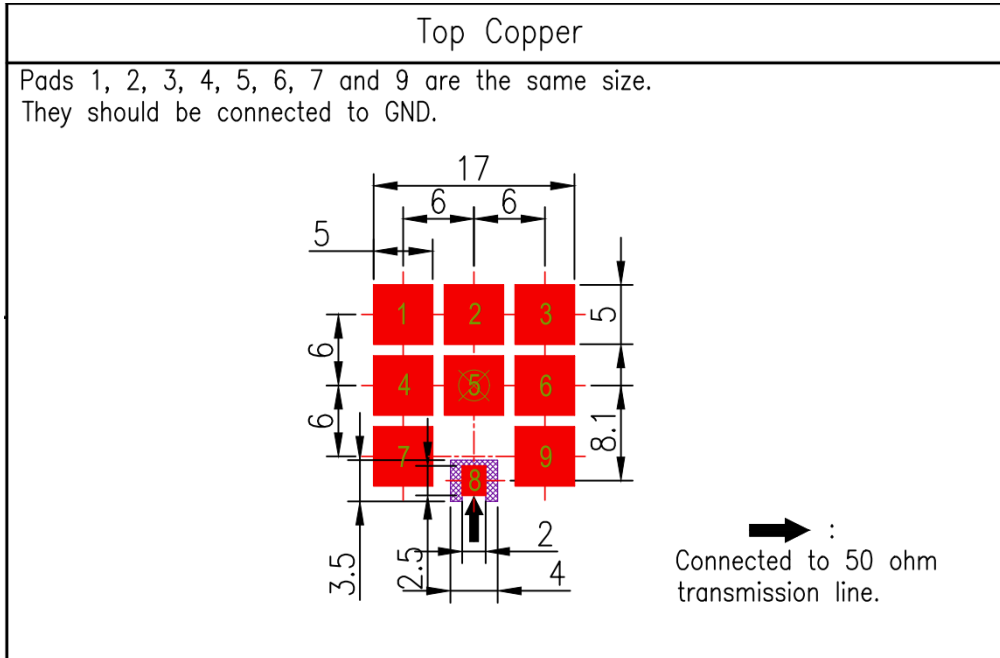	Name	P/N	Material	Finish	QTY
1	PCB SMA(F) ST	200411I000007A	FR4	Au Plated	1
2	DSGP.1575.18.4.A.02 Antenna	001514L060007A	Ceramic	Clear	1
3	PCB (50x50x1mm)	100213D000007A	FR4 1.0t	Black	1

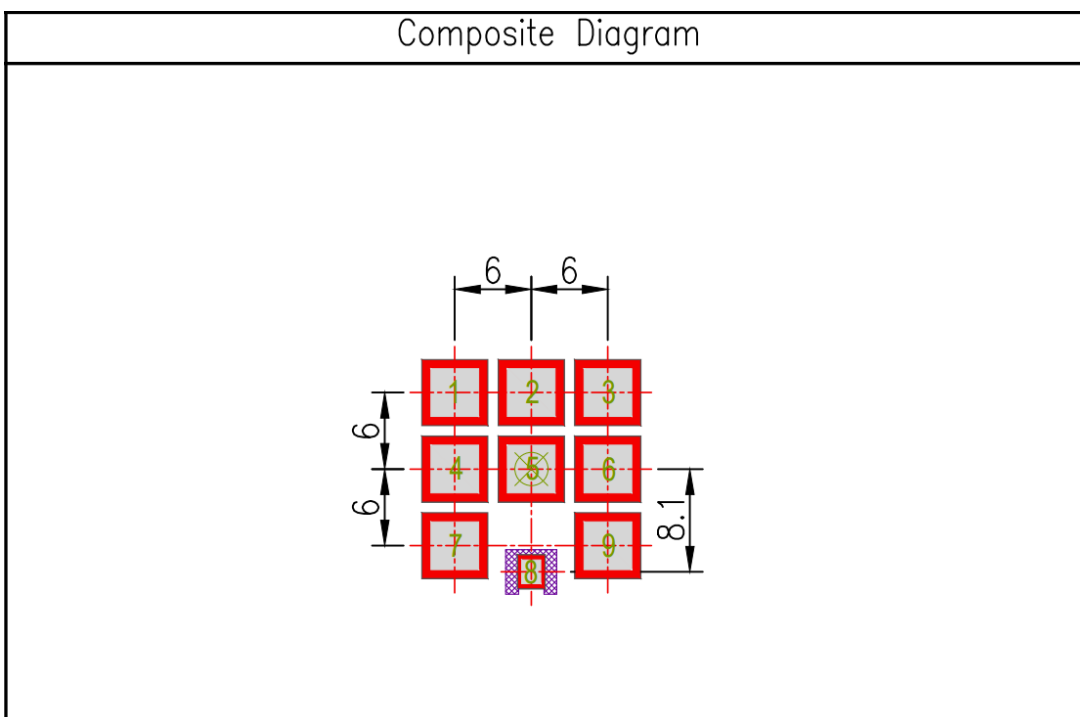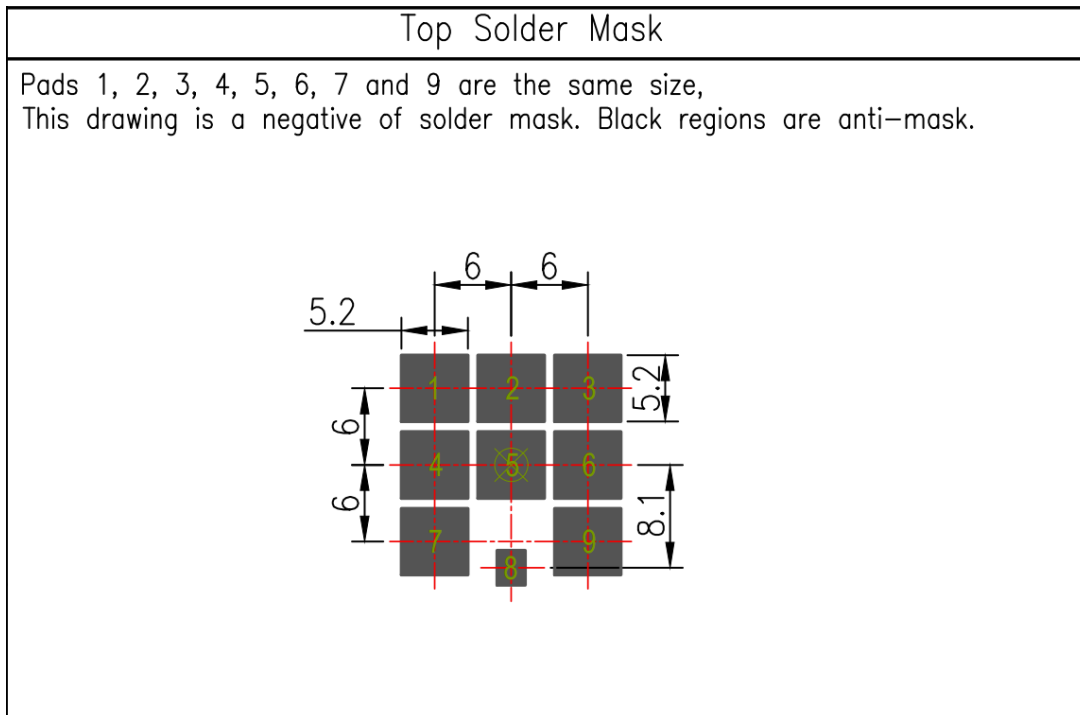8. PCB Footprint Recommendation






- NOTE:
- | | | |
|------------------------|---|---|
| 1. Ag Plated area |  | 6. Copper keepout should extend through all PCB layers. |
| 2. Solder Mask area |  | 7. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow. |
| 3. Copper area |  | |
| 4. Paste area |  | |
| 5. Copper Keepout Area |  | 8. The dimension tolerances should follow standard PCB manufacturing guidelines |

9. Recommended Reflow Soldering Profile

The DSGP.1575.18.4.A.02 can be assembled by following the recommended soldering temperatures are as follows:

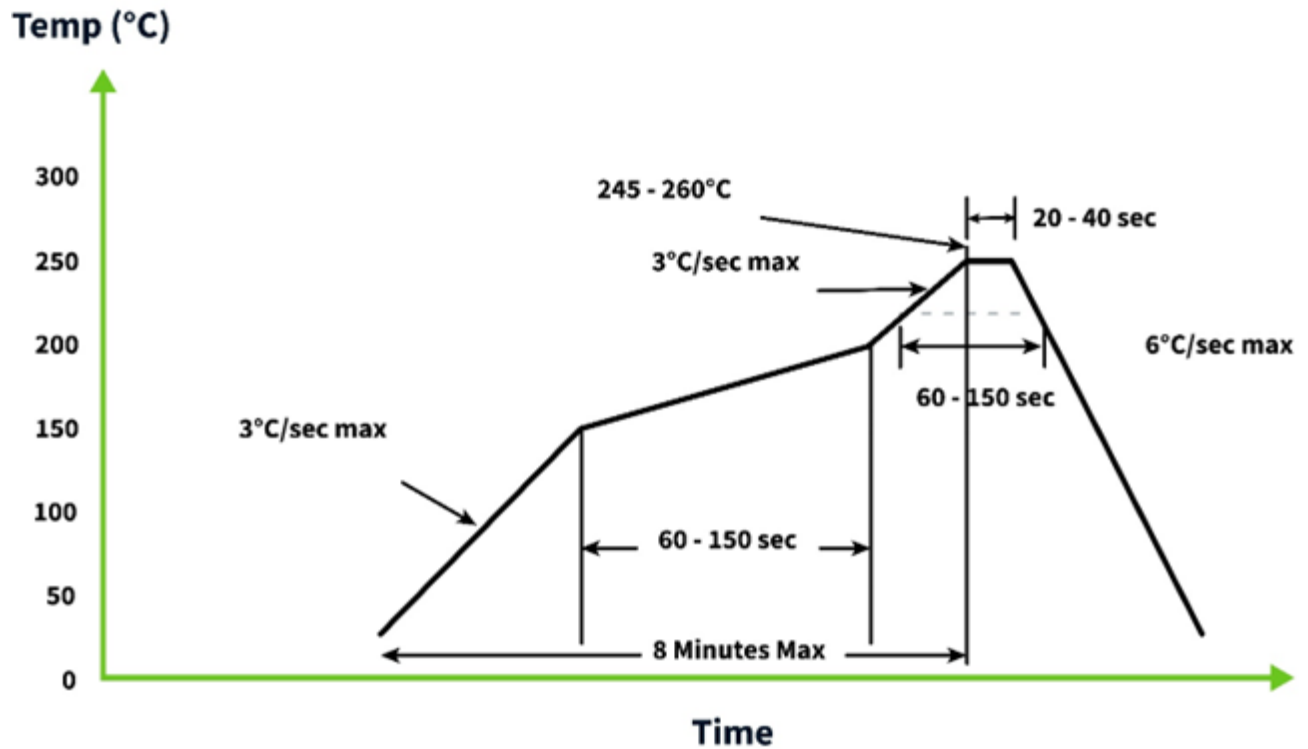


*Temperatures listed within a tolerance of +/- 10° C

Smaller components are typically mounted on the first pass, however, we do advise mounting the DSGP.1575.18.4.A.02 when placing larger components on the board during subsequent reflows.


10. Packaging

Packaging Specifications (1/2)


200 pc DSGP.1575.18.4.A.02 per reel
 Dimensions - Ø330*50mm
 Weight - 1556.5g

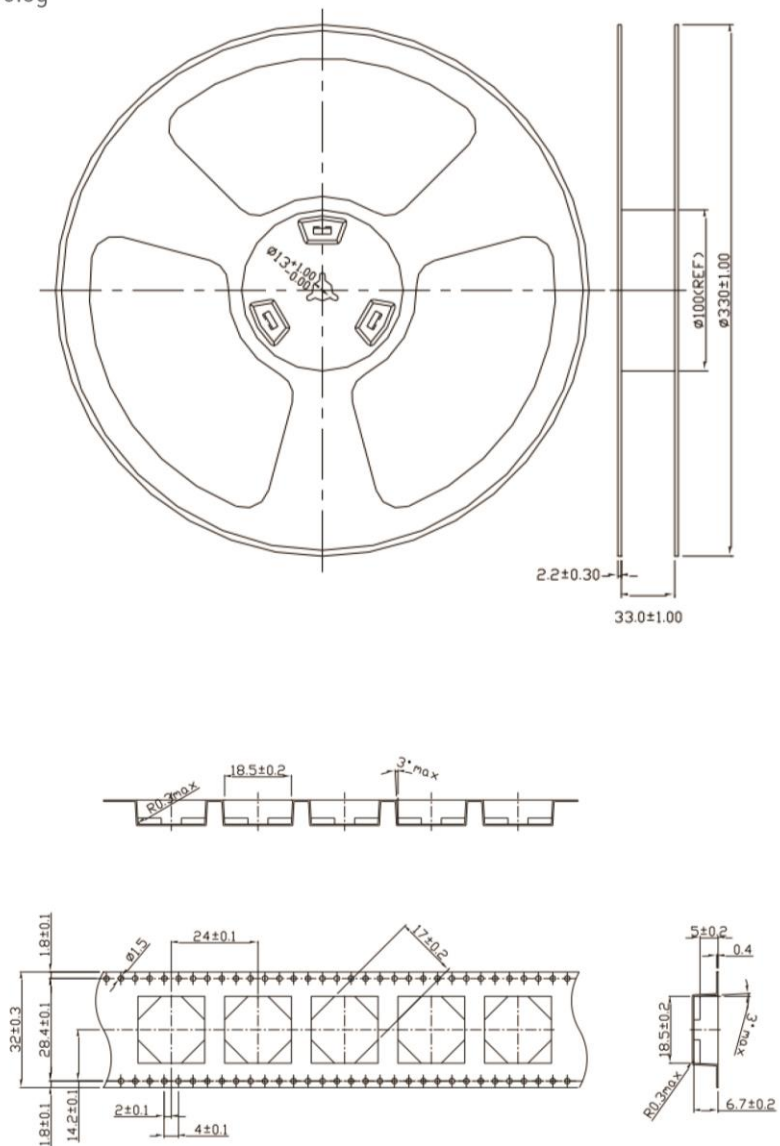


1 pc reel in small in Anti-static Bag
 Dimensions - 340*350*70mm
 Weight - 1.86Kg

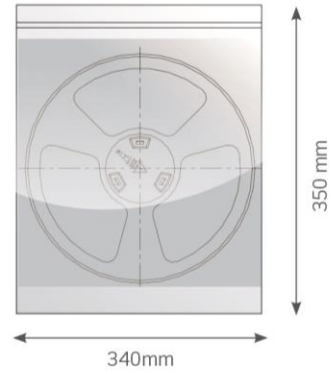

4 Reels in Anti-static Bags
 800 pcs in one carton
 Carton Dimensions - 370*360*305mm
 Weight - 8.2Kg

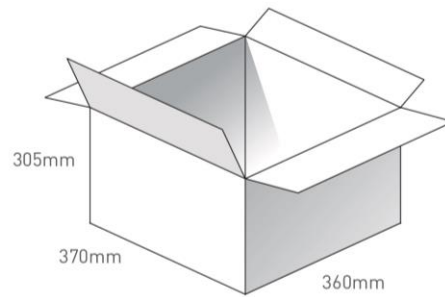

Pallet Dimensions 1200*1000*1420mm
 24 Cartons per Pallet
 6 Cartons per layer
 4 Layers

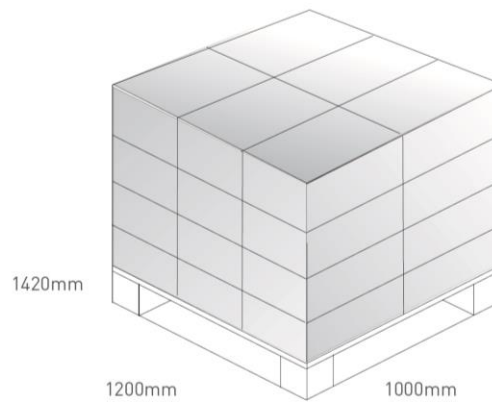

Changelog for the datasheet

SPE-17-8-030 – DSGP.1575.18.4.A.02

Revision: D (Current Version)

Date:	2024-10-24
Changes:	Updated Solder Reflow Profile
Changes Made by:	Gary West

Previous Revisions

Revision: C

Date:	2023-03-24
Changes:	Antenna Integration Guide Added
Changes Made by:	Cesar Sousa

Revision: B

Date:	2018-12-18
Changes:	Updated Specifications
Changes Made by:	Jack Conroy

Revision: A (Original First Release)

Date:	2017-05-22
Notes:	
Author:	Jack Conroy



www.taoglas.com



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View DSGP.1575.18.4.A.02 on WIN SOURCE](#)
- ⊖ [Taoglas Limited Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management