

## Varistors (ZNR Surge Absorber)

D type

V series



For Varistor Voltages ranging from 200 to 1100V, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)

### Features

- Large withstanding surge current capability in compact sizes
- Large "Energy Handling Capability" absorbing transient overvoltages in compact sizes
- Wide range of varistor voltages
- RoHS compliant

### Recommended applications

- Transistor, diode, IC, thyristor or triac semiconductor protection
- Surge protection in consumer electronic equipment
- Surge protection in communication, measuring or controller electronics
- Surge protection in electronic home appliances, gas or petroleum appliances


### Applicable standards

- UL1449 (VZCA2/UL, VZCA8/C-UL)
- VDE IEC61051-1, -2, -2-2, IEC60950-1 Annex.Q, IEC62368-1 G8.1
- CSA C22.2 N 269.5
- CQC (GB/T10193, GB/T10194, GB4943.1)


Refer to "Standard Products" , and "Application Note for Safety Standards" , for the details.

■ As for handling precautions and minimum quantity / Packing unit please see related information.

### Explanation of part numbers (Bulk)

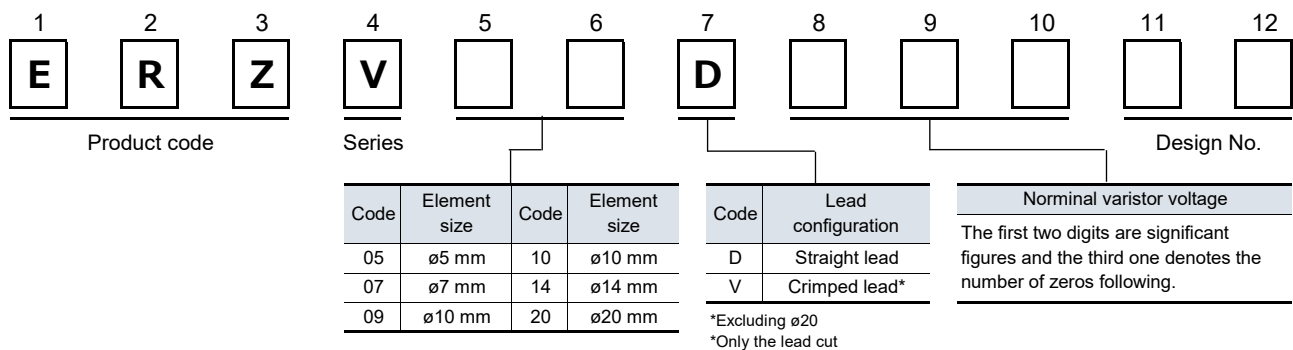

### Explanation of part numbers (Taping)

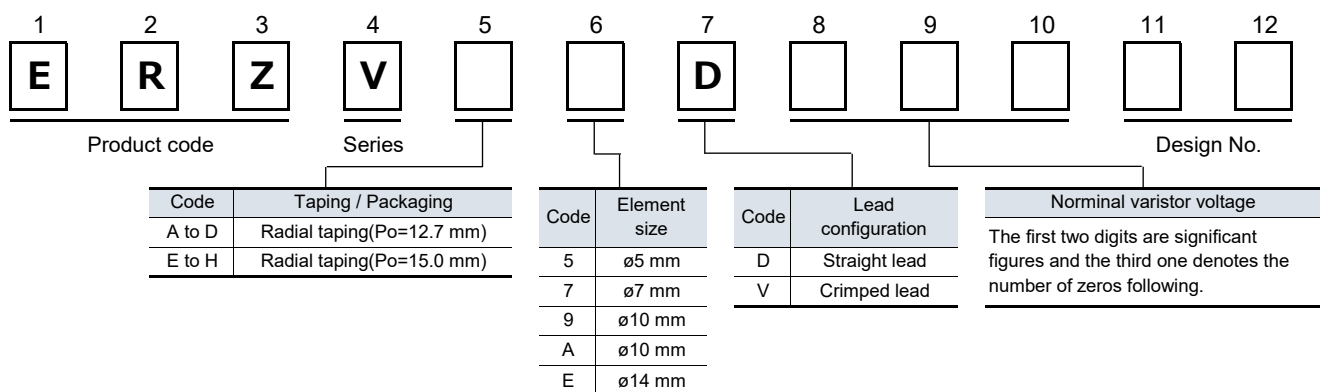

## Reference guide to standard products

| Part No.   | Applicable standards |           | Varistor voltage* | Maximum allowable voltage |        | Clamping voltage 8/20 $\mu$ s |        | Maximum peak current at 8/20 $\mu$ s (A) |         |
|------------|----------------------|-----------|-------------------|---------------------------|--------|-------------------------------|--------|------------------------------------------|---------|
|            | Type name            | Approvals | (V)               | AC rms (V)                | DC (V) | max.(V)                       | Ip (A) | 1 time                                   | 2 times |
| ERZV05D180 | V180                 | ◇         | 18<br>(16 to 20)  | 11                        | 14     | 40                            | 1      | 250                                      | 125     |
| ERZV07D180 | V7180                | ◇         |                   |                           |        | 36                            | 2.5    | 500                                      | 250     |
| ERZV09D180 | V9180                | ◇         |                   |                           |        | 36                            | 5      | 1000                                     | 500     |
| ERZV10D180 | V10180               | ◇         |                   |                           |        | 36                            | 5      | 1000                                     | 500     |
| ERZV14D180 | V14180               | ◇         |                   |                           |        | 36                            | 10     | 2000                                     | 1000    |
| ERZV20D180 | V20180               | ◇         |                   |                           |        | 36                            | 20     | 3000                                     | 2000    |
| ERZV05D220 | V220                 | ◇         | 22<br>(20 to 24)  | 14                        | 18     | 48                            | 1      | 250                                      | 125     |
| ERZV07D220 | V7220                | ◇         |                   |                           |        | 43                            | 2.5    | 500                                      | 250     |
| ERZV09D220 | V9220                | ◇         |                   |                           |        | 43                            | 5      | 1000                                     | 500     |
| ERZV10D220 | V10220               | ◇         |                   |                           |        | 43                            | 5      | 1000                                     | 500     |
| ERZV14D220 | V14220               | ◇         |                   |                           |        | 43                            | 10     | 2000                                     | 1000    |
| ERZV20D220 | V20220               | ◇         |                   |                           |        | 43                            | 20     | 3000                                     | 2000    |
| ERZV05D270 | V270                 | ◇         | 27<br>(24 to 30)  | 17                        | 22     | 60                            | 1      | 250                                      | 125     |
| ERZV07D270 | V7270                | ◇         |                   |                           |        | 53                            | 2.5    | 500                                      | 250     |
| ERZV09D270 | V9270                | ◇         |                   |                           |        | 53                            | 5      | 1000                                     | 500     |
| ERZV10D270 | V10270               | ◇         |                   |                           |        | 53                            | 5      | 1000                                     | 500     |
| ERZV14D270 | V14270               | ◇         |                   |                           |        | 53                            | 10     | 2000                                     | 1000    |
| ERZV20D270 | V20270               | ◇         |                   |                           |        | 53                            | 20     | 3000                                     | 2000    |
| ERZV05D330 | V330                 | ◇         | 33<br>(30 to 36)  | 20                        | 26     | 73                            | 1      | 250                                      | 125     |
| ERZV07D330 | V7330                | ◇         |                   |                           |        | 65                            | 2.5    | 500                                      | 250     |
| ERZV09D330 | V9330                | ◇         |                   |                           |        | 65                            | 5      | 1000                                     | 500     |
| ERZV10D330 | V10330               | ◇         |                   |                           |        | 65                            | 5      | 1000                                     | 500     |
| ERZV14D330 | V14330               | ◇         |                   |                           |        | 65                            | 10     | 2000                                     | 1000    |
| ERZV20D330 | V20330               | ◇         |                   |                           |        | 65                            | 20     | 3000                                     | 2000    |
| ERZV05D390 | V390                 | ◇         | 39<br>(35 to 43)  | 25                        | 31     | 86                            | 1      | 250                                      | 125     |
| ERZV07D390 | V7390                | ◇         |                   |                           |        | 77                            | 2.5    | 500                                      | 250     |
| ERZV09D390 | V9390                | ◇         |                   |                           |        | 77                            | 5      | 1000                                     | 500     |
| ERZV10D390 | V10390               | ◇         |                   |                           |        | 77                            | 5      | 1000                                     | 500     |
| ERZV14D390 | V14390               | ◇         |                   |                           |        | 77                            | 10     | 2000                                     | 1000    |
| ERZV20D390 | V20390               | ◇         |                   |                           |        | 77                            | 20     | 3000                                     | 2000    |
| ERZV05D470 | V470                 | ◇         | 47<br>(42 to 52)  | 30                        | 38     | 104                           | 1      | 250                                      | 125     |
| ERZV07D470 | V7470                | ◇         |                   |                           |        | 93                            | 2.5    | 500                                      | 250     |
| ERZV09D470 | V9470                | ◇         |                   |                           |        | 93                            | 5      | 1000                                     | 500     |
| ERZV10D470 | V10470               | ◇         |                   |                           |        | 93                            | 5      | 1000                                     | 500     |
| ERZV14D470 | V14470               | ◇         |                   |                           |        | 93                            | 10     | 2000                                     | 1000    |
| ERZV20D470 | V20470               | ◇         |                   |                           |        | 93                            | 20     | 3000                                     | 2000    |
| ERZV05D560 | V560                 | ◇         | 56<br>(50 to 62)  | 35                        | 45     | 123                           | 1      | 250                                      | 125     |
| ERZV07D560 | V7560                | ◇         |                   |                           |        | 110                           | 2.5    | 500                                      | 250     |
| ERZV09D560 | V9560                | ◇         |                   |                           |        | 110                           | 5      | 1000                                     | 500     |
| ERZV10D560 | V10560               | ◇         |                   |                           |        | 110                           | 5      | 1000                                     | 500     |
| ERZV14D560 | V14560               | ◇         |                   |                           |        | 110                           | 10     | 2000                                     | 1000    |
| ERZV20D560 | V20560               | ◇         |                   |                           |        | 110                           | 20     | 3000                                     | 2000    |
| ERZV05D680 | V680                 | ◇         | 68<br>(61 to 75)  | 40                        | 56     | 150                           | 1      | 250                                      | 125     |
| ERZV07D680 | V7680                | ◇         |                   |                           |        | 135                           | 2.5    | 500                                      | 250     |
| ERZV09D680 | V9680                | ◇         |                   |                           |        | 135                           | 5      | 1000                                     | 500     |
| ERZV10D680 | V10680               | ◇         |                   |                           |        | 135                           | 5      | 1000                                     | 500     |
| ERZV14D680 | V14680               | ◇         |                   |                           |        | 135                           | 10     | 2000                                     | 1000    |
| ERZV20D680 | V20680               | ◇         |                   |                           |        | 135                           | 20     | 3000                                     | 2000    |

\* Measuring Current of Varistor Voltage 5 Series (ERZV05D □□□) : 0.1 mA, Others : 1 mA

○: UL1449 (VZCA2/UL, VZCA8/C-UL),

☆: VDE (IEC61051-1, -2, -2-2), ★: VDE (IEC60950-1 Annex.Q, IEC62368-1 G8.1), □: CSA C22.2 No.269.5

◇: CQC (GB/T10193, GB/T10194), ◆: CQC (GB4943.1)

※Approval number (File No.) of safety regulations are subject to revision without notice. Ask factory for a copy of the latest file No.

## Reference guide to standard products

| Part No.   | Applicable standards |           | Varistor voltage*   | Maximum allowable voltage |        | Clamping voltage 8/20 $\mu$ s |        | Maximum peak current at 8/20 $\mu$ s (A) |         |
|------------|----------------------|-----------|---------------------|---------------------------|--------|-------------------------------|--------|------------------------------------------|---------|
|            | Type name            | Approvals | (V)                 | AC rms (V)                | DC (V) | max.(V)                       | Ip (A) | 1 time                                   | 2 times |
| ERZV05D820 | V820U                | ○☆◇       | 82<br>(74 to 90)    | 50                        | 65     | 145                           | 5      | 800                                      | 600     |
| ERZV07D820 | V7820U               | ○☆◇       |                     |                           |        | 135                           | 10     | 1750                                     | 1250    |
| ERZV09D820 | V9820U               | ○☆◇       |                     |                           |        | 135                           | 25     | 3500                                     | 2500    |
| ERZV10D820 | V10820U              | ○☆◇       |                     |                           |        | 135                           | 25     | 3500                                     | 2500    |
| ERZV14D820 | V14820U              | ○☆◇       |                     |                           |        | 135                           | 50     | 6000                                     | 5000    |
| ERZV20D820 | V20820U              | ○☆◇       |                     |                           |        | 135                           | 100    | 10000                                    | 7000    |
| ERZV05D101 | V101U                | ○☆◇       | 100<br>(90 to 110)  | 60                        | 85     | 175                           | 5      | 800                                      | 600     |
| ERZV07D101 | V7101U               | ○☆◇       |                     |                           |        | 165                           | 10     | 1750                                     | 1250    |
| ERZV09D101 | V9101U               | ○☆◇       |                     |                           |        | 165                           | 25     | 3500                                     | 2500    |
| ERZV10D101 | V10101U              | ○☆◇       |                     |                           |        | 165                           | 25     | 3500                                     | 2500    |
| ERZV14D101 | V14101U              | ○☆◇       |                     |                           |        | 165                           | 50     | 6000                                     | 5000    |
| ERZV20D101 | V20101U              | ○☆◇       |                     |                           |        | 165                           | 100    | 10000                                    | 7000    |
| ERZV05D121 | V121U                | ○☆◇       | 120<br>(108 to 132) | 75                        | 100    | 210                           | 5      | 800                                      | 600     |
| ERZV07D121 | V7121U               | ○☆◇       |                     |                           |        | 200                           | 10     | 1750                                     | 1250    |
| ERZV09D121 | V9121U               | ○☆◇       |                     |                           |        | 200                           | 25     | 3500                                     | 2500    |
| ERZV10D121 | V10121U              | ○☆◇       |                     |                           |        | 200                           | 25     | 3500                                     | 2500    |
| ERZV14D121 | V14121U              | ○☆◇       |                     |                           |        | 200                           | 50     | 6000                                     | 5000    |
| ERZV20D121 | V20121U              | ○☆◇       |                     |                           |        | 200                           | 100    | 10000                                    | 7000    |
| ERZV05D151 | V151U                | ○☆◇       | 150<br>(135 to 165) | 95                        | 125    | 260                           | 5      | 800                                      | 600     |
| ERZV07D151 | V7151U               | ○☆◇       |                     |                           |        | 250                           | 10     | 1750                                     | 1250    |
| ERZV09D151 | V9151U               | ○☆◇       |                     |                           |        | 250                           | 25     | 3500                                     | 2500    |
| ERZV10D151 | V10151U              | ○☆◇       |                     |                           |        | 250                           | 25     | 3500                                     | 2500    |
| ERZV14D151 | V14151U              | ○☆◇       |                     |                           |        | 250                           | 50     | 6000                                     | 5000    |
| ERZV20D151 | V20151U              | ○☆◇       |                     |                           |        | 250                           | 100    | 10000                                    | 7000    |
| ERZV05D201 | V201U                | ○☆□◇      | 200<br>(185 to 225) | 130                       | 170    | 355                           | 5      | 800                                      | 600     |
| ERZV07D201 | V7201U               | ○☆□◇      |                     |                           |        | 340                           | 10     | 1750                                     | 1250    |
| ERZV09D201 | V9201U               | ○☆□◇      |                     |                           |        | 340                           | 25     | 3500                                     | 2500    |
| ERZV10D201 | V10201U              | ○☆□◇      |                     |                           |        | 340                           | 25     | 3500                                     | 2500    |
| ERZV14D201 | V14201U              | ○☆★□◇◆    |                     |                           |        | 340                           | 50     | 6000                                     | 5000    |
| ERZV20D201 | V20201U              | ○☆★□◇◆    |                     |                           |        | 340                           | 100    | 10000                                    | 7000    |
| ERZV05D221 | V221U                | ○☆□◇      | 220<br>(198 to 242) | 140                       | 180    | 380                           | 5      | 800                                      | 600     |
| ERZV07D221 | V7221U               | ○☆□◇      |                     |                           |        | 360                           | 10     | 1750                                     | 1250    |
| ERZV09D221 | V9221U               | ○☆□◇      |                     |                           |        | 360                           | 25     | 3500                                     | 2500    |
| ERZV10D221 | V10221U              | ○☆□◇      |                     |                           |        | 360                           | 25     | 3500                                     | 2500    |
| ERZV14D221 | V14221U              | ○☆★□◇◆    |                     |                           |        | 360                           | 50     | 6000                                     | 5000    |
| ERZV20D221 | V20221U              | ○☆★□◇◆    |                     |                           |        | 360                           | 100    | 10000                                    | 7000    |
| ERZV05D241 | V241U                | ○☆□◇      | 240<br>(216 to 264) | 150                       | 200    | 415                           | 5      | 800                                      | 600     |
| ERZV07D241 | V7241U               | ○☆□◇      |                     |                           |        | 395                           | 10     | 1750                                     | 1250    |
| ERZV09D241 | V9241U               | ○☆□◇      |                     |                           |        | 395                           | 25     | 3500                                     | 2500    |
| ERZV10D241 | V10241U              | ○☆□◇      |                     |                           |        | 395                           | 25     | 3500                                     | 2500    |
| ERZV14D241 | V14241U              | ○☆★□◇◆    |                     |                           |        | 395                           | 50     | 6000                                     | 5000    |
| ERZV20D241 | V20241U              | ○☆★□◇◆    |                     |                           |        | 395                           | 100    | 10000                                    | 7000    |
| ERZV05D271 | V271U                | ○☆□◇      | 270<br>(247 to 303) | 175                       | 225    | 475                           | 5      | 800                                      | 600     |
| ERZV07D271 | V7271U               | ○☆□◇      |                     |                           |        | 455                           | 10     | 1750                                     | 1250    |
| ERZV09D271 | V9271U               | ○☆□◇      |                     |                           |        | 455                           | 25     | 3500                                     | 2500    |
| ERZV10D271 | V10271U              | ○☆□◇      |                     |                           |        | 455                           | 25     | 3500                                     | 2500    |
| ERZV14D271 | V14271U              | ○☆★□◇◆    |                     |                           |        | 455                           | 50     | 6000                                     | 5000    |
| ERZV20D271 | V20271U              | ○☆★□◇◆    |                     |                           |        | 455                           | 100    | 10000                                    | 7000    |

\* Measuring Current of Varistor Voltage 5 Series (ERZV05D □□□) : 0.1 mA, Others : 1 mA

○: UL1449 (VZCA2/UL, VZCA8/C-UL),

☆: VDE (IEC61051-1, -2, -2-2), ★: VDE (IEC60950-1 Annex.Q, IEC62368-1 G8.1), □: CSA C22.2 No.269.5

◇: CQC (GB/T10193, GB/T10194), ◆: CQC (GB4943.1)

※Approval number (File No.) of safety regulations are subject to revision without notice. Ask factory for a copy of the latest file No.

## Reference guide to standard products

| Part No.   | Applicable standards |           | Varistor voltage*   | Maximum allowable voltage |        | Clamping voltage 8/20 $\mu$ s |        | Maximum peak current at 8/20 $\mu$ s (A) |         |
|------------|----------------------|-----------|---------------------|---------------------------|--------|-------------------------------|--------|------------------------------------------|---------|
|            | Type name            | Approvals | (V)                 | AC rms (V)                | DC (V) | max.(V)                       | Ip (A) | 1 time                                   | 2 times |
| ERZV05D331 | V331U                | ○☆□◇      | 330<br>(297 to 363) | 210                       | 270    | 570                           | 5      | 800                                      | 600     |
| ERZV07D331 | V7331U               | ○☆□◇      |                     |                           |        | 545                           | 10     | 1750                                     | 1250    |
| ERZV09D331 | V9331U               | ○☆□◇      |                     |                           |        | 545                           | 25     | 3500                                     | 2500    |
| ERZV10D331 | V10331U              | ○☆□◇      |                     |                           |        | 545                           | 25     | 3500                                     | 2500    |
| ERZV14D331 | V14331U              | ○☆★□◇◆    |                     |                           |        | 545                           | 50     | 6000                                     | 4500    |
| ERZV20D331 | V20331U              | ○☆★□◇◆    |                     |                           |        | 545                           | 100    | 10000                                    | 6500    |
| ERZV05D361 | V361U                | ○☆□◇      | 360<br>(324 to 396) | 230                       | 300    | 620                           | 5      | 800                                      | 600     |
| ERZV07D361 | V7361U               | ○☆□◇      |                     |                           |        | 595                           | 10     | 1750                                     | 1250    |
| ERZV09D361 | V9361U               | ○☆□◇      |                     |                           |        | 595                           | 25     | 3500                                     | 2500    |
| ERZV10D361 | V10361U              | ○☆□◇      |                     |                           |        | 595                           | 25     | 3500                                     | 2500    |
| ERZV14D361 | V14361U              | ○☆★□◇◆    |                     |                           |        | 595                           | 50     | 6000                                     | 4500    |
| ERZV20D361 | V20361U              | ○☆★□◇◆    |                     |                           |        | 595                           | 100    | 10000                                    | 6500    |
| ERZV05D391 | V391U                | ○☆□◇      | 390<br>(351 to 429) | 250                       | 320    | 675                           | 5      | 800                                      | 600     |
| ERZV07D391 | V7391U               | ○☆□◇      |                     |                           |        | 650                           | 10     | 1750                                     | 1250    |
| ERZV09D391 | V9391U               | ○☆□◇      |                     |                           |        | 650                           | 25     | 3500                                     | 2500    |
| ERZV10D391 | V10391U              | ○☆□◇      |                     |                           |        | 650                           | 25     | 3500                                     | 2500    |
| ERZV14D391 | V14391U              | ○☆★□◇◆    |                     |                           |        | 650                           | 50     | 6000                                     | 4500    |
| ERZV20D391 | V20391U              | ○☆★□◇◆    |                     |                           |        | 650                           | 100    | 10000                                    | 6500    |
| ERZV05D431 | V431U                | ○☆□◇      | 430<br>(387 to 473) | 275                       | 350    | 745                           | 5      | 800                                      | 600     |
| ERZV07D431 | V7431U               | ○☆□◇      |                     |                           |        | 710                           | 10     | 1750                                     | 1250    |
| ERZV09D431 | V9431U               | ○☆□◇      |                     |                           |        | 710                           | 25     | 3500                                     | 2500    |
| ERZV10D431 | V10431U              | ○☆□◇      |                     |                           |        | 710                           | 25     | 3500                                     | 2500    |
| ERZV14D431 | V14431U              | ○☆★□◇◆    |                     |                           |        | 710                           | 50     | 6000                                     | 4500    |
| ERZV20D431 | V20431U              | ○☆★□◇◆    |                     |                           |        | 710                           | 100    | 10000                                    | 6500    |
| ERZV05D471 | V471U                | ○☆□◇      | 470<br>(423 to 517) | 300                       | 385    | 810                           | 5      | 800                                      | 600     |
| ERZV07D471 | V7471U               | ○☆□◇      |                     |                           |        | 775                           | 10     | 1750                                     | 1250    |
| ERZV09D471 | V9471U               | ○☆□◇      |                     |                           |        | 775                           | 25     | 3500                                     | 2500    |
| ERZV10D471 | V10471U              | ○☆★□◇◆    |                     |                           |        | 775                           | 25     | 3500                                     | 2500    |
| ERZV14D471 | V14471U              | ○☆★□◇◆    |                     |                           |        | 775                           | 50     | 6000                                     | 4500    |
| ERZV20D471 | V20471U              | ○☆★□◇◆    |                     |                           |        | 775                           | 100    | 10000                                    | 6500    |
| ERZV07D511 | V7511U               | ○☆□◇      | 510<br>(459 to 561) | 320                       | 410    | 845                           | 10     | 1750                                     | 1250    |
| ERZV09D511 | V9511U               | ○☆□◇      |                     |                           |        | 845                           | 25     | 3500                                     | 2500    |
| ERZV10D511 | V10511U              | ○☆★□◇◆    |                     |                           |        | 845                           | 25     | 3500                                     | 2500    |
| ERZV14D511 | V14511U              | ○☆★□◇◆    |                     |                           |        | 845                           | 50     | 6000                                     | 4500    |
| ERZV20D511 | V20511U              | ○☆★□◇◆    |                     |                           |        | 845                           | 100    | 10000                                    | 6500    |
| ERZV10D561 | V10561U              | ○☆★□◇◆    | 560<br>(504 to 616) | 350                       | 450    | 930                           | 25     | 3500                                     | 2500    |
| ERZV14D561 | V14561U              | ○☆★□◇◆    |                     |                           |        | 930                           | 50     | 5000                                     | 4500    |
| ERZV20D561 | V20561U              | ○☆★□◇◆    |                     |                           |        | 930                           | 100    | 7500                                     | 6500    |
| ERZV10D621 | V10621U              | ○☆★□◇◆    | 620<br>(558 to 682) | 385                       | 505    | 1025                          | 25     | 3500                                     | 2500    |
| ERZV14D621 | V14621U              | ○☆★□◇◆    |                     |                           |        | 1025                          | 50     | 5000                                     | 4500    |
| ERZV20D621 | V20621U              | ○☆★□◇◆    |                     |                           |        | 1025                          | 100    | 7500                                     | 6500    |
| ERZV10D681 | V10681U              | ○☆★□◇◆    | 680<br>(612 to 748) | 420                       | 560    | 1120                          | 25     | 3500                                     | 2500    |
| ERZV14D681 | V14681U              | ○☆★□◇◆    |                     |                           |        | 1120                          | 50     | 5000                                     | 4500    |
| ERZV20D681 | V20681U              | ○☆★□◇◆    |                     |                           |        | 1120                          | 100    | 7500                                     | 6500    |

\* Measuring Current of Varistor Voltage 5 Series (ERZV05D □□□) : 0.1 mA, Others : 1 mA

○: UL1449 (VZCA2/UL, VZCA8/C-UL),

☆: VDE (IEC61051-1, -2, -2-2), ★: VDE (IEC60950-1 Annex.Q, IEC62368-1 G8.1), □: CSA C22.2 No.269.5

◇: CQC (GB/T10193, GB/T10194), ◆: CQC (GB4943.1)

※Approval number (File No.) of safety regulations are subject to revision without notice. Ask factory for a copy of the latest file No.

## Reference guide to standard products

| Part No.     | Applicable standards |           | Varistor voltage*      | Maximum allowable voltage |        | Clamping voltage 8/20 $\mu$ s |                    | Maximum peak current at 8/20 $\mu$ s (A) |         |
|--------------|----------------------|-----------|------------------------|---------------------------|--------|-------------------------------|--------------------|------------------------------------------|---------|
|              | Type name            | Approvals | (V)                    | AC rms (V)                | DC (V) | max.(V)                       | I <sub>p</sub> (A) | 1 time                                   | 2 times |
| ERZV10D751   | V10751U              | ○☆★□◇◆    | 750<br>(675 to 825)    | 460                       | 615    | 1240                          | 25                 | 3500                                     | 2500    |
| ERZV14D751   | V14751U              | ○☆★□◇◆    |                        |                           |        | 1240                          | 50                 | 5000                                     | 4500    |
| ERZV20D751   | V20751U              | ○☆★□◇◆    |                        |                           |        | 1240                          | 100                | 7500                                     | 6500    |
| ERZV10D821   | V10821U              | ○☆★□◇◆    | 820<br>(738 to 902)    | 510                       | 670    | 1355                          | 25                 | 3500                                     | 2500    |
| ERZV14D821   | V14821U              | ○☆★□◇◆    |                        |                           |        | 1355                          | 50                 | 5000                                     | 4500    |
| ERZV20D821   | V20821U              | ○☆★□◇◆    |                        |                           |        | 1355                          | 100                | 7500                                     | 6500    |
| ERZV10D911   | V10911U              | ○☆★□◇◆    | 910<br>(819 to 1001)   | 550                       | 745    | 1500                          | 25                 | 3500                                     | 2500    |
| ERZV14D911   | V14911U              | ○☆★□◇◆    |                        |                           |        | 1500                          | 50                 | 5000                                     | 4500    |
| ERZV20D911   | V20911U              | ○☆★□◇◆    |                        |                           |        | 1500                          | 100                | 7500                                     | 6500    |
| ERZV10D102   | V10102U              | ○☆★□◇◆    | 1000<br>(900 to 1100)  | 625                       | 825    | 1650                          | 25                 | 3500                                     | 2500    |
| ERZV14D102   | V14102U              | ○☆★□◇◆    |                        |                           |        | 1650                          | 50                 | 5000                                     | 4500    |
| ERZV20D102   | V20102U              | ○☆★□◇◆    |                        |                           |        | 1650                          | 100                | 7500                                     | 6500    |
| ERZV10D112   | V10112U              | ○☆★□◇◆    | 1100<br>(990 to 1210)  | 680                       | 895    | 1815                          | 25                 | 3500                                     | 2500    |
| ERZV14D112   | V14112U              | ○☆★□◇◆    |                        |                           |        | 1815                          | 50                 | 5000                                     | 4500    |
| ERZV20D112   | V20112U              | ○☆★□◇◆    |                        |                           |        | 1815                          | 100                | 7500                                     | 6500    |
| ERZV10D182CS | V10182U              | ○☆★□◇◆    | 1800<br>(1700 to 1980) | 1000                      | 1465   | 2970                          | 25                 | 3500                                     | 2500    |
| ERZV14D182CS | V14182U              | ○☆★□◇◆    |                        |                           |        | 2970                          | 50                 | 5000                                     | 4500    |
| ERZV20D182   | V20182U              | ○☆★□◇◆    |                        |                           |        | 2970                          | 100                | 7500                                     | 6500    |

\* Measuring Current of Varistor Voltage 5 Series (ERZV05D □□□) : 0.1 mA, Others : 1 mA

○: UL1449 (VZCA2/UL, VZCA8/C-UL),

☆: VDE (IEC61051-1, -2, -2-2), ★: VDE (IEC60950-1 Annex.Q, IEC62368-1 G8.1), □: CSA C22.2 No.269.5

◇: CQC (GB/T10193, GB/T10194), ◆: CQC (GB4943.1)

※Approval number (File No.) of safety regulations are subject to revision without notice. Ask factory for a copy of the latest file No.

## Ratings and characteristics

●Operating temperature range : -40 to 85 °C

●Storage temperature range : -40 to 125 °C

| Part No.   | Varistor<br>voltage<br>at 0.1 m A | Maximum<br>allowable voltage |           | Clamping<br>voltage<br>(max.)<br>**I <sub>p</sub> | Rated<br>power | Maximum energy      |               | Maximum<br>peak current<br>(8/20 μs) |                | Capacitance<br>(max.)<br>at 1 kHz |
|------------|-----------------------------------|------------------------------|-----------|---------------------------------------------------|----------------|---------------------|---------------|--------------------------------------|----------------|-----------------------------------|
|            |                                   |                              |           |                                                   |                |                     |               |                                      |                |                                   |
|            | (V)                               | AC rms<br>(V)                | DC<br>(V) | (V)                                               | (W)            | (10/1000 μs)<br>(J) | (2 ms)<br>(J) | 1 time<br>(A)                        | 2 times<br>(A) | (pF)                              |
| ERZV05D180 | 18(16 to 20)                      | 11                           | 14        | 40                                                | 0.01           | 0.6                 | 0.4           | 250                                  | 125            | 1600                              |
| ERZV05D220 | 22(20 to 24)                      | 14                           | 18        | 48                                                | 0.01           | 0.7                 | 0.5           | 250                                  | 125            | 1500                              |
| ERZV05D270 | 27(24 to 30)                      | 17                           | 22        | 60                                                | 0.01           | 0.9                 | 0.7           | 250                                  | 125            | 1450                              |
| ERZV05D330 | 33(30 to 36)                      | 20                           | 26        | 73                                                | 0.01           | 1.1                 | 0.8           | 250                                  | 125            | 1400                              |
| ERZV05D390 | 39(35 to 43)                      | 25                           | 31        | 86                                                | 0.01           | 1.2                 | 0.9           | 250                                  | 125            | 700                               |
| ERZV05D470 | 47(42 to 52)                      | 30                           | 38        | 104                                               | 0.01           | 1.5                 | 1.1           | 250                                  | 125            | 650                               |
| ERZV05D560 | 56(50 to 62)                      | 35                           | 45        | 123                                               | 0.01           | 1.8                 | 1.3           | 250                                  | 125            | 600                               |
| ERZV05D680 | 68(61 to 75)                      | 40                           | 56        | 150                                               | 0.01           | 2.2                 | 1.6           | 250                                  | 125            | 580                               |
| ERZV05D820 | 82(74 to 90)                      | 50                           | 65        | 145                                               | 0.1            | 3.5                 | 2.5           | 800                                  | 600            | 460                               |
| ERZV05D101 | 100(90 to 110)                    | 60                           | 85        | 175                                               | 0.1            | 4.0                 | 3.0           | 800                                  | 600            | 400                               |
| ERZV05D121 | 120(108 to 132)                   | 75                           | 100       | 210                                               | 0.1            | 5.0                 | 3.5           | 800                                  | 600            | 350                               |
| ERZV05D151 | 150(135 to 165)                   | 95                           | 125       | 260                                               | 0.1            | 6.5                 | 4.5           | 800                                  | 600            | 300                               |

★The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)

|            |                 |     |     |     |     |      |      |     |     |     |
|------------|-----------------|-----|-----|-----|-----|------|------|-----|-----|-----|
| ERZV05D201 | 200(185 to 225) | 130 | 170 | 355 | 0.1 | 8.5  | 6.0  | 800 | 600 | 120 |
| ERZV05D221 | 220(198 to 242) | 140 | 180 | 380 | 0.1 | 9.0  | 6.5  | 800 | 600 | 110 |
| ERZV05D241 | 240(216 to 264) | 150 | 200 | 415 | 0.1 | 10.5 | 7.5  | 800 | 600 | 100 |
| ERZV05D271 | 270(247 to 303) | 175 | 225 | 475 | 0.1 | 11.0 | 8.0  | 800 | 600 | 90* |
| ERZV05D331 | 330(297 to 363) | 210 | 270 | 570 | 0.1 | 13.0 | 9.5  | 800 | 600 | 80* |
| ERZV05D361 | 360(324 to 396) | 230 | 300 | 620 | 0.1 | 16.0 | 11.0 | 800 | 600 | 80* |
| ERZV05D391 | 390(351 to 429) | 250 | 320 | 675 | 0.1 | 17.0 | 12.0 | 800 | 600 | 80* |
| ERZV05D431 | 430(387 to 473) | 275 | 350 | 745 | 0.1 | 20.0 | 13.5 | 800 | 600 | 70* |
| ERZV05D471 | 470(423 to 517) | 300 | 385 | 810 | 0.1 | 21.0 | 15.0 | 800 | 600 | 60* |

\*Measured at 1 MHz      \*Ip Measuring current of clamping voltage 180 to 680 : 1 A, 820 to 471 : 5 A


## Dimensions in mm (not to scale)

Unit : mm

| Part No.   | D max. | T max. | W±1.0 | H max. | L±1.0 |
|------------|--------|--------|-------|--------|-------|
| ERZV05D180 | 7.0    | 4.5    | 5.0   | 10.0   | 1.5   |
| ERZV05D220 | 7.0    | 4.5    | 5.0   | 10.0   | 1.5   |
| ERZV05D270 | 7.0    | 4.5    | 5.0   | 10.0   | 1.5   |
| ERZV05D330 | 7.0    | 4.5    | 5.0   | 10.0   | 1.5   |
| ERZV05D390 | 7.0    | 4.5    | 5.0   | 10.0   | 1.5   |
| ERZV05D470 | 7.0    | 4.5    | 5.0   | 10.0   | 1.5   |
| ERZV05D560 | 7.0    | 4.5    | 5.0   | 10.0   | 1.5   |
| ERZV05D680 | 7.0    | 4.5    | 5.0   | 10.0   | 1.5   |
| ERZV05D820 | 7.0    | 4.1    | 5.0   | 10.0   | 1.4   |
| ERZV05D101 | 7.0    | 4.3    | 5.0   | 10.0   | 1.6   |
| ERZV05D121 | 7.0    | 4.5    | 5.0   | 10.0   | 1.8   |
| ERZV05D151 | 7.0    | 4.8    | 5.0   | 10.0   | 2.1   |

★The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)


|            |     |     |     |      |     |
|------------|-----|-----|-----|------|-----|
| ERZV05D201 | 7.0 | 4.4 | 5.0 | 10.0 | 1.7 |
| ERZV05D221 | 7.0 | 4.5 | 5.0 | 10.0 | 1.8 |
| ERZV05D241 | 7.0 | 4.6 | 5.0 | 10.0 | 1.9 |
| ERZV05D271 | 7.0 | 4.8 | 5.0 | 10.0 | 2.1 |
| ERZV05D331 | 7.0 | 5.1 | 5.0 | 10.0 | 2.4 |
| ERZV05D361 | 7.0 | 5.3 | 5.0 | 10.0 | 2.5 |
| ERZV05D391 | 7.0 | 5.4 | 5.0 | 10.0 | 2.7 |
| ERZV05D431 | 7.0 | 5.6 | 5.0 | 10.0 | 2.9 |
| ERZV05D471 | 7.0 | 5.8 | 5.0 | 10.0 | 3.1 |

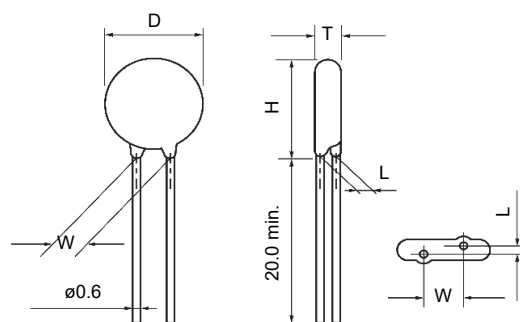

## Typical characteristics


### Voltage vs. Current

ERZV05D180 to ERZV05D680

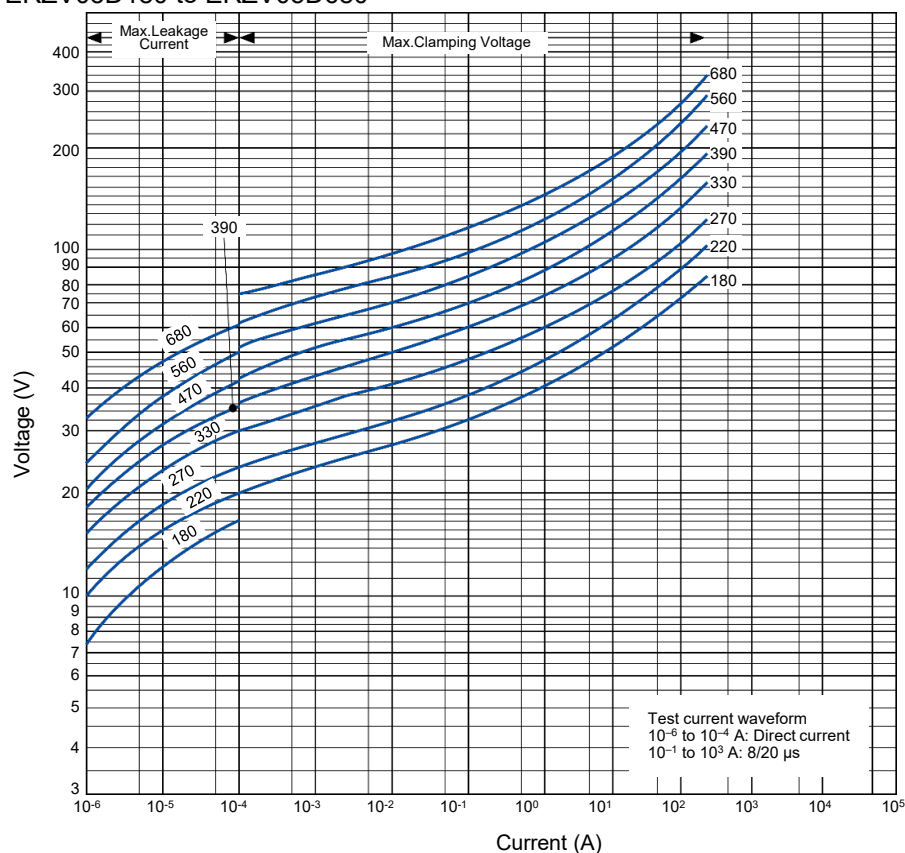


### Impulse Derating (Relation between impulse width and impulse current multiple)


ERZV05D180 to ERZV05D680

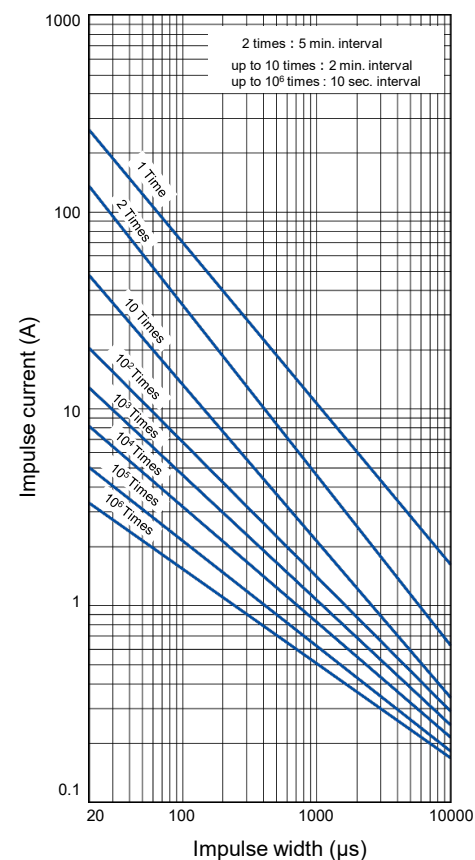

ERZV05D820 to ERZV05D471

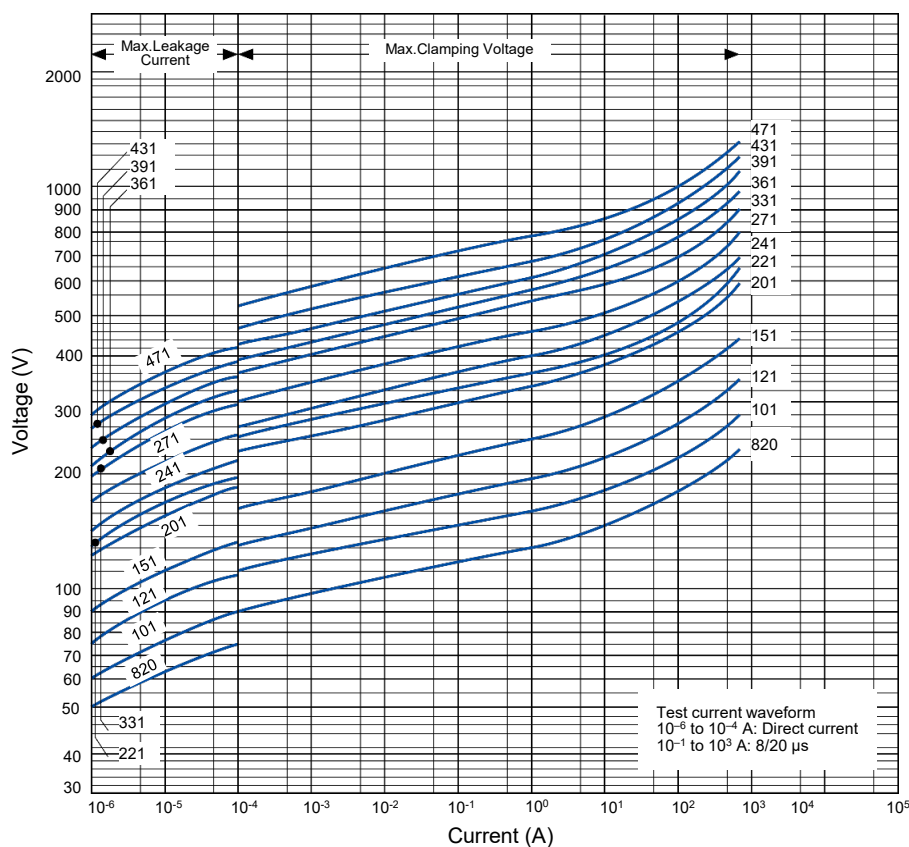

ERZV05D820 to ERZV05D471

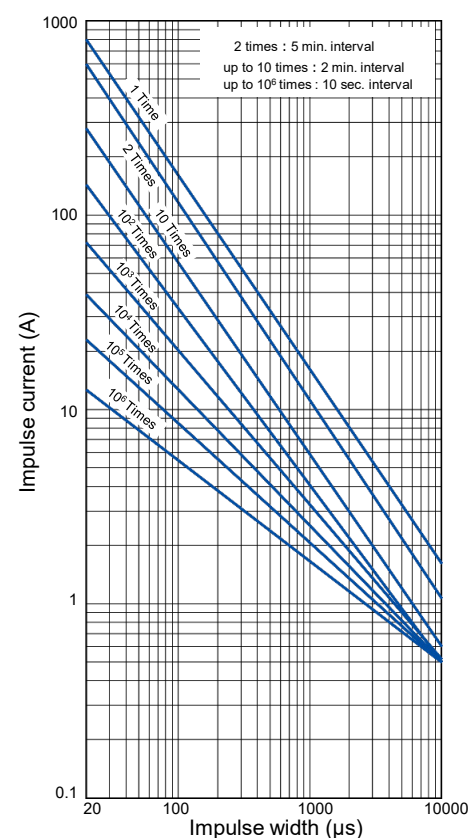

## Ratings and characteristics

●Operating temperature range : -40 to 85 °C

●Storage temperature range : -40 to 125 °C

| Part No.   | Varistor voltage<br>at 1 mA | Maximum<br>allowable voltage |     | Clamping<br>voltage<br>(max.)<br>**Ip | Rated<br>power | Maximum energy |        | Maximum<br>peak current<br>(8/20 μs) |      | Capacitance<br>(max.)<br>at 1 kHz |
|------------|-----------------------------|------------------------------|-----|---------------------------------------|----------------|----------------|--------|--------------------------------------|------|-----------------------------------|
|            |                             |                              |     |                                       |                |                |        |                                      |      |                                   |
|            |                             |                              |     |                                       |                |                |        |                                      |      |                                   |
| (V)        | AC rms<br>(V)               | DC<br>(V)                    | (V) | (W)                                   | (10/1000 μs)   | (2 ms)         | 1 time | 2 times                              | (pF) |                                   |
|            |                             |                              |     |                                       | (J)            | (J)            | (A)    | (A)                                  |      |                                   |
| ERZV07D180 | 18(16 to 20)                | 11                           | 14  | 36                                    | 0.02           | 1.1            | 0.9    | 500                                  | 250  | 3800                              |
| ERZV07D220 | 22(20 to 24)                | 14                           | 18  | 43                                    | 0.02           | 1.3            | 1.1    | 500                                  | 250  | 3600                              |
| ERZV07D270 | 27(24 to 30)                | 17                           | 22  | 53                                    | 0.02           | 1.6            | 1.3    | 500                                  | 250  | 3400                              |
| ERZV07D330 | 33(30 to 36)                | 20                           | 26  | 65                                    | 0.02           | 2.0            | 1.6    | 500                                  | 250  | 2900                              |
| ERZV07D390 | 39(35 to 43)                | 25                           | 31  | 77                                    | 0.02           | 2.4            | 1.9    | 500                                  | 250  | 1600                              |
| ERZV07D470 | 47(42 to 52)                | 30                           | 38  | 93                                    | 0.02           | 2.8            | 2.3    | 500                                  | 250  | 1550                              |
| ERZV07D560 | 56(50 to 62)                | 35                           | 45  | 110                                   | 0.02           | 3.4            | 2.7    | 500                                  | 250  | 1500                              |
| ERZV07D680 | 68(61 to 75)                | 40                           | 56  | 135                                   | 0.02           | 4.1            | 3.3    | 500                                  | 250  | 1200                              |
| ERZV07D820 | 82(74 to 90)                | 50                           | 65  | 135                                   | 0.25           | 7              | 5      | 1750                                 | 1250 | 810                               |
| ERZV07D101 | 100(90 to 110)              | 60                           | 85  | 165                                   | 0.25           | 8.5            | 6      | 1750                                 | 1250 | 700                               |
| ERZV07D121 | 120(108 to 132)             | 75                           | 100 | 200                                   | 0.25           | 10             | 7      | 1750                                 | 1250 | 590                               |
| ERZV07D151 | 150(135 to 165)             | 95                           | 125 | 250                                   | 0.25           | 13             | 9      | 1750                                 | 1250 | 500                               |

★The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)

|            |                 |     |     |     |      |      |      |      |      |     |
|------------|-----------------|-----|-----|-----|------|------|------|------|------|-----|
| ERZV07D201 | 200(185 to 225) | 130 | 170 | 340 | 0.25 | 17.5 | 12.5 | 1750 | 1250 | 200 |
| ERZV07D221 | 220(198 to 242) | 140 | 180 | 360 | 0.25 | 19   | 13.5 | 1750 | 1250 | 190 |
| ERZV07D241 | 240(216 to 264) | 150 | 200 | 395 | 0.25 | 21   | 15   | 1750 | 1250 | 170 |
| ERZV07D271 | 270(247 to 303) | 175 | 225 | 455 | 0.25 | 24   | 17   | 1750 | 1250 | 150 |
| ERZV07D331 | 330(297 to 363) | 210 | 270 | 545 | 0.25 | 28   | 20   | 1750 | 1250 | 130 |
| ERZV07D361 | 360(324 to 396) | 230 | 300 | 595 | 0.25 | 32   | 23   | 1750 | 1250 | 130 |
| ERZV07D391 | 390(351 to 429) | 250 | 320 | 650 | 0.25 | 35   | 25   | 1750 | 1250 | 130 |
| ERZV07D431 | 430(387 to 473) | 275 | 350 | 710 | 0.25 | 40   | 27.5 | 1750 | 1250 | 120 |
| ERZV07D471 | 470(423 to 517) | 300 | 385 | 775 | 0.25 | 42   | 30   | 1750 | 1250 | 100 |
| ERZV07D511 | 510(459 to 561) | 320 | 410 | 845 | 0.25 | 45   | 32   | 1750 | 1250 | 90* |


\*Measured at 1 MHz    \*\*Ip Measuring current of clamping voltage 180 to 680 : 2.5 A, 820 to 511 : 10 A

## Dimensions in mm (not to scale)

| Part No.   | Unit : mm |        |       |        |       |
|------------|-----------|--------|-------|--------|-------|
|            | D max.    | T max. | W±1.0 | H max. | L±1.0 |
| ERZV07D180 | 8.5       | 4.5    | 5.0   | 11.5   | 1.3   |
| ERZV07D220 | 8.5       | 4.6    | 5.0   | 11.5   | 1.4   |
| ERZV07D270 | 8.5       | 4.7    | 5.0   | 11.5   | 1.5   |
| ERZV07D330 | 8.5       | 4.9    | 5.0   | 11.5   | 1.7   |
| ERZV07D390 | 8.5       | 4.8    | 5.0   | 11.5   | 1.6   |
| ERZV07D470 | 8.5       | 4.9    | 5.0   | 11.5   | 1.7   |
| ERZV07D560 | 8.5       | 5.0    | 5.0   | 11.5   | 1.8   |
| ERZV07D680 | 8.5       | 5.2    | 5.0   | 11.5   | 2.0   |
| ERZV07D820 | 8.5       | 4.1    | 5.0   | 11.5   | 1.4   |
| ERZV07D101 | 8.5       | 4.3    | 5.0   | 11.5   | 1.6   |
| ERZV07D121 | 8.5       | 4.5    | 5.0   | 11.5   | 1.8   |
| ERZV07D151 | 8.5       | 4.8    | 5.0   | 11.5   | 2.1   |

★The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)


|            |     |     |     |      |     |
|------------|-----|-----|-----|------|-----|
| ERZV07D201 | 8.5 | 4.4 | 5.0 | 11.5 | 1.7 |
| ERZV07D221 | 8.5 | 4.5 | 5.0 | 11.5 | 1.8 |
| ERZV07D241 | 8.5 | 4.6 | 5.0 | 11.5 | 1.9 |
| ERZV07D271 | 8.5 | 4.8 | 5.0 | 11.5 | 2.1 |
| ERZV07D331 | 8.5 | 5.1 | 5.0 | 11.5 | 2.4 |
| ERZV07D361 | 8.5 | 5.3 | 5.0 | 11.5 | 2.5 |
| ERZV07D391 | 8.5 | 5.4 | 5.0 | 11.5 | 2.7 |
| ERZV07D431 | 8.5 | 5.6 | 5.0 | 11.5 | 2.9 |
| ERZV07D471 | 8.5 | 5.8 | 5.0 | 11.5 | 3.1 |
| ERZV07D511 | 8.5 | 6.0 | 5.0 | 11.5 | 3.3 |

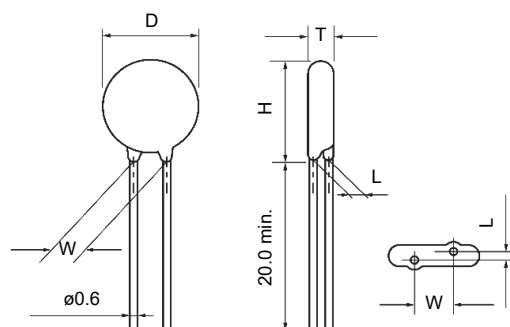


## Typical characteristics

### Voltage vs. Current

ERZV07D180 to ERZV07D680

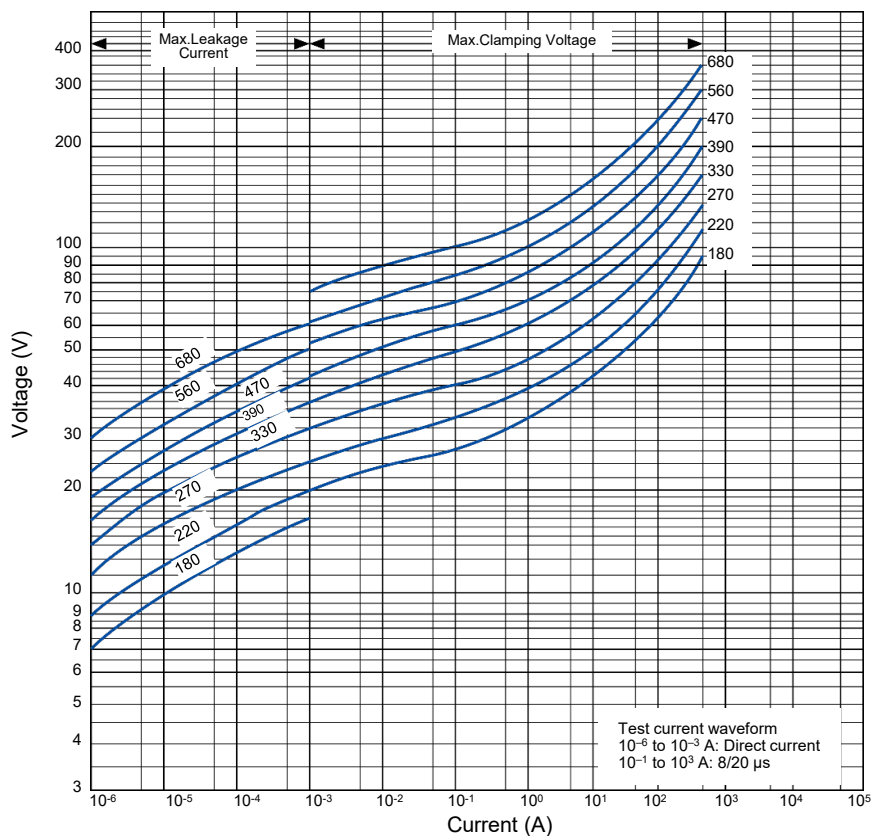


ERZV07D820 to ERZV07D511

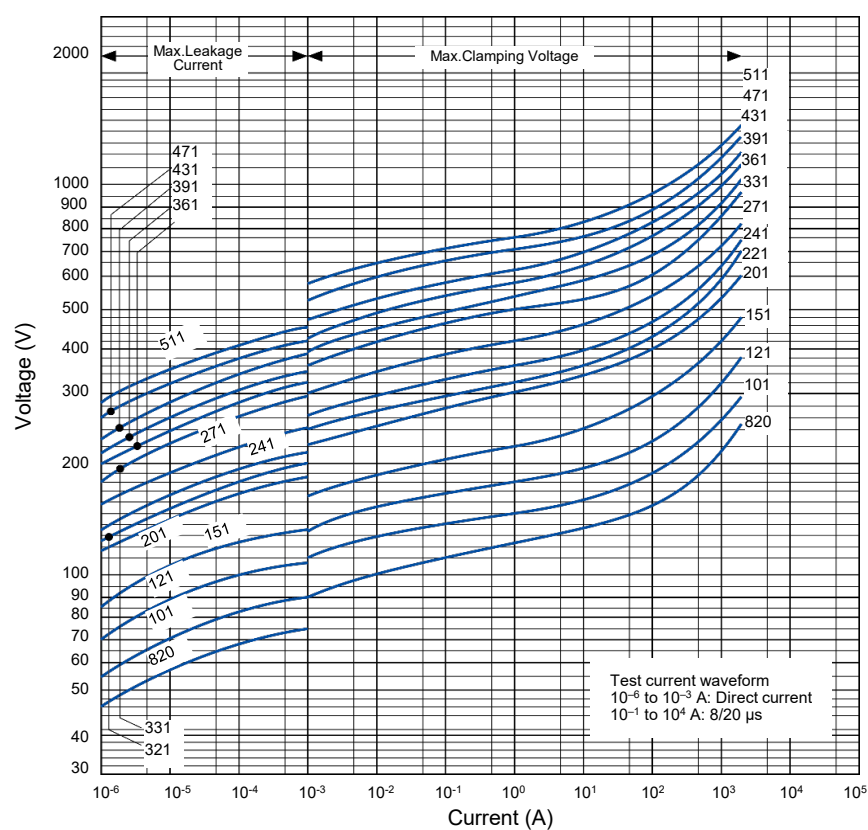


### Impulse Derating (Relation between impulse width and impulse current multiple)

ERZV07D180 to ERZV07D680

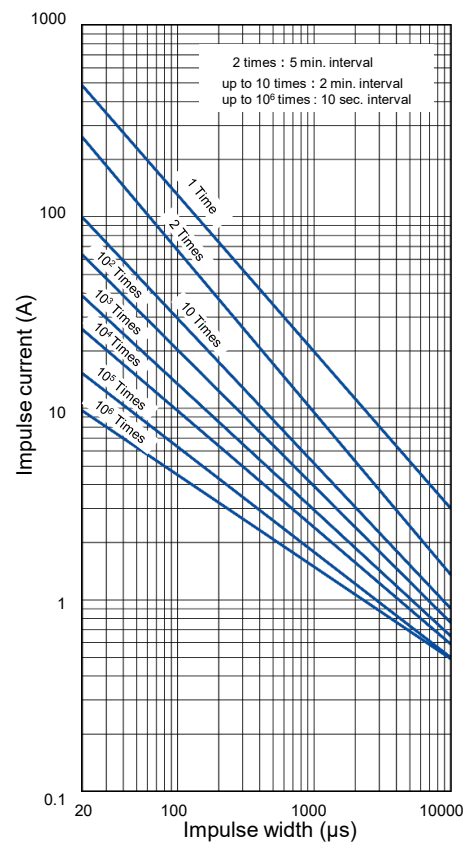

ERZV07D820 to ERZV07D511

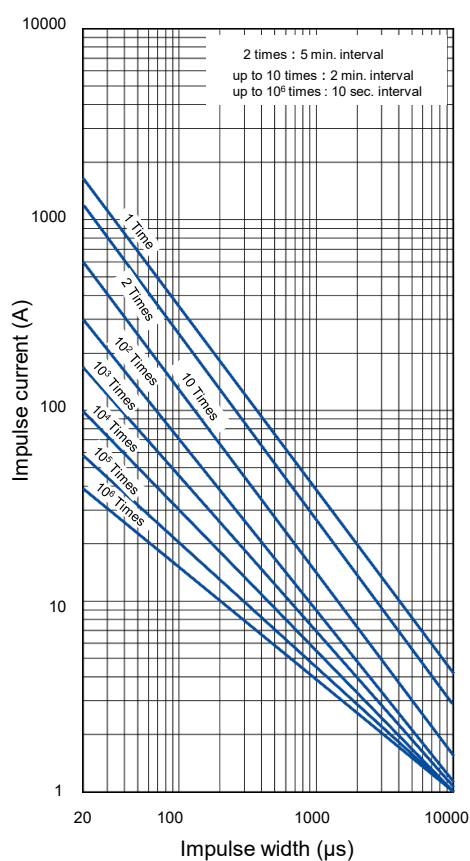

## Ratings and characteristics

●Operating temperature range : -40 to 85 °C

●Storage temperature range : -40 to 125 °C

| Part No.   | Varistor voltage<br>at 1 mA | Maximum<br>allowable voltage |     | Clamping<br>voltage<br>(max.)<br>**Ip | Rated<br>power | Maximum energy |        | Maximum<br>peak current<br>(8/20 μs) |      | Capacitance<br>(max.)<br>at 1 kHz |
|------------|-----------------------------|------------------------------|-----|---------------------------------------|----------------|----------------|--------|--------------------------------------|------|-----------------------------------|
|            |                             |                              |     |                                       |                |                |        |                                      |      |                                   |
|            |                             |                              |     |                                       |                |                |        |                                      |      |                                   |
| (V)        | AC rms<br>(V)               | DC<br>(V)                    | (V) | (W)                                   | (10/1000 μs)   | (2 ms)         | 1 time | 2 times                              | (pF) |                                   |
|            |                             |                              |     |                                       | (J)            | (J)            | (A)    | (A)                                  |      |                                   |
| ERZV09D180 | 18(16 to 20)                | 11                           | 14  | 36                                    | 0.05           | 2.6            | 2.2    | 1000                                 | 500  | 16000                             |
| ERZV09D220 | 22(20 to 24)                | 14                           | 18  | 43                                    | 0.05           | 3.2            | 2.6    | 1000                                 | 500  | 11000                             |
| ERZV09D270 | 27(24 to 30)                | 17                           | 22  | 53                                    | 0.05           | 3.9            | 3.2    | 1000                                 | 500  | 8000                              |
| ERZV09D330 | 33(30 to 36)                | 20                           | 26  | 65                                    | 0.05           | 4.8            | 4.0    | 1000                                 | 500  | 6300                              |
| ERZV09D390 | 39(35 to 43)                | 25                           | 31  | 77                                    | 0.05           | 5.6            | 4.7    | 1000                                 | 500  | 5200                              |
| ERZV09D470 | 47(42 to 52)                | 30                           | 38  | 93                                    | 0.05           | 6.8            | 5.6    | 1000                                 | 500  | 4600                              |
| ERZV09D560 | 56(50 to 62)                | 35                           | 45  | 110                                   | 0.05           | 8.1            | 6.7    | 1000                                 | 500  | 3750                              |
| ERZV09D680 | 68(61 to 75)                | 40                           | 56  | 135                                   | 0.05           | 9.8            | 8.2    | 1000                                 | 500  | 2800                              |
| ERZV09D820 | 82(74 to 90)                | 50                           | 65  | 135                                   | 0.4            | 14.0           | 10     | 3500                                 | 2500 | 2000                              |
| ERZV09D101 | 100(90 to 110)              | 60                           | 85  | 165                                   | 0.4            | 17             | 12     | 3500                                 | 2500 | 1700                              |
| ERZV09D121 | 120(108 to 132)             | 75                           | 100 | 200                                   | 0.4            | 20             | 14.5   | 3500                                 | 2500 | 1400                              |
| ERZV09D151 | 150(135 to 165)             | 95                           | 125 | 250                                   | 0.4            | 25             | 18     | 3500                                 | 2500 | 1100                              |

★The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)

|            |                 |     |     |     |     |    |      |      |      |     |
|------------|-----------------|-----|-----|-----|-----|----|------|------|------|-----|
| ERZV09D201 | 200(185 to 225) | 130 | 170 | 340 | 0.4 | 35 | 25   | 3500 | 2500 | 430 |
| ERZV09D221 | 220(198 to 242) | 140 | 180 | 360 | 0.4 | 39 | 27.5 | 3500 | 2500 | 410 |
| ERZV09D241 | 240(216 to 264) | 150 | 200 | 395 | 0.4 | 42 | 30   | 3500 | 2500 | 380 |
| ERZV09D271 | 270(247 to 303) | 175 | 225 | 455 | 0.4 | 49 | 35   | 3500 | 2500 | 350 |
| ERZV09D331 | 330(297 to 363) | 210 | 270 | 545 | 0.4 | 58 | 42   | 3500 | 2500 | 300 |
| ERZV09D361 | 360(324 to 396) | 230 | 300 | 595 | 0.4 | 65 | 45   | 3500 | 2500 | 300 |
| ERZV09D391 | 390(351 to 429) | 250 | 320 | 650 | 0.4 | 70 | 50   | 3500 | 2500 | 300 |
| ERZV09D431 | 430(387 to 473) | 275 | 350 | 710 | 0.4 | 80 | 55   | 3500 | 2500 | 270 |
| ERZV09D471 | 470(423 to 517) | 300 | 385 | 775 | 0.4 | 85 | 60   | 3500 | 2500 | 230 |
| ERZV09D511 | 510(459 to 561) | 320 | 410 | 845 | 0.4 | 92 | 67   | 3500 | 2500 | 210 |


\*Ip Measuring current of clamping voltage 180 to 680 : 5 A, 820 to 511 : 25 A

## Dimensions in mm (not to scale)

| Part No.   | Unit : mm |        |       |        |       |
|------------|-----------|--------|-------|--------|-------|
|            | D max.    | T max. | W±1.0 | H max. | L±1.0 |
| ERZV09D180 | 11.5      | 3.8    | 5.0   | 14.0   | 1.3   |
| ERZV09D220 | 11.5      | 4.0    | 5.0   | 14.0   | 1.4   |
| ERZV09D270 | 11.5      | 4.2    | 5.0   | 14.0   | 1.5   |
| ERZV09D330 | 11.5      | 4.5    | 5.0   | 14.0   | 1.7   |
| ERZV09D390 | 11.5      | 4.0    | 5.0   | 14.0   | 1.7   |
| ERZV09D470 | 11.5      | 4.2    | 5.0   | 14.0   | 1.8   |
| ERZV09D560 | 11.5      | 4.4    | 5.0   | 14.0   | 1.9   |
| ERZV09D680 | 11.5      | 4.5    | 5.0   | 14.0   | 2.2   |
| ERZV09D820 | 11.5      | 3.8    | 5.0   | 14.0   | 1.6   |
| ERZV09D101 | 11.5      | 3.9    | 5.0   | 14.0   | 1.8   |
| ERZV09D121 | 11.5      | 4.1    | 5.0   | 14.0   | 2.0   |
| ERZV09D151 | 11.5      | 4.4    | 5.0   | 14.0   | 2.2   |

★The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)


|            |      |     |     |      |     |
|------------|------|-----|-----|------|-----|
| ERZV09D201 | 11.5 | 4.1 | 5.0 | 14.0 | 1.7 |
| ERZV09D221 | 11.5 | 4.2 | 5.0 | 14.0 | 1.8 |
| ERZV09D241 | 11.5 | 4.3 | 5.0 | 14.0 | 1.9 |
| ERZV09D271 | 11.5 | 4.5 | 5.0 | 14.0 | 2.0 |
| ERZV09D331 | 11.5 | 4.8 | 5.0 | 14.0 | 2.3 |
| ERZV09D361 | 11.5 | 5.0 | 5.0 | 14.0 | 2.5 |
| ERZV09D391 | 11.5 | 5.1 | 5.0 | 14.0 | 2.6 |
| ERZV09D431 | 11.5 | 5.3 | 5.0 | 14.0 | 2.8 |
| ERZV09D471 | 11.5 | 5.6 | 5.0 | 14.0 | 3.1 |
| ERZV09D511 | 11.5 | 5.8 | 5.0 | 14.0 | 3.2 |

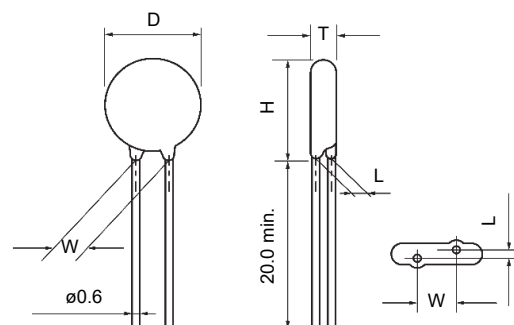

## Typical characteristics


### Voltage vs. Current

ERZV09D180 to ERZV09D680

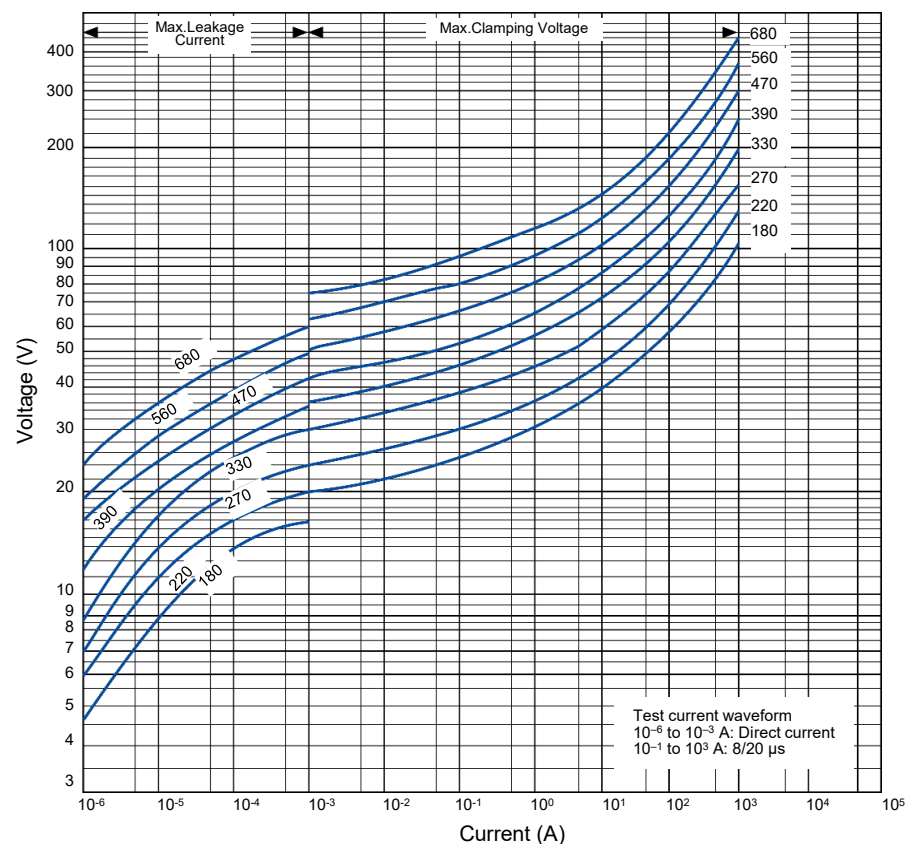


### Impulse Derating (Relation between impulse width and impulse current multiple)


ERZV09D180 to ERZV09D680

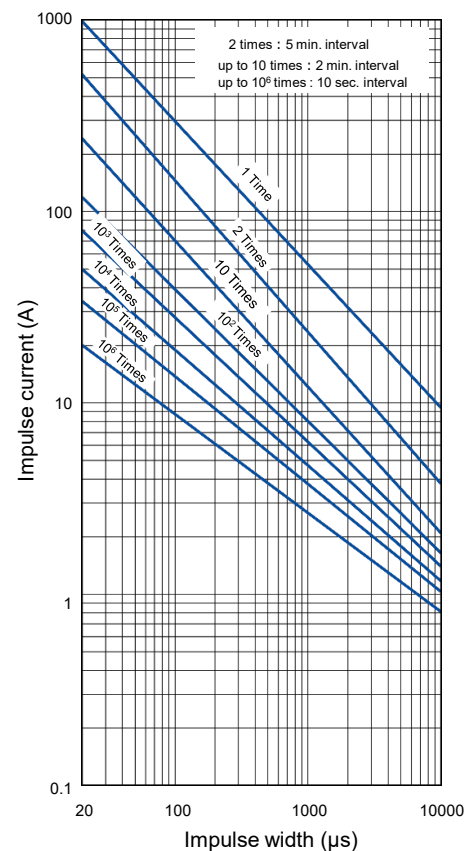

ERZV09D820 to ERZV09D511

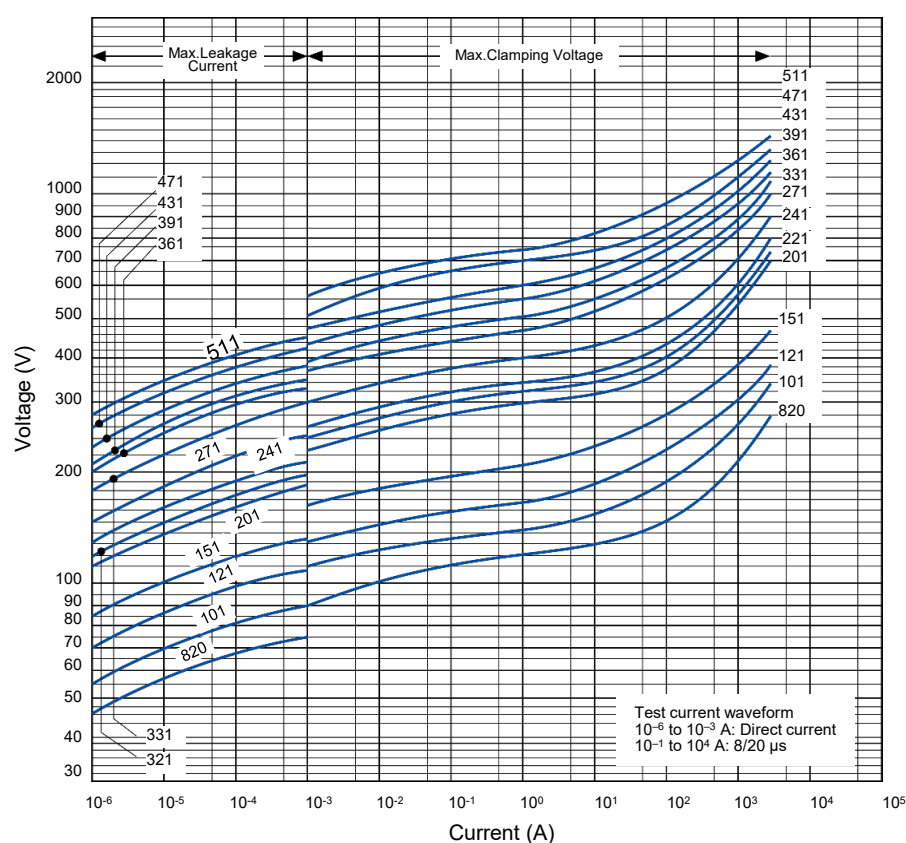

ERZV09D820 to ERZV09D511

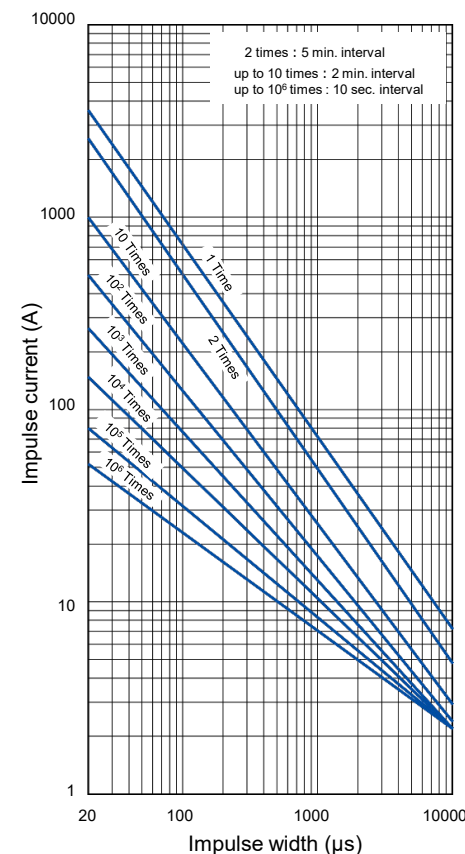

## Ratings and characteristics

●Operating temperature range : -40 to 85 °C

●Storage temperature range : -40 to 125 °C

| Part No.   | Varistor voltage at 1 mA | Maximum allowable voltage |        | Clamping voltage (max.)<br>**Ip | Rated power | Maximum energy      |               | Maximum peak current (8/20 µs) |                | Capacitance (max.) at 1 kHz |
|------------|--------------------------|---------------------------|--------|---------------------------------|-------------|---------------------|---------------|--------------------------------|----------------|-----------------------------|
|            |                          |                           |        |                                 |             |                     |               |                                |                |                             |
|            |                          | AC rms (V)                | DC (V) |                                 |             | (10/1000 µs)<br>(J) | (2 ms)<br>(J) | 1 time<br>(A)                  | 2 times<br>(A) |                             |
| ERZV10D180 | 18(16 to 20)             | 11                        | 14     | 36                              | 0.05        | 2.6                 | 2.2           | 1000                           | 500            | 16000                       |
| ERZV10D220 | 22(20 to 24)             | 14                        | 18     | 43                              | 0.05        | 3.2                 | 2.6           | 1000                           | 500            | 11000                       |
| ERZV10D270 | 27(24 to 30)             | 17                        | 22     | 53                              | 0.05        | 3.9                 | 3.2           | 1000                           | 500            | 8000                        |
| ERZV10D330 | 33(30 to 36)             | 20                        | 26     | 65                              | 0.05        | 4.8                 | 4.0           | 1000                           | 500            | 6300                        |
| ERZV10D390 | 39(35 to 43)             | 25                        | 31     | 77                              | 0.05        | 5.6                 | 4.7           | 1000                           | 500            | 5200                        |
| ERZV10D470 | 47(42 to 52)             | 30                        | 38     | 93                              | 0.05        | 6.8                 | 5.6           | 1000                           | 500            | 4600                        |
| ERZV10D560 | 56(50 to 62)             | 35                        | 45     | 110                             | 0.05        | 8.1                 | 6.7           | 1000                           | 500            | 3750                        |
| ERZV10D680 | 68(61 to 75)             | 40                        | 56     | 135                             | 0.05        | 9.8                 | 8.2           | 1000                           | 500            | 2800                        |
| ERZV10D820 | 82(74 to 90)             | 50                        | 65     | 135                             | 0.4         | 14                  | 10            | 3500                           | 2500           | 2000                        |
| ERZV10D101 | 100(90 to 110)           | 60                        | 85     | 165                             | 0.4         | 17                  | 12            | 3500                           | 2500           | 1700                        |
| ERZV10D121 | 120(108 to 132)          | 75                        | 100    | 200                             | 0.4         | 20                  | 14.5          | 3500                           | 2500           | 1400                        |
| ERZV10D151 | 150(135 to 165)          | 95                        | 125    | 250                             | 0.4         | 25                  | 18            | 3500                           | 2500           | 1100                        |

★ The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)

|              |                    |      |      |      |      |     |        |      |      |        |
|--------------|--------------------|------|------|------|------|-----|--------|------|------|--------|
| ERZV10D201   | 200(185 to 225)    | 130  | 170  | 340  | 0.4  | 35  | 25     | 3500 | 2500 | 430    |
| ERZV10D221   | 220(198 to 242)    | 140  | 180  | 360  | 0.4  | 39  | 27.5   | 3500 | 2500 | 410    |
| ERZV10D241   | 240(216 to 264)    | 150  | 200  | 395  | 0.4  | 42  | 30     | 3500 | 2500 | 380    |
| ERZV10D271   | 270(247 to 303)    | 175  | 225  | 455  | 0.4  | 49  | 35     | 3500 | 2500 | 350    |
| ERZV10D331   | 330(297 to 363)    | 210  | 270  | 545  | 0.4  | 58  | 42     | 3500 | 2500 | 300    |
| ERZV10D361   | 360(324 to 396)    | 230  | 300  | 595  | 0.4  | 65  | 45     | 3500 | 2500 | 300    |
| ERZV10D391   | 390(351 to 429)    | 250  | 320  | 650  | 0.4  | 70  | 50     | 3500 | 2500 | 300    |
| ERZV10D431   | 430(387 to 473)    | 275  | 350  | 710  | 0.4  | 80  | 55     | 3500 | 2500 | 270    |
| ERZV10D471   | 470(423 to 517)    | 300  | 385  | 775  | 0.4  | 85  | 60     | 3500 | 2500 | 230    |
| ERZV10D511   | 510(459 to 561)    | 320  | 410  | 845  | 0.4  | 92  | 67     | 3500 | 2500 | 210    |
| ERZV10D561   | 560(504 to 616)    | 350  | 450  | 930  | 0.4  | 92  | 67     | 3500 | 2500 | 200    |
| ERZV10D621   | 620(558 to 682)    | 385  | 505  | 1025 | 0.4  | 92  | 67     | 3500 | 2500 | 190    |
| ERZV10D681   | 680(612 to 748)    | 420  | 560  | 1120 | 0.4  | 92  | 67     | 3500 | 2500 | 170    |
| ERZV10D751   | 750(675 to 825)    | 460  | 615  | 1240 | 0.4  | 100 | 70     | 3500 | 2500 | 160    |
| ERZV10D821   | 820(738 to 902)    | 510  | 670  | 1355 | 0.4  | 110 | 80     | 3500 | 2500 | 140    |
| ERZV10D911   | 910(819 to 1001)   | 550  | 745  | 1500 | 0.4  | 130 | 90     | 3500 | 2500 | 120    |
| ERZV10D102   | 1000(900 to 1100)  | 625  | 825  | 1650 | 0.4  | 140 | 100    | 3500 | 2500 | 110    |
| ERZV10D112   | 1100(990 to 1210)  | 680  | 895  | 1815 | 0.4  | 155 | 110    | 3500 | 2500 | 110    |
| ERZV10D182CS | 1800(1700 to 1980) | 1000 | 1465 | 2970 | 0.4* | 247 | 183*** | 3500 | 2500 | ***70* |

\*Measured at 1 MHz    \*\*Ip Measuring current of clamping voltage 180 to 680 : 5 A, 820 to 182 : 25 A

## Dimensions in mm (not to scale)

Unit : mm


| Part No.   | D max. | T max. | W±1.0 | H max. | L±1.0 |
|------------|--------|--------|-------|--------|-------|
| ERZV10D180 | 11.5   | 4.6    | 7.5   | 14.5   | 1.3   |
| ERZV10D220 | 11.5   | 4.7    | 7.5   | 14.5   | 1.4   |
| ERZV10D270 | 11.5   | 4.8    | 7.5   | 14.5   | 1.5   |
| ERZV10D330 | 11.5   | 5.0    | 7.5   | 14.5   | 1.7   |
| ERZV10D390 | 11.5   | 4.9    | 7.5   | 14.5   | 1.6   |
| ERZV10D470 | 11.5   | 5.0    | 7.5   | 14.5   | 1.7   |
| ERZV10D560 | 11.5   | 5.1    | 7.5   | 14.5   | 1.8   |
| ERZV10D680 | 11.5   | 5.3    | 7.5   | 14.5   | 2.0   |
| ERZV10D820 | 11.5   | 4.5    | 7.5   | 14.5   | 1.6   |
| ERZV10D101 | 11.5   | 4.7    | 7.5   | 14.5   | 1.8   |
| ERZV10D121 | 11.5   | 4.9    | 7.5   | 14.5   | 2.0   |
| ERZV10D151 | 11.5   | 5.2    | 7.5   | 14.5   | 2.3   |

★ The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)


|            |      |     |     |      |     |
|------------|------|-----|-----|------|-----|
| ERZV10D201 | 11.5 | 4.8 | 7.5 | 14.5 | 1.9 |
| ERZV10D221 | 11.5 | 4.9 | 7.5 | 14.5 | 2.0 |
| ERZV10D241 | 11.5 | 5.0 | 7.5 | 14.5 | 2.1 |
| ERZV10D271 | 11.5 | 5.2 | 7.5 | 14.5 | 2.3 |
| ERZV10D331 | 11.5 | 5.5 | 7.5 | 14.5 | 2.6 |
| ERZV10D361 | 11.5 | 5.7 | 7.5 | 14.5 | 2.8 |
| ERZV10D391 | 11.5 | 5.8 | 7.5 | 14.5 | 2.9 |
| ERZV10D431 | 11.5 | 6.0 | 7.5 | 14.5 | 3.1 |
| ERZV10D471 | 11.5 | 6.2 | 7.5 | 14.5 | 3.3 |
| ERZV10D511 | 11.5 | 6.4 | 7.5 | 14.5 | 3.5 |
| ERZV10D561 | 12.5 | 6.7 | 7.5 | 15.5 | 3.8 |
| ERZV10D621 | 12.5 | 7.1 | 7.5 | 15.5 | 4.2 |
| ERZV10D681 | 12.5 | 7.4 | 7.5 | 15.5 | 4.5 |
| ERZV10D751 | 12.5 | 7.8 | 7.5 | 15.5 | 4.9 |
| ERZV10D821 | 12.5 | 8.1 | 7.5 | 15.5 | 5.2 |
| ERZV10D911 | 12.5 | 8.6 | 7.5 | 15.5 | 5.7 |
| ERZV10D102 | 12.5 | 9.1 | 7.5 | 15.5 | 6.2 |
| ERZV10D112 | 12.5 | 9.7 | 7.5 | 15.5 | 6.8 |

|              |      |      |       |      |             |
|--------------|------|------|-------|------|-------------|
| ERZV10D182CS | 13.5 | 14.4 | 11.0* | 16.5 | 10.0 (±1.5) |
|--------------|------|------|-------|------|-------------|

\* W2

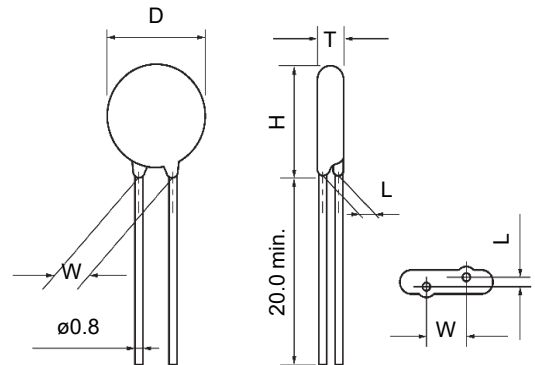


(ERZV10D182CS)

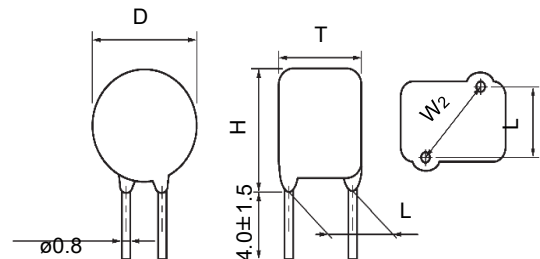

## Typical characteristics


### Voltage vs. Current

ERZV10D180 to ERZV10D680

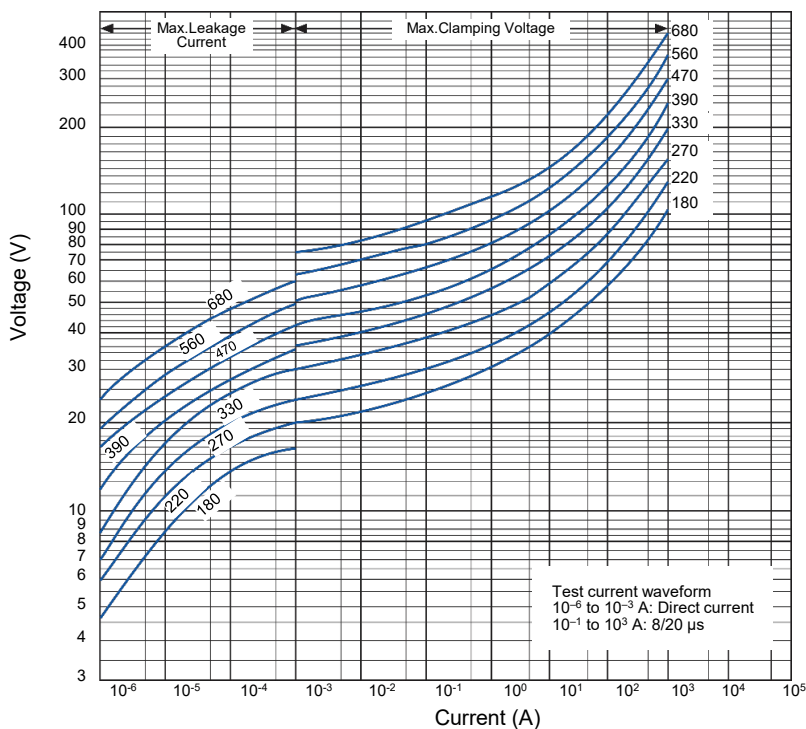

### Impulse Derating (Relation between impulse width and impulse current multiple)


ERZV10D180 to ERZV10D680

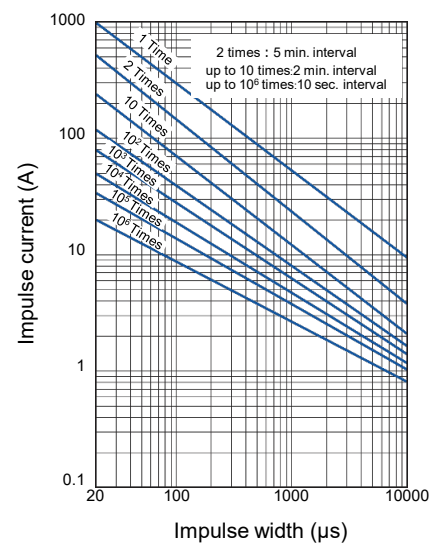


## Typical characteristics

### Voltage vs. Current

ERZV10D820 to ERZV10D511

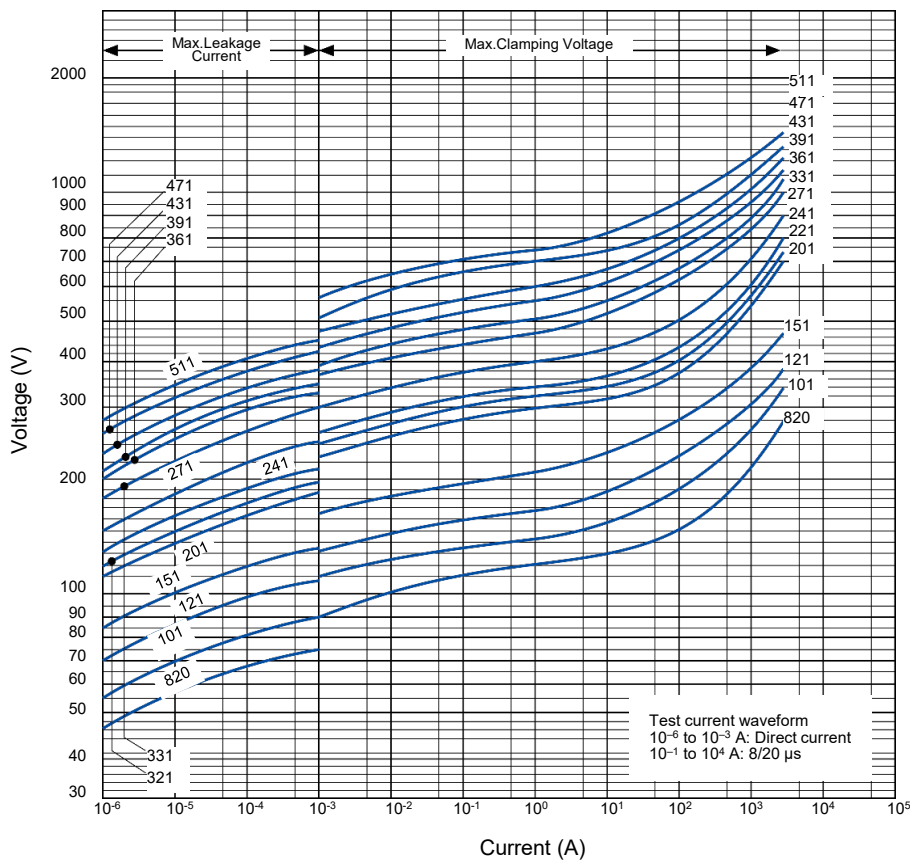


ERZV10D561 to ERZV10D182CS

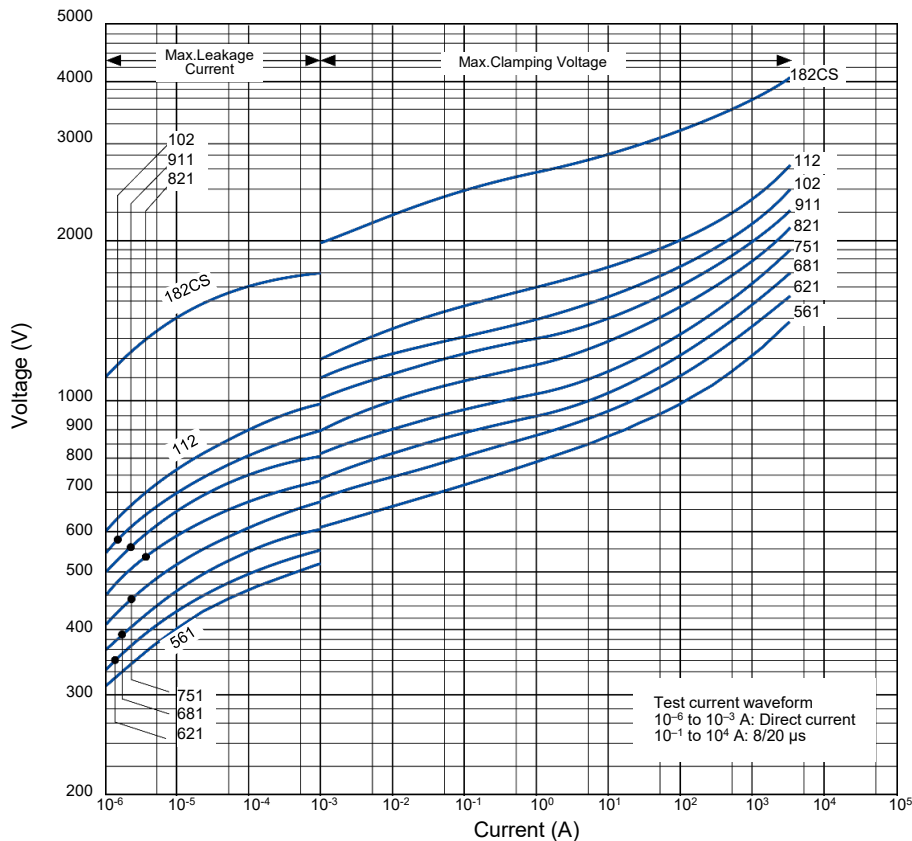


### Impulse Derating (Relation between impulse width and impulse current multiple)


ERZV10D820 to ERZV10D511

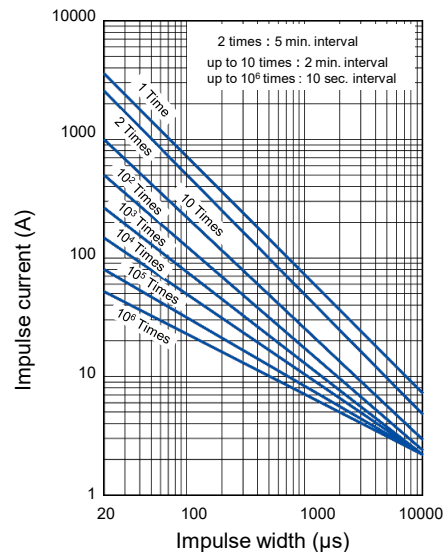

ERZV10D561 to ERZV10D112

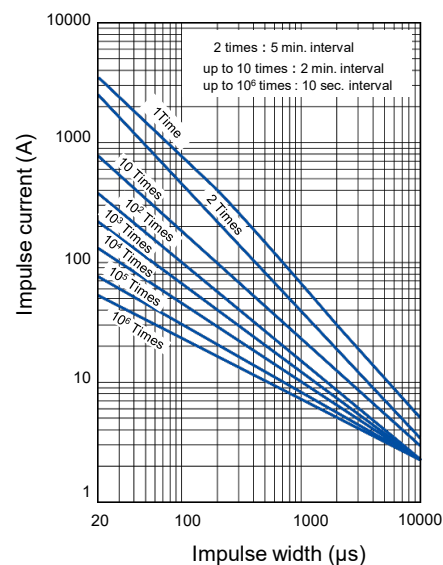

ERZV10D182CS

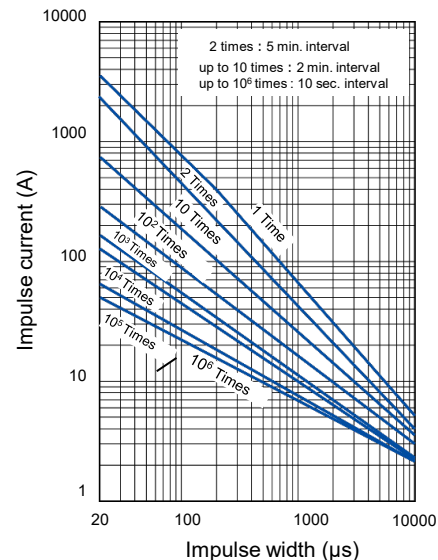

## Ratings and characteristics

●Operating temperature range : -40 to 85 °C

●Storage temperature range : -40 to 125 °C

| Part No.   | Varistor voltage at 1 mA | Maximum allowable voltage |        | Clamping voltage (max.)<br>**Ip | Rated power | Maximum energy      |               | Maximum peak current (8/20 µs) |                | Capacitance (max.) at 1 kHz |
|------------|--------------------------|---------------------------|--------|---------------------------------|-------------|---------------------|---------------|--------------------------------|----------------|-----------------------------|
|            |                          |                           |        |                                 |             |                     |               |                                |                |                             |
|            |                          | AC rms (V)                | DC (V) |                                 |             | (10/1000 µs)<br>(J) | (2 ms)<br>(J) | 1 time<br>(A)                  | 2 times<br>(A) |                             |
| ERZV14D180 | 18(16 to 20)             | 11                        | 14     | 36                              | 0.1         | 5.2                 | 4.3           | 2000                           | 1000           | 25000                       |
| ERZV14D220 | 22(20 to 24)             | 14                        | 18     | 43                              | 0.1         | 6.3                 | 5.3           | 2000                           | 1000           | 20000                       |
| ERZV14D270 | 27(24 to 30)             | 17                        | 22     | 53                              | 0.1         | 7.8                 | 6.5           | 2000                           | 1000           | 16000                       |
| ERZV14D330 | 33(30 to 36)             | 20                        | 26     | 65                              | 0.1         | 9.5                 | 7.9           | 2000                           | 1000           | 12200                       |
| ERZV14D390 | 39(35 to 43)             | 25                        | 31     | 77                              | 0.1         | 11                  | 9.4           | 2000                           | 1000           | 7000                        |
| ERZV14D470 | 47(42 to 52)             | 30                        | 38     | 93                              | 0.1         | 14                  | 11            | 2000                           | 1000           | 6750                        |
| ERZV14D560 | 56(50 to 62)             | 35                        | 45     | 110                             | 0.1         | 16                  | 13            | 2000                           | 1000           | 6500                        |
| ERZV14D680 | 68(61 to 75)             | 40                        | 56     | 135                             | 0.1         | 20                  | 16            | 2000                           | 1000           | 5500                        |
| ERZV14D820 | 82(74 to 90)             | 50                        | 65     | 135                             | 0.6         | 28                  | 20            | 6000                           | 5000           | 3700                        |
| ERZV14D101 | 100(90 to 110)           | 60                        | 85     | 165                             | 0.6         | 35                  | 25            | 6000                           | 5000           | 3200                        |
| ERZV14D121 | 120(108 to 132)          | 75                        | 100    | 200                             | 0.6         | 42                  | 30            | 6000                           | 5000           | 2700                        |
| ERZV14D151 | 150(135 to 165)          | 95                        | 125    | 250                             | 0.6         | 53                  | 37.5          | 6000                           | 5000           | 2200                        |

★ The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)

|              |                    |      |      |      |     |     |     |      |      |     |
|--------------|--------------------|------|------|------|-----|-----|-----|------|------|-----|
| ERZV14D201   | 200(185 to 225)    | 130  | 170  | 340  | 0.6 | 70  | 50  | 6000 | 5000 | 770 |
| ERZV14D221   | 220(198 to 242)    | 140  | 180  | 360  | 0.6 | 78  | 55  | 6000 | 5000 | 740 |
| ERZV14D241   | 240(216 to 264)    | 150  | 200  | 395  | 0.6 | 84  | 60  | 6000 | 5000 | 700 |
| ERZV14D271   | 270(247 to 303)    | 175  | 225  | 455  | 0.6 | 99  | 70  | 6000 | 5000 | 640 |
| ERZV14D331   | 330(297 to 363)    | 210  | 270  | 545  | 0.6 | 115 | 80  | 6000 | 4500 | 580 |
| ERZV14D361   | 360(324 to 396)    | 230  | 300  | 595  | 0.6 | 130 | 90  | 6000 | 4500 | 540 |
| ERZV14D391   | 390(351 to 429)    | 250  | 320  | 650  | 0.6 | 140 | 100 | 6000 | 4500 | 500 |
| ERZV14D431   | 430(387 to 473)    | 275  | 350  | 710  | 0.6 | 155 | 110 | 6000 | 4500 | 450 |
| ERZV14D471   | 470(423 to 517)    | 300  | 385  | 775  | 0.6 | 175 | 125 | 6000 | 4500 | 400 |
| ERZV14D511   | 510(459 to 561)    | 320  | 410  | 845  | 0.6 | 190 | 136 | 6000 | 4500 | 350 |
| ERZV14D561   | 560(504 to 616)    | 350  | 450  | 930  | 0.6 | 190 | 136 | 5000 | 4500 | 340 |
| ERZV14D621   | 620(558 to 682)    | 385  | 505  | 1025 | 0.6 | 190 | 136 | 5000 | 4500 | 330 |
| ERZV14D681   | 680(612 to 748)    | 420  | 560  | 1120 | 0.6 | 190 | 136 | 5000 | 4500 | 320 |
| ERZV14D751   | 750(675 to 825)    | 460  | 615  | 1240 | 0.6 | 210 | 150 | 5000 | 4500 | 310 |
| ERZV14D821   | 820(738 to 902)    | 510  | 670  | 1355 | 0.6 | 235 | 165 | 5000 | 4500 | 280 |
| ERZV14D911   | 910(819 to 1001)   | 550  | 745  | 1500 | 0.6 | 255 | 180 | 5000 | 4500 | 250 |
| ERZV14D102   | 1000(900 to 1100)  | 625  | 825  | 1650 | 0.6 | 280 | 200 | 5000 | 4500 | 230 |
| ERZV14D112   | 1100(990 to 1210)  | 680  | 895  | 1815 | 0.6 | 310 | 220 | 5000 | 4500 | 210 |
| ERZV14D182CS | 1800(1700 to 1980) | 1000 | 1465 | 2970 | 0.6 | 510 | 360 | 5000 | 4500 | 120 |

\*Ip Measuring current of clamping voltage 180 to 680 : 10 A, 820 to 182 : 50 A

## Dimensions in mm (not to scale)

Unit : mm


| Part No.   | D max. | T max. | W±1.0 | H max. | L±1.0 |
|------------|--------|--------|-------|--------|-------|
| ERZV14D180 | 15.5   | 4.6    | 7.5   | 18.5   | 1.3   |
| ERZV14D220 | 15.5   | 4.7    | 7.5   | 18.5   | 1.4   |
| ERZV14D270 | 15.5   | 4.8    | 7.5   | 18.5   | 1.5   |
| ERZV14D330 | 15.5   | 5.0    | 7.5   | 18.5   | 1.7   |
| ERZV14D390 | 15.5   | 4.9    | 7.5   | 18.5   | 1.6   |
| ERZV14D470 | 15.5   | 5.0    | 7.5   | 18.5   | 1.7   |
| ERZV14D560 | 15.5   | 5.1    | 7.5   | 18.5   | 1.8   |
| ERZV14D680 | 15.5   | 5.3    | 7.5   | 18.5   | 2.0   |
| ERZV14D820 | 15.5   | 4.5    | 7.5   | 18.5   | 1.6   |
| ERZV14D101 | 15.5   | 4.7    | 7.5   | 18.5   | 1.8   |
| ERZV14D121 | 15.5   | 4.9    | 7.5   | 18.5   | 2.0   |
| ERZV14D151 | 15.5   | 5.2    | 7.5   | 18.5   | 2.3   |

★ The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)


|            |      |     |     |      |     |
|------------|------|-----|-----|------|-----|
| ERZV14D201 | 15.5 | 4.8 | 7.5 | 18.5 | 1.9 |
| ERZV14D221 | 15.5 | 4.9 | 7.5 | 18.5 | 2.0 |
| ERZV14D241 | 15.5 | 5.0 | 7.5 | 18.5 | 2.1 |
| ERZV14D271 | 15.5 | 5.2 | 7.5 | 18.5 | 2.3 |
| ERZV14D331 | 15.5 | 5.5 | 7.5 | 18.5 | 2.6 |
| ERZV14D361 | 15.5 | 5.7 | 7.5 | 18.5 | 2.8 |
| ERZV14D391 | 15.5 | 5.8 | 7.5 | 18.5 | 2.9 |
| ERZV14D431 | 15.5 | 6.0 | 7.5 | 18.5 | 3.1 |
| ERZV14D471 | 15.5 | 6.2 | 7.5 | 18.5 | 3.3 |
| ERZV14D511 | 15.5 | 6.4 | 7.5 | 18.5 | 3.5 |
| ERZV14D561 | 16.0 | 6.7 | 7.5 | 19.0 | 3.8 |
| ERZV14D621 | 16.0 | 7.1 | 7.5 | 19.0 | 4.2 |
| ERZV14D681 | 16.0 | 7.4 | 7.5 | 19.0 | 4.5 |
| ERZV14D751 | 16.0 | 7.8 | 7.5 | 19.0 | 4.9 |
| ERZV14D821 | 16.0 | 8.1 | 7.5 | 19.0 | 5.2 |
| ERZV14D911 | 16.0 | 8.6 | 7.5 | 19.0 | 5.7 |
| ERZV14D102 | 16.0 | 9.1 | 7.5 | 19.0 | 6.2 |
| ERZV14D112 | 16.0 | 9.7 | 7.5 | 19.0 | 6.8 |

|              |      |       |       |      |             |
|--------------|------|-------|-------|------|-------------|
| ERZV14D182CS | 17.0 | 14.4* | 15.0* | 20.5 | 10.5 (±2.0) |
|--------------|------|-------|-------|------|-------------|

\* : W<sub>2</sub>

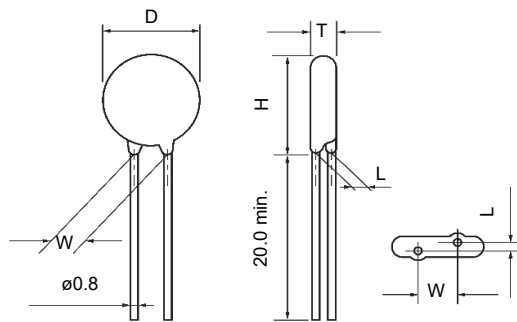


(ERZV14D182CS)

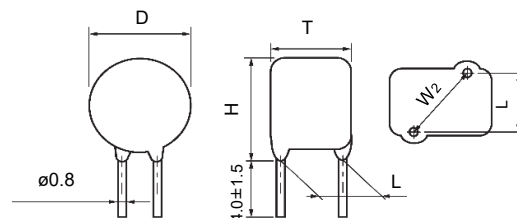

## Typical characteristics


## Voltage vs. Current

ERZV14D180 to ERZV14D680

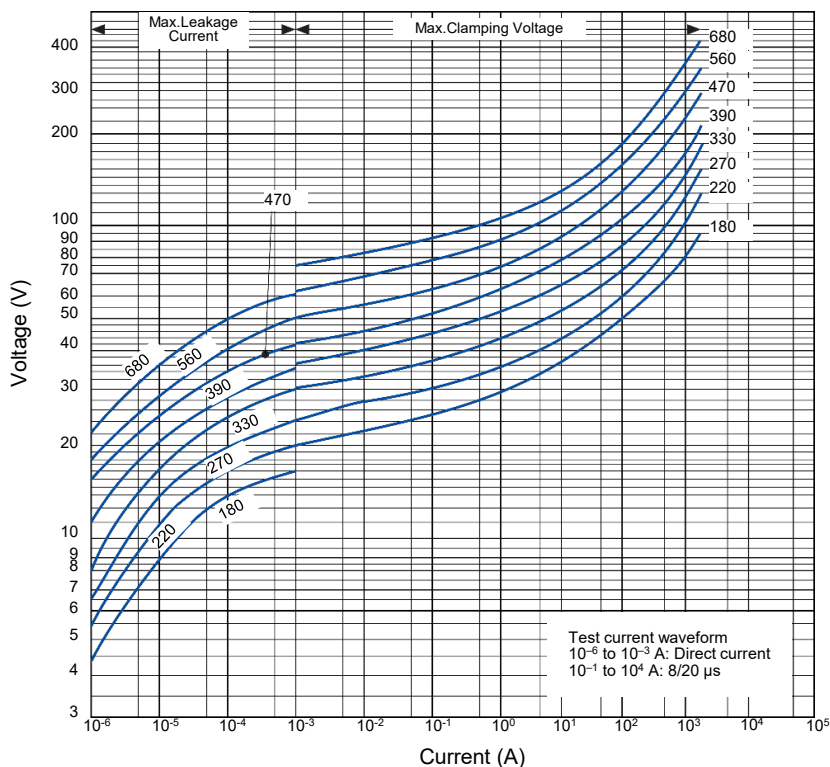

## Impulse Derating (Relation between impulse width and impulse current multiple)


ERZV14D180 to ERZV14D680

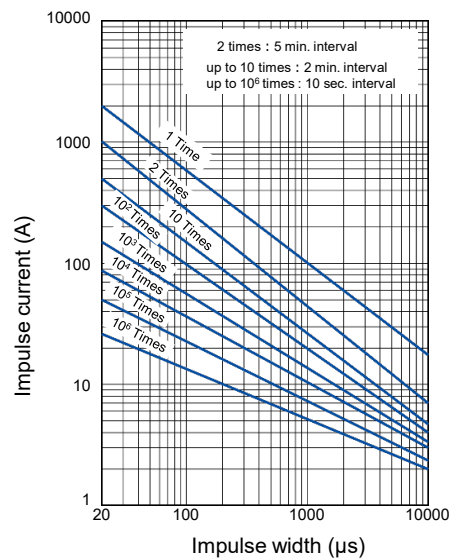

## Typical characteristics


### Voltage vs. Current

#### ERZV14D820 to ERZV14D511

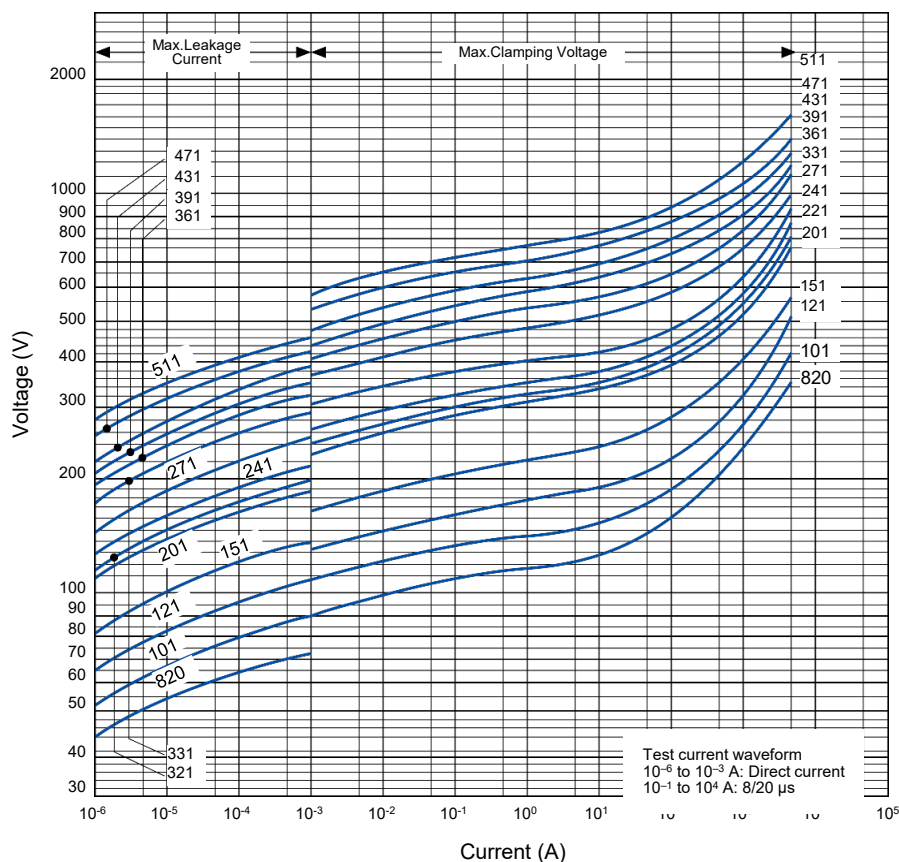


### Impulse Derating (Relation between impulse width and impulse current multiple)


#### ERZV14D820 to ERZV14D511

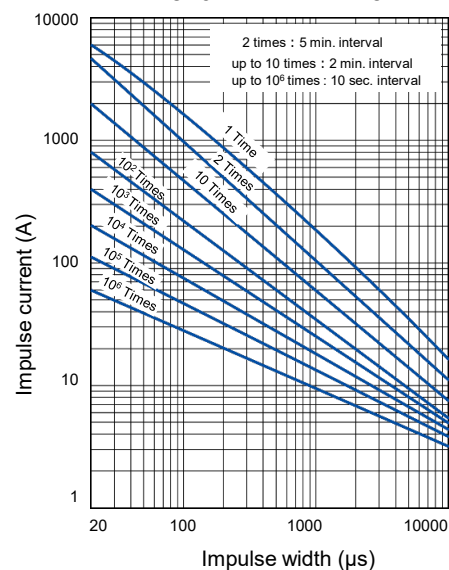


#### ERZV14D561 to ERZV14D112

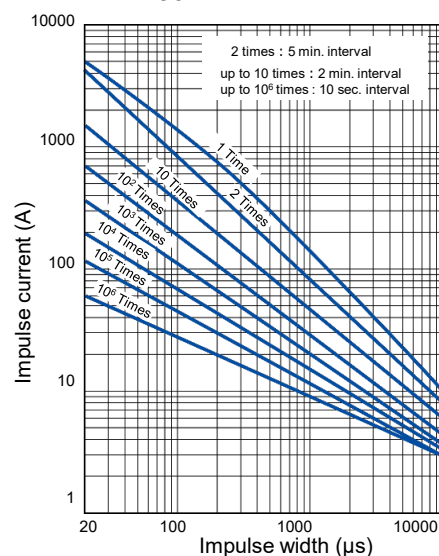

#### ERZV14D561 to ERZV14D182CS

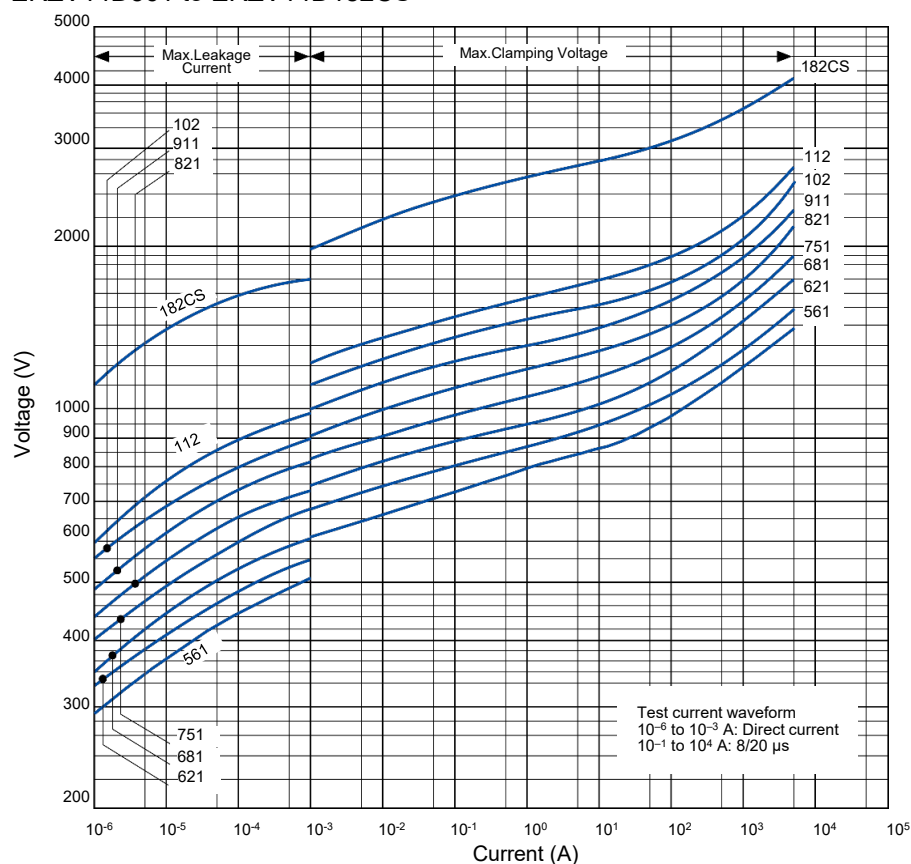

#### ERZV14D182CS

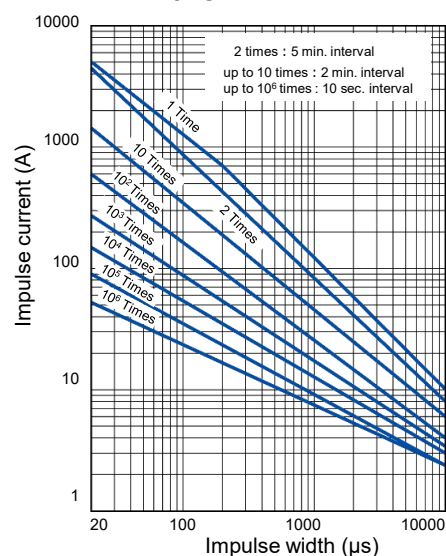

## Ratings and characteristics

●Operating temperature range : -40 to 85 °C

●Storage temperature range : -40 to 125 °C

| Part No.   | Varistor voltage at 1 mA | Maximum allowable voltage |        | Clamping voltage (max.)<br>**Ip | Rated power | Maximum energy      |               | Maximum peak current (8/20 μs) |                | Capacitance (max.) at 1 kHz |
|------------|--------------------------|---------------------------|--------|---------------------------------|-------------|---------------------|---------------|--------------------------------|----------------|-----------------------------|
|            |                          |                           |        |                                 |             |                     |               |                                |                |                             |
|            |                          | AC rms (V)                | DC (V) |                                 |             | (10/1000 μs)<br>(J) | (2 ms)<br>(J) | 1 time<br>(A)                  | 2 times<br>(A) |                             |
| ERZV20D180 | 18(16 to 20)             | 11                        | 14     | 36                              | 0.2         | 13                  | 12            | 3000                           | 2000           | 40000                       |
| ERZV20D220 | 22(20 to 24)             | 14                        | 18     | 43                              | 0.2         | 16                  | 14            | 3000                           | 2000           | 30000                       |
| ERZV20D270 | 27(24 to 30)             | 17                        | 22     | 53                              | 0.2         | 19                  | 17            | 3000                           | 2000           | 24500                       |
| ERZV20D330 | 33(30 to 36)             | 20                        | 26     | 65                              | 0.2         | 24                  | 21            | 3000                           | 2000           | 20000                       |
| ERZV20D390 | 39(35 to 43)             | 25                        | 31     | 77                              | 0.2         | 28                  | 25            | 3000                           | 2000           | 13800                       |
| ERZV20D470 | 47(42 to 52)             | 30                        | 38     | 93                              | 0.2         | 34                  | 30            | 3000                           | 2000           | 13500                       |
| ERZV20D560 | 56(50 to 62)             | 35                        | 45     | 110                             | 0.2         | 41                  | 36            | 3000                           | 2000           | 12200                       |
| ERZV20D680 | 68(61 to 75)             | 40                        | 56     | 135                             | 0.2         | 49                  | 44            | 3000                           | 2000           | 11500                       |
| ERZV20D820 | 82(74 to 90)             | 50                        | 65     | 135                             | 1.0         | 56                  | 40            | 10000                          | 7000           | 7500                        |
| ERZV20D101 | 100(90 to 110)           | 60                        | 85     | 165                             | 1.0         | 70                  | 50            | 10000                          | 7000           | 6500                        |
| ERZV20D121 | 120(108 to 132)          | 75                        | 100    | 200                             | 1.0         | 85                  | 60            | 10000                          | 7000           | 5500                        |
| ERZV20D151 | 150(135 to 165)          | 95                        | 125    | 250                             | 1.0         | 106                 | 75            | 10000                          | 7000           | 4500                        |

★The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)

|            |                    |      |      |      |     |      |     |       |      |      |
|------------|--------------------|------|------|------|-----|------|-----|-------|------|------|
| ERZV20D201 | 200(185 to 225)    | 130  | 170  | 340  | 1.0 | 140  | 100 | 10000 | 7000 | 1700 |
| ERZV20D221 | 220(198 to 242)    | 140  | 180  | 360  | 1.0 | 155  | 110 | 10000 | 7000 | 1600 |
| ERZV20D241 | 240(216 to 264)    | 150  | 200  | 395  | 1.0 | 168  | 120 | 10000 | 7000 | 1500 |
| ERZV20D271 | 270(247 to 303)    | 175  | 225  | 455  | 1.0 | 190  | 135 | 10000 | 7000 | 1300 |
| ERZV20D331 | 330(297 to 363)    | 210  | 270  | 545  | 1.0 | 228  | 160 | 10000 | 6500 | 1100 |
| ERZV20D361 | 360(324 to 396)    | 230  | 300  | 595  | 1.0 | 255  | 180 | 10000 | 6500 | 1100 |
| ERZV20D391 | 390(351 to 429)    | 250  | 320  | 650  | 1.0 | 275  | 195 | 10000 | 6500 | 1100 |
| ERZV20D431 | 430(387 to 473)    | 275  | 350  | 710  | 1.0 | 303  | 215 | 10000 | 6500 | 1000 |
| ERZV20D471 | 470(423 to 517)    | 300  | 385  | 775  | 1.0 | 350  | 250 | 10000 | 6500 | 900  |
| ERZV20D511 | 510(459 to 561)    | 320  | 410  | 845  | 1.0 | 382  | 273 | 10000 | 6500 | 800  |
| ERZV20D561 | 560(504 to 616)    | 350  | 450  | 930  | 1.0 | 382  | 273 | 7500  | 6500 | 750  |
| ERZV20D621 | 620(558 to 682)    | 385  | 505  | 1025 | 1.0 | 382  | 273 | 7500  | 6500 | 700  |
| ERZV20D681 | 680(612 to 748)    | 420  | 560  | 1120 | 1.0 | 382  | 273 | 7500  | 6500 | 650  |
| ERZV20D751 | 750(675 to 825)    | 460  | 615  | 1240 | 1.0 | 420  | 300 | 7500  | 6500 | 600  |
| ERZV20D821 | 820(738 to 902)    | 510  | 670  | 1355 | 1.0 | 460  | 325 | 7500  | 6500 | 530  |
| ERZV20D911 | 910(819 to 1001)   | 550  | 745  | 1500 | 1.0 | 510  | 360 | 7500  | 6500 | 500  |
| ERZV20D102 | 1000(900 to 1100)  | 625  | 825  | 1650 | 1.0 | 565  | 400 | 7500  | 6500 | 450  |
| ERZV20D112 | 1100(990 to 1210)  | 680  | 895  | 1815 | 1.0 | 620  | 440 | 7500  | 6500 | 400  |
| ERZV20D182 | 1800(1700 to 1980) | 1000 | 1465 | 2970 | 1.0 | 1020 | 720 | 7500  | 6500 | 250  |

\*Ip Measuring current of clamping voltage 180 to 680 : 20 A, 820 to 182 : 100 A

## Dimensions in mm (not to scale)


Unit : mm

| Part No.   | D max. | T max. | W±1.0 | H max. | L±1.0 |
|------------|--------|--------|-------|--------|-------|
| ERZV20D180 | 21.5   | 5.1    | 10.0  | 24.5   | 1.5   |
| ERZV20D220 | 21.5   | 5.2    | 10.0  | 24.5   | 1.6   |
| ERZV20D270 | 21.5   | 5.3    | 10.0  | 24.5   | 1.7   |
| ERZV20D330 | 21.5   | 5.5    | 10.0  | 24.5   | 1.9   |
| ERZV20D390 | 21.5   | 5.5    | 10.0  | 24.5   | 1.9   |
| ERZV20D470 | 21.5   | 5.6    | 10.0  | 24.5   | 2.0   |
| ERZV20D560 | 21.5   | 5.7    | 10.0  | 24.5   | 2.1   |
| ERZV20D680 | 21.5   | 5.8    | 10.0  | 24.5   | 2.2   |
| ERZV20D820 | 21.5   | 4.9    | 10.0  | 24.5   | 1.8   |
| ERZV20D101 | 21.5   | 5.1    | 10.0  | 24.5   | 2.0   |
| ERZV20D121 | 21.5   | 5.3    | 10.0  | 24.5   | 2.2   |
| ERZV20D151 | 21.5   | 5.6    | 10.0  | 24.5   | 2.5   |


★ The following part numbers, kindly also consider corresponding, smaller E Series devices with better performance for their size. → [Please click here](#)

|            |      |      |       |      |             |
|------------|------|------|-------|------|-------------|
| ERZV20D201 | 21.5 | 5.2  | 10.0  | 24.5 | 2.1         |
| ERZV20D221 | 21.5 | 5.3  | 10.0  | 24.5 | 2.2         |
| ERZV20D241 | 21.5 | 5.4  | 10.0  | 24.5 | 2.3         |
| ERZV20D271 | 21.5 | 5.6  | 10.0  | 24.5 | 2.5         |
| ERZV20D331 | 21.5 | 5.9  | 10.0  | 24.5 | 2.8         |
| ERZV20D361 | 21.5 | 6.1  | 10.0  | 24.5 | 3.0         |
| ERZV20D391 | 21.5 | 6.2  | 10.0  | 24.5 | 3.1         |
| ERZV20D431 | 21.5 | 6.4  | 10.0  | 24.5 | 3.3         |
| ERZV20D471 | 21.5 | 6.6  | 10.0  | 24.5 | 3.5         |
| ERZV20D511 | 21.5 | 6.8  | 10.0  | 24.5 | 3.7         |
| ERZV20D561 | 22.5 | 7.1  | 10.0  | 25.5 | 4.2         |
| ERZV20D621 | 22.5 | 7.5  | 10.0  | 25.5 | 4.4         |
| ERZV20D681 | 22.5 | 7.8  | 10.0  | 25.5 | 4.7         |
| ERZV20D751 | 22.5 | 8.2  | 10.0  | 25.5 | 5.1         |
| ERZV20D821 | 22.5 | 8.5  | 10.0  | 25.5 | 5.4         |
| ERZV20D911 | 22.5 | 9.0  | 10.0  | 25.5 | 5.9         |
| ERZV20D102 | 22.5 | 9.5  | 10.0  | 25.5 | 6.4         |
| ERZV20D112 | 22.5 | 10.1 | 10.0  | 25.5 | 7.0         |
| ERZV20D182 | 23.5 | 14.8 | 15.0* | 28.0 | 10.7 (±2.0) |

\*: W<sub>2</sub>

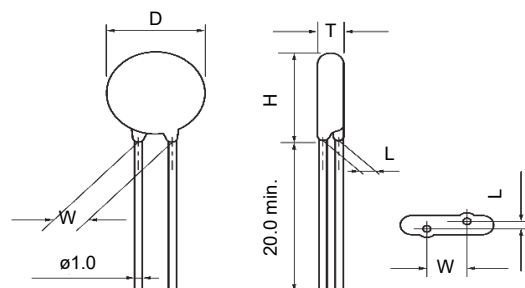


(ERZV20D182)



## Typical characteristics


## Voltage vs. Current+B47:AZ78+B47:AX74

ERZV20D180 to ERZV20D680

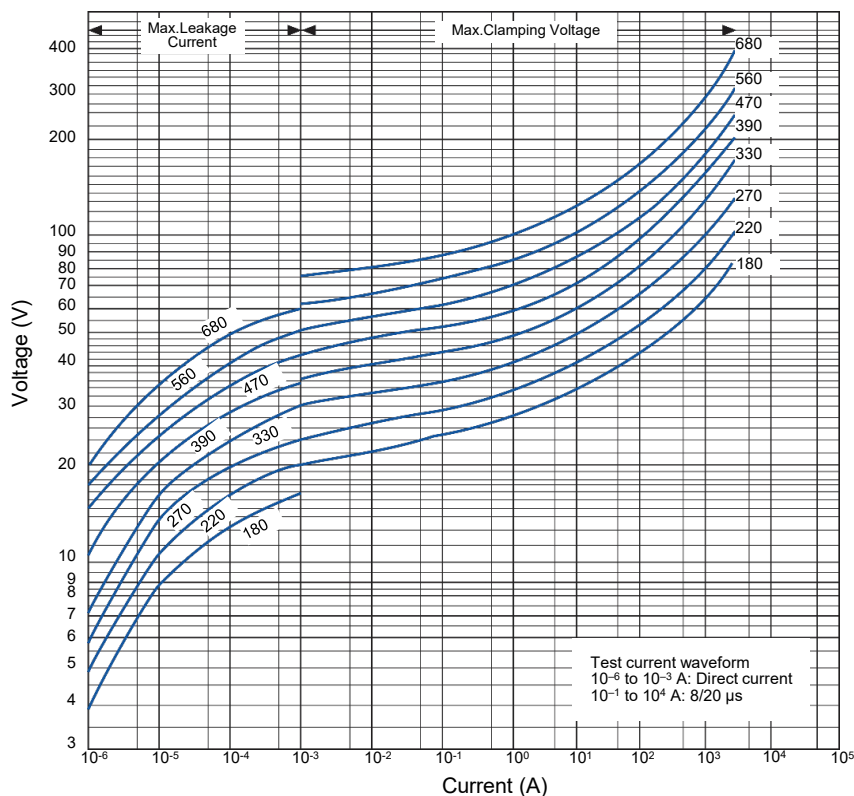

## Impulse Derating (Relation between impulse width and impulse current multiple)


ERZV20D180 to ERZV20D680

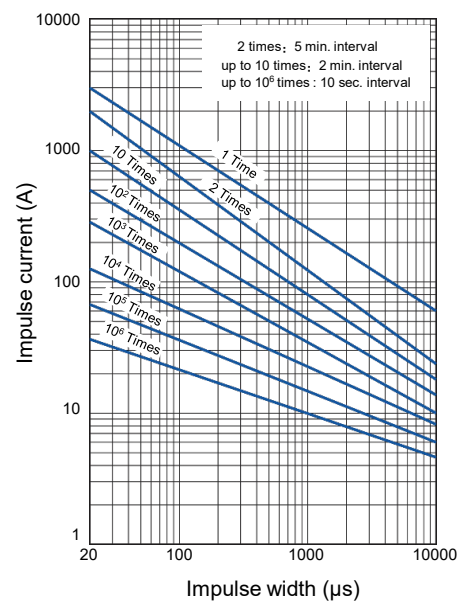

## Typical characteristics


### Voltage vs. Current

ERZV20D820 to ERZV20D511

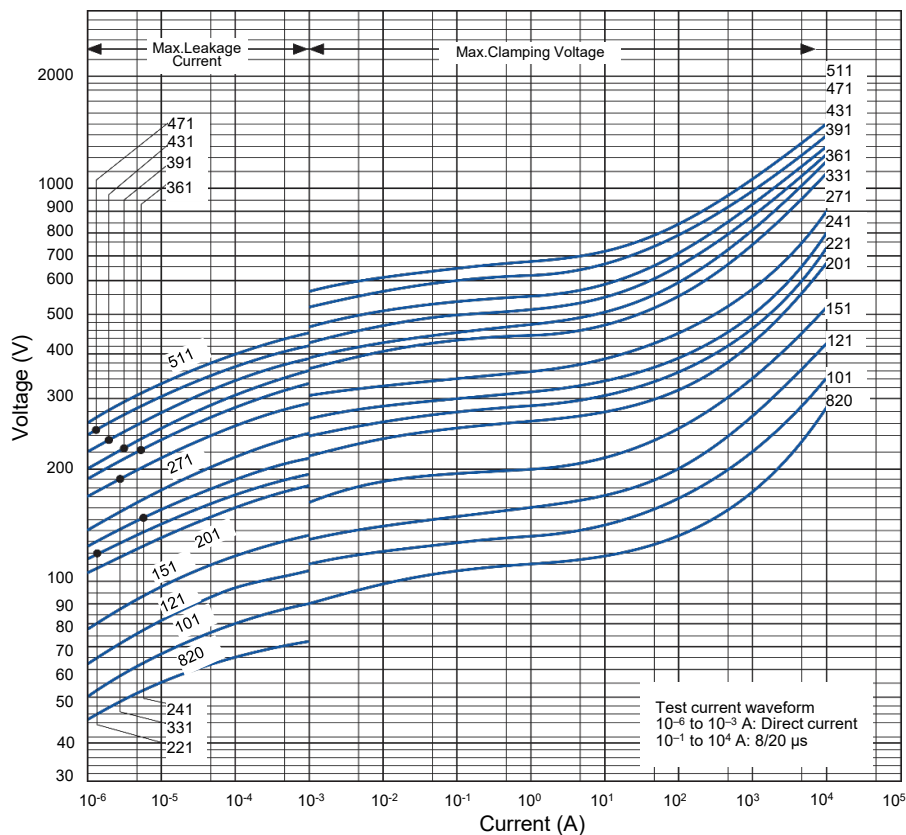


### Impulse Derating (Relation between impulse width and impulse current multiple)


ERZV20D820 to ERZV20D511

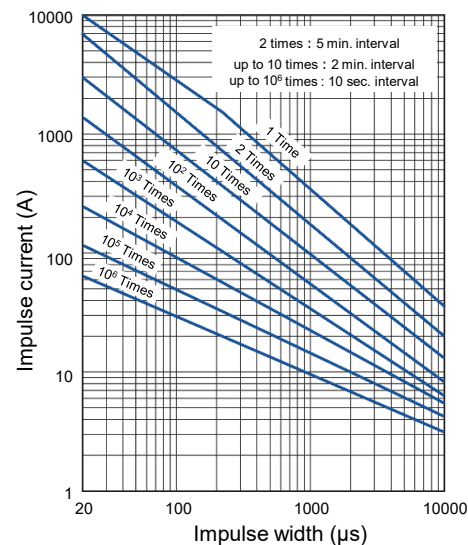


ERZV20D561 to ERZV20D112

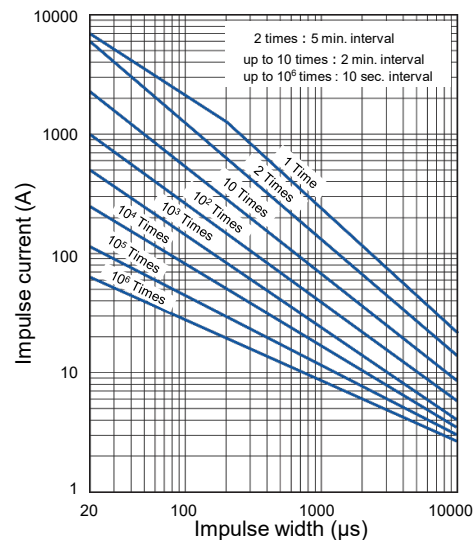

ERZV20D561 to ERZV20D182

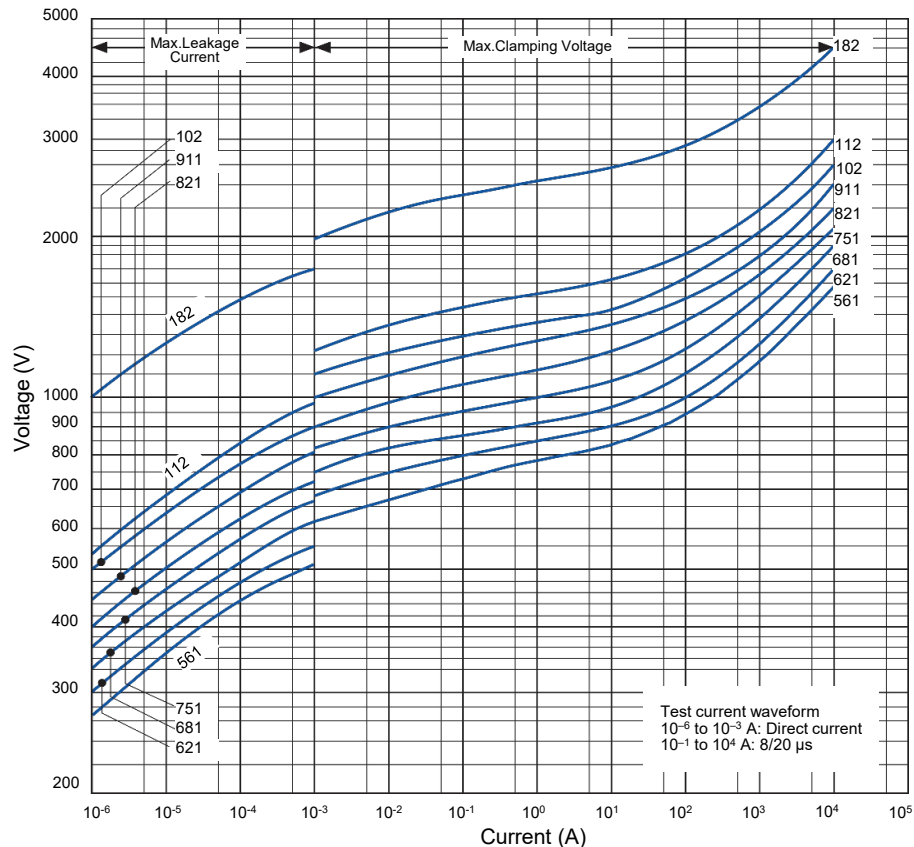


ERZV20D182

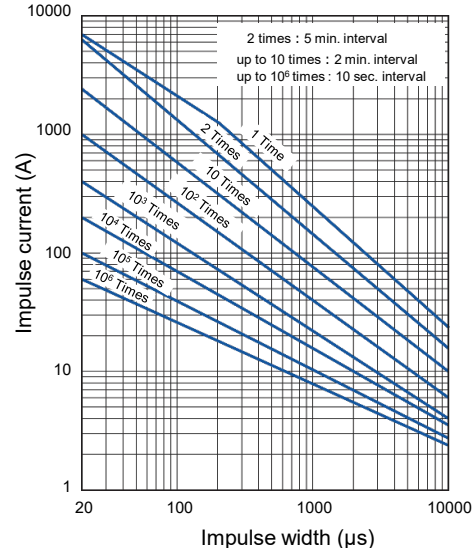

**Straight leads cut type (Bulk type)**

※ Ratings and characteristics is refer to bulk standard type.

**Dimensions in mm (not to scale)**

notes \* Dimension "L": Conforms to each individual specification.



\*\* Dimension "T": Conforms to each individual specification.

Unit : mm

| Series                     | 5                                      | 7                                      | 9                                      | 10                                     |                                        |                                        | 14                                     |                                        |                                        |
|----------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| Varistor voltage           | 180 to 471                             | 180 to 511                             | 180 to 511                             | 180 to 511                             | 561 to 751                             | 821 to 112                             | 180 to 511                             | 561 to 751                             | 821 to 112                             |
| Symbol                     |                                        |                                        |                                        |                                        |                                        |                                        |                                        |                                        |                                        |
| D                          | 7.0 max.                               | 8.5 max.                               | 11.5max.                               | 11.5max.                               | 12.5max.                               | 12.5max.                               | 15.5 max.                              | 16.0max.                               | 16.0max.                               |
| H                          | 10.0 max.                              | 11.5 max.                              | 14.0max.                               | 14.5max.                               | 15.5max.                               | 15.5max.                               | 18.5 max.                              | 19.0max.                               | 19.0max.                               |
| W                          | 5.0±1.0                                | 5.0±1.0                                | 5.0±1.0                                | 7.5±1.0                                | 7.5±1.0                                | 7.5±1.0                                | 7.5±1.0                                | 7.5±1.0                                | 7.5±1.0                                |
| ø d                        | 0.60 <sup>+0.06</sup> <sub>-0.05</sub> | 0.60 <sup>+0.06</sup> <sub>-0.05</sub> | 0.60 <sup>+0.06</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> |
| B                          | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.5                                | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.5                                |
| Standard products part No. | ERZV05D□□□CS                           | ERZV07D□□□CS                           | ERZV09D□□□CS                           | ERZV10D□□□CS                           | ERZV10D□□□CS                           | ERZV10D□□□C1                           | ERZV14D□□□CS                           | ERZV14D□□□CS                           | ERZV14D□□□C1                           |

**Crimped leads cut type (Bulk Type)**

※ Ratings and characteristics is refer to bulk standard type.

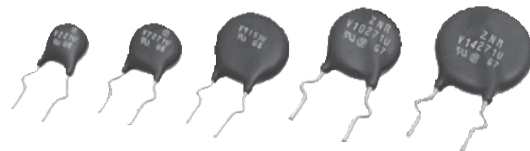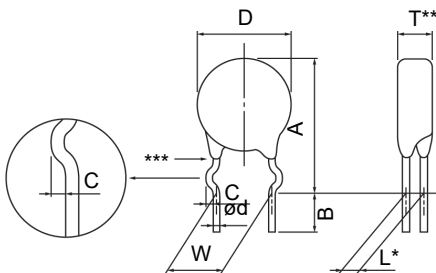**Dimensions in mm (not to scale)**

notes \* Dimension "L": Conforms to each individual specification.

\*\* Dimension "T": Conforms to each individual specification.

\*\*\* Resin extenysions : No resin below the center of the hook.

Unit : mm


| Series                     | 5                                      | 7                                      | 9                                      | 10                                     |                                        |                                        | 14                                     |                                        |                                        |
|----------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| Varistor voltage           | 180 to 471                             | 180 to 511                             | 180 to 511                             | 180 to 511                             | 561 to 751                             | 821 to 112                             | 180 to 511                             | 561 to 751                             | 821 to 112                             |
| Symbol                     |                                        |                                        |                                        |                                        |                                        |                                        |                                        |                                        |                                        |
| A                          | 13.0 max.                              | 14.5 max.                              | 17.5 max.                              | 17.5 max.                              | 19.0 max.                              | 20.0 max.                              | 21.0 max.                              | 22.0 max.                              | 23.5 max.                              |
| D                          | 7.0 max.                               | 8.5 max.                               | 11.5max.                               | 11.5max.                               | 12.5max.                               | 12.5max.                               | 15.5 max.                              | 16.0max.                               | 16.0max.                               |
| C                          | 1.2±0.4                                | 1.2±0.4                                | 1.2±0.4                                | 1.4±0.4                                | 1.4±0.4                                | 1.4±0.4                                | 1.4±0.4                                | 1.4±0.4                                | 1.4±0.4                                |
| W                          | 5.0±1.0                                | 5.0±1.0                                | 5.0±1.0                                | 7.5±1.0                                | 7.5±1.0                                | 7.5±1.0                                | 7.5±1.0                                | 7.5±1.0                                | 7.5±1.0                                |
| ø d                        | 0.60 <sup>+0.06</sup> <sub>-0.05</sub> | 0.60 <sup>+0.06</sup> <sub>-0.05</sub> | 0.60 <sup>+0.06</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> |
| B                          | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.5                                | 4.0±1.0                                | 4.0±1.0                                | 4.0±1.5                                |
| Standard products part No. | ERZV05V□□□CS                           | ERZV07V□□□CS                           | ERZV09V□□□CS                           | ERZV10V□□□CS                           | ERZV10V□□□CS                           | ERZV10V□□□C1                           | ERZV14V□□□CS                           | ERZV14V□□□CS                           | ERZV14V□□□C1                           |

# Taping specifications for automated assembly (Straight leads and taping)

※ Ratings and characteristics is refer to bulk standard type.


## Dimensions in mm (not to scale)

Type I・II

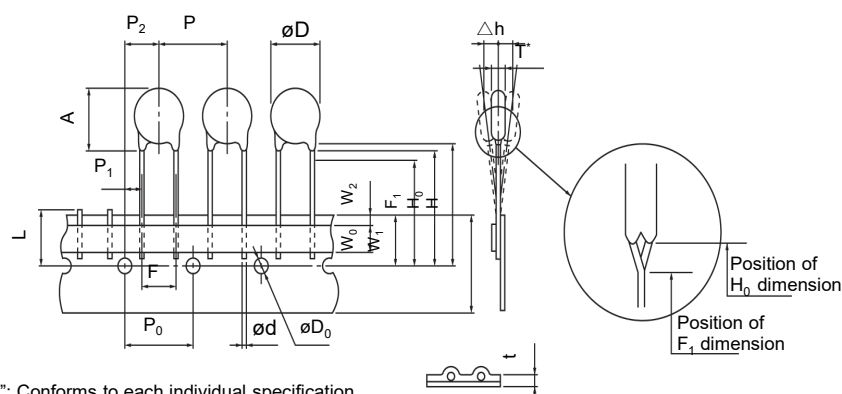

\* Dimension "T": Conforms to each individual specification.

Type III・IV

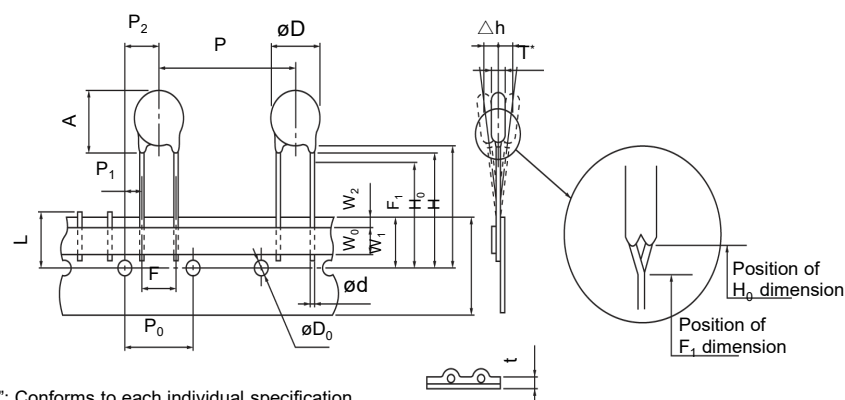

\* Dimension "T": Conforms to each individual specification.

Unit : mm

| Series                     | 5                                      | 7                                      | 9                                      | 10                                     |                                        |                                        | 14                                     |                                        |                                        |
|----------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| Varistor Voltage           | 180 to 471                             | 180 to 511                             | 180 to 511                             | 180 to 331                             | 361 to 511                             | 561 to 112                             | 180 to 331                             | 361 to 511                             | 561 to 112                             |
| 記号<br>Type                 | Type I                                 | Type I                                 | Type I                                 | Type I                                 | Type II                                | Type II                                | type III                               | Type IV                                | Type IV                                |
| P                          | 12.7±1.0                               | 12.7±1.0                               | 12.7±1.0                               | 15.0±1.0                               | 15.0±1.0                               | 15.0±1.0                               | 30.0±1.0                               | 30.0±1.0                               | 30.0±1.0                               |
| P <sub>0</sub>             | 12.7±0.3                               | 12.7±0.3                               | 12.7±0.3                               | 15.0±0.3                               | 15.0±0.3                               | 15.0±0.3                               | 15.0±0.3                               | 15.0±0.3                               | 15.0±0.3                               |
| P <sub>1</sub>             | 3.85±0.70                              | 3.85±0.70                              | 3.85±0.70                              | 3.75±0.70                              | 3.75±0.70                              | 3.75±0.70                              | 3.75±0.70                              | 3.75±0.70                              | 3.75±0.70                              |
| P <sub>2</sub>             | 6.35±1.30                              | 6.35±1.30                              | 6.35±1.30                              | 7.5±1.3                                | 7.5±1.3                                | 7.5±1.3                                | 7.5±1.3                                | 7.5±1.3                                | 7.5±1.3                                |
| ø d                        | 0.60 <sup>+0.06</sup> <sub>-0.05</sub> | 0.60 <sup>+0.06</sup> <sub>-0.05</sub> | 0.60 <sup>+0.06</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> <sub>-0.05</sub> |
| F                          | 5.0±0.5                                | 5.0±0.5                                | 5.0±0.5                                | 7.5±0.5                                | 7.5±0.5                                | 7.5±0.5                                | 7.5±0.5                                | 7.5±0.5                                | 7.5±0.5                                |
| △ h                        | 0±2                                    | 0±2                                    | 0±2                                    | 0±2                                    | 0±2                                    | 0±2                                    | 0±2                                    | 0±2                                    | 0±2                                    |
| W                          | 18.0 <sup>+1.0</sup> <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> <sub>-0.5</sub>   |
| W <sub>0</sub>             | 5.0 min.                               | 5.0 min.                               | 5.0 min.                               | 5.0 min.                               | 5.0 min.                               | 5.0 min.                               | 5.0 min.                               | 5.0 min.                               | 5.0 min.                               |
| W <sub>1</sub>             | 9.0±0.5                                | 9.0±0.5                                | 9.0±0.5                                | 9.0±0.5                                | 9.0±0.5                                | 9.0±0.5                                | 9.0±0.5                                | 9.0±0.5                                | 9.0±0.5                                |
| W <sub>2</sub>             | 3 max.                                 | 3 max.                                 | 3 max.                                 | 3 max.                                 | 3 max.                                 | 3 max.                                 | 3 max.                                 | 3 max.                                 | 3 max.                                 |
| H                          | Approx. 20                             | Approx. 20                             | Approx. 20                             | Approx. 22                             | Approx. 22                             | Approx. 22                             | Approx. 22                             | Approx. 22                             | Approx. 22                             |
| H <sub>0</sub>             | 17.0±0.5                               | 17.0±0.5                               | 17.0±0.5                               | 18.0 <sup>+2.0</sup> <sub>0</sub>      | —                                      | —                                      | 18.0 <sup>+2.0</sup> <sub>0</sub>      | —                                      | —                                      |
| F <sub>1</sub>             | —                                      | —                                      | —                                      | —                                      | 16.00 <sup>+0.75</sup> <sub>-0.5</sub> | 16.00 <sup>+0.75</sup> <sub>-0.5</sub> | —                                      | 16.00 <sup>+0.75</sup> <sub>-0.5</sub> | 16.00 <sup>+0.75</sup> <sub>-0.5</sub> |
| øD <sub>0</sub>            | ø4.0±0.2                               | ø4.0±0.2                               | ø4.0±0.2                               | ø4.0±0.2                               | ø4.0±0.2                               | ø4.0±0.2                               | ø4.0±0.2                               | ø4.0±0.2                               | ø4.0±0.2                               |
| t                          | 0.6±0.3                                | 0.6±0.3                                | 0.6±0.3                                | 0.6±0.3                                | 0.6±0.3                                | 0.6±0.3                                | 0.6±0.3                                | 0.6±0.3                                | 0.6±0.3                                |
| L                          | 11 max.                                | 11 max.                                | 11 max.                                | 11 max.                                | 11 max.                                | 11 max.                                | 11 max.                                | 11 max.                                | 11 max.                                |
| øD                         | 7.0 max.                               | 8.5 max.                               | 11.5 max.                              | 11.5 max.                              | 11.5 max.                              | 12.5 max.                              | 15.5 max.                              | 15.5 max.                              | 16.0 max.                              |
| A                          | 10.0 max.                              | 11.5 max.                              | 14.0 max.                              | 14.5 max.                              | 14.5 max.                              | 15.5 max.                              | 18.5 max.                              | 18.5 max.                              | 19.0 max.                              |
| Standard Products Part No. | ERZVA5D□□□                             | ERZVA7D□□□                             | ERZVA9D□□□                             | ERZVGAD□□□                             | ERZVGAD□□□                             | ERZVGAD□□□                             | ERZVGED□□□                             | ERZVGED□□□                             | ERZVGED□□□                             |


## D type / V series (Taping specifications)

### Taping specifications for automated assembly (Crimped leads and taping)

※ Ratings and characteristics is refer to bulk standard type.


### Dimensions in mm (not to scale)

Type I

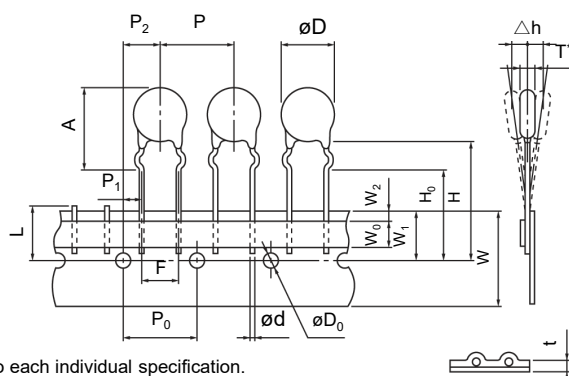

\* Dimension "T": Conforms to each individual specification.

Type II

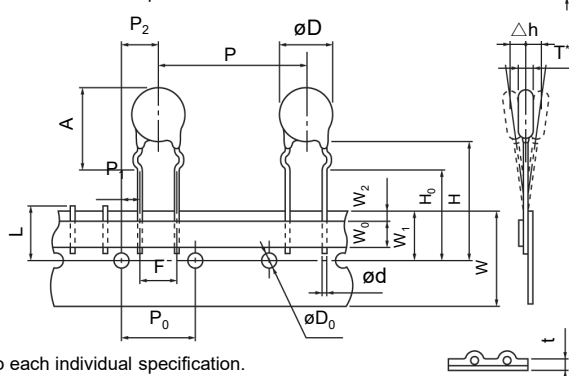

\* Dimension "T": Conforms to each individual specification.

Unit : mm

| Series                     | 5                                        | 7                                        | 9                                        | 10                                       |                                          |                                          | 14                                       |                                          |                                          |
|----------------------------|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|
| Varister Voltage           | 180 to 471                               | 180 to 511                               | 180 to 511                               | 180 to 331                               | 361 to 511                               | 561 to 112                               | 180 to 331                               | 361 to 511                               | 561 to 112                               |
| Type                       | Type I                                   | Type I                                   | Type I                                   | Type I                                   | Type I                                   | Type I                                   | Type II                                  | Type II                                  | Type II                                  |
| P                          | 12.7±1.0                                 | 12.7±1.0                                 | 12.7±1.0                                 | 15.0±1.0                                 | 15.0±1.0                                 | 15.0±1.0                                 | 30.0±1.0                                 | 30.0±1.0                                 | 30.0±1.0                                 |
| P <sub>0</sub>             | 12.7±0.3                                 | 12.7±0.3                                 | 12.7±0.3                                 | 15.0±0.3                                 | 15.0±0.3                                 | 15.0±0.3                                 | 15.0±0.3                                 | 15.0±0.3                                 | 15.0±0.3                                 |
| P <sub>1</sub>             | 3.85±0.70                                | 3.85±0.70                                | 3.85±0.70                                | 3.75±0.70                                | 3.75±0.70                                | 3.75±0.70                                | 3.75±0.70                                | 3.75±0.70                                | 3.75±0.70                                |
| P <sub>2</sub>             | 6.35±1.30                                | 6.35±1.30                                | 6.35±1.30                                | 7.5±1.3                                  | 7.5±1.3                                  | 7.5±1.3                                  | 7.5±1.3                                  | 7.5±1.3                                  | 7.5±1.3                                  |
| ø d                        | 0.60 <sup>+0.06</sup> / <sub>-0.05</sub> | 0.60 <sup>+0.06</sup> / <sub>-0.05</sub> | 0.60 <sup>+0.06</sup> / <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> / <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> / <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> / <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> / <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> / <sub>-0.05</sub> | 0.80 <sup>+0.08</sup> / <sub>-0.05</sub> |
| F                          | 5.0±0.5                                  | 5.0±0.5                                  | 5.0±0.5                                  | 7.5±0.5                                  | 7.5±0.5                                  | 7.5±0.5                                  | 7.5±0.5                                  | 7.5±0.5                                  | 7.5±0.5                                  |
| Δ h                        | 0±2                                      | 0±2                                      | 0±2                                      | 0±2                                      | 0±2                                      | 0±2                                      | 0±2                                      | 0±2                                      | 0±2                                      |
| W                          | 18.0 <sup>+1.0</sup> / <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> / <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> / <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> / <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> / <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> / <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> / <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> / <sub>-0.5</sub>   | 18.0 <sup>+1.0</sup> / <sub>-0.5</sub>   |
| W <sub>0</sub>             | 5.0 min.                                 | 5.0 min.                                 | 5.0 min.                                 | 5.0 min.                                 | 5.0 min.                                 | 5.0 min.                                 | 5.0 min.                                 | 5.0 min.                                 | 5.0 min.                                 |
| W <sub>1</sub>             | 9.0±0.5                                  | 9.0±0.5                                  | 9.0±0.5                                  | 9.0±0.5                                  | 9.0±0.5                                  | 9.0±0.5                                  | 9.0±0.5                                  | 9.0±0.5                                  | 9.0±0.5                                  |
| W <sub>2</sub>             | 3 max.                                   | 3 max.                                   | 3 max.                                   | 3 max.                                   | 3 max.                                   | 3 max.                                   | 3 max.                                   | 3 max.                                   | 3 max.                                   |
| H                          | Approx. 22                               | Approx. 22                               | Approx. 22                               | Approx. 22                               | Approx. 22                               | Approx. 22                               | Approx. 22                               | Approx. 22                               | Approx. 22                               |
| H <sub>0</sub>             | 17.0±0.5                                 | 17.0±0.5                                 | 17.0±0.5                                 | 16.0±0.5                                 | 16.0±0.5                                 | 16.0±0.5                                 | 16.0±0.5                                 | 16.0±0.5                                 | 16.0±0.5                                 |
| øD <sub>0</sub>            | ø4.0±0.2                                 | ø4.0±0.2                                 | ø4.0±0.2                                 | ø4.0±0.2                                 | ø4.0±0.2                                 | ø4.0±0.2                                 | ø4.0±0.2                                 | ø4.0±0.2                                 | ø4.0±0.2                                 |
| t                          | 0.6±0.3                                  | 0.6±0.3                                  | 0.6±0.3                                  | 0.6±0.3                                  | 0.6±0.3                                  | 0.6±0.3                                  | 0.6±0.3                                  | 0.6±0.3                                  | 0.6±0.3                                  |
| L                          | 11 max.                                  | 11 max.                                  | 11 max.                                  | 11 max.                                  | 11 max.                                  | 11 max.                                  | 11 max.                                  | 11 max.                                  | 11 max.                                  |
| øD                         | 7.0 max.                                 | 8.5 max.                                 | 11.5 max.                                | 11.5 max.                                | 11.5 max.                                | 12.5 max.                                | 15.5 max.                                | 15.5 max.                                | 16.0 max.                                |
| A                          | 13.0 max.                                | 14.5 max.                                | 17.5 max.                                | 17.5 max.                                | 17.5 max.                                | *(refer)                                 | 21.0 max.                                | 21.0 max.                                | *(refer)                                 |
| Standard Products Part No. | ERZVA5V□□□                               | ERZVA7V□□□                               | ERZVA9V□□□                               | ERZVEAV□□□                               | ERZVEAV□□□                               | ERZVEAV□□□                               | ERZVEEV□□□                               | ERZVEEV□□□                               | ERZVEEV□□□                               |

#### \*Dimension "A"

| Part No.   | 10 Series | 14 Series |
|------------|-----------|-----------|
| ERZV□□V561 | 19.0 max. | 22.0 max. |
| ERZV□□V621 | 19.0 max. | 22.0 max. |
| ERZV□□V681 | 19.0 max. | 22.0 max. |
| ERZV□□V751 | 19.0 max. | 22.0 max. |

| Part No.   | 10 Series | 14 Series |
|------------|-----------|-----------|
| ERZV□□V821 | 20.0 max. | 23.5 max. |
| ERZV□□V911 | 20.0 max. | 23.5 max. |
| ERZV□□V102 | 20.0 max. | 23.5 max. |
| ERZV□□V112 | 20.0 max. | 23.5 max. |

## Application note for safety standards


- Approvals products lists in "Reference Guide to Standard Products."
- UL and VDE : Registered in "Type name", it isn't registered in "Panasonic Part No."
- CQC : Registered in "Panasonic Part No."
- "Rated Voltages" are specified for UL recognized components in list shown below.

## The AC rated voltage and maximum allowable voltage

| Type name | Maximum allowable voltage |        | Rated voltage (Vrms) |                    |
|-----------|---------------------------|--------|----------------------|--------------------|
|           | ACrms (V)                 | DC (V) | UL1449               | CSA C22.2 No.269.5 |
| V*820U    | 50                        | 65     | 45                   | N/A                |
| V*101U    | 60                        | 85     | 55                   | N/A                |
| V*121U    | 75                        | 100    | 68                   | N/A                |
| V*151U    | 95                        | 125    | 86                   | N/A                |
| V*201U    | 130                       | 170    | 118                  | 118                |
| V*221U    | 140                       | 180    | 127                  | 127                |
| V*241U    | 150                       | 200    | 136                  | 136                |
| V*271U    | 175                       | 225    | 159                  | 159                |
| V*331U    | 210                       | 270    | 189                  | 189                |
| V*361U    | 230                       | 300    | 209                  | 209                |
| V*391U    | 250                       | 320    | 227                  | 227                |
| V*431U    | 275                       | 350    | 250                  | 250                |
| V*471U    | 300                       | 385    | 272                  | 272                |
| V*511U    | 320                       | 410    | 291                  | 291                |
| V*561U    | 350                       | 450    | 320                  | 320                |
| V*621U    | 385                       | 505    | 350                  | 350                |
| V*681U    | 420                       | 560    | 381                  | 381                |
| V*751U    | 460                       | 615    | 418                  | 418                |
| V*821U    | 510                       | 670    | 463                  | 463                |
| V*911U    | 550                       | 745    | 500                  | 500                |
| V*102U    | 625                       | 825    | 568                  | 568                |
| V*112U    | 680                       | 895    | 600                  | 618                |
| V*182U    | 1000                      | 1465   | 600                  | 909                |

\* : 5 Series is blank, 7 series is 7, 9 series is 9, 10 series is 10, 14 series is 14, 20 series is 20

## Explanation of the contents



| Mark            | Explanation of the content              |                                                              |
|-----------------|-----------------------------------------|--------------------------------------------------------------|
| V*□□□           | Abbreviation of Part No.<br>(Type name) | [ □□□<br>Nominal varistor voltage ]                          |
| V*□□□U          |                                         |                                                              |
| ○               | Factory identification mark             | None : Japan<br>Q : Indonesia                                |
| ◆ <sup>*1</sup> | Year code                               | 2019 : 9, 2020 : K, 2021 : A<br>2022 : B, 2023 : C, 2024 : D |
| ◇               | Monthly code                            | Jan : 1 to Sep : 9,<br>Oct. : 0, Nov. : N, Dec. : D          |
|                 | UL recognized components mark           |                                                              |
|                 | CSA monogram                            |                                                              |

\* : 5 series is blank, 7 series is 7, 9 series is 9, 10 series is 10, 14 series is 14, 20 series is 20

\*1: If the 10's digit of a Christian year is an even year, as an end abbreviation, an alphabetic character is used.


1 : A, 2 : B, 3 : C, 4 : D, 5 : E, 6 : F, 7 : G, 8 : H, 9 : J, 0 : K

If the 10's digit of a Christian year is an odd year, as an end abbreviation, a number is used.

## Marking contents

| Series (Example)<br>Varistor voltage | 5<br>(ERZV05D□□□) | 7<br>(ERZV07D□□□) | 9<br>(ERZV09D□□□) | 10<br>(ERZV10D□□□)    | 14<br>(ERZV14D□□□)    | 20<br>(ERZV20D□□□)    |
|--------------------------------------|-------------------|-------------------|-------------------|-----------------------|-----------------------|-----------------------|
| 180 to 680                           | V□□□<br>○◆◇       | V7□□□<br>○◆◇      | V9□□□<br>○◆◇      | ZNR<br>V10□□□<br>○◆◇  | ZNR<br>V14□□□<br>○◆◇  | ZNR<br>V20□□□<br>○◆◇  |
| 820 to 151                           | V□□□U<br>○◆◇      | V7□□□U<br>○◆◇     | V9□□□U<br>○◆◇     | ZNR<br>V10□□□U<br>○◆◇ | ZNR<br>V14□□□U<br>○◆◇ | ZNR<br>V20□□□U<br>○◆◇ |
| 201 or more                          | <br>V□□□U<br>○◆◇  | <br>V7□□□U<br>○◆◇ | <br>V9□□□U<br>○◆◇ | ZNR<br>V10□□□U<br>○◆◇ | ZNR<br>V14□□□U<br>○◆◇ | ZNR<br>V20□□□U<br>○◆◇ |

## Performance characteristics

| Characteristics                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Test methods / description                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Specifications               |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------|-----------|--------------------------------------------------------|---------------------|--------------|-----------------|--|--------------------------|--------------------|--------------------|--|--------------------------|---------------------|---------------------|--|--------------------------|---------------------|---------------------|--|--------------------------|---------------------|---------------------|--|--------------------------|---------------------|---------------------|--|--------------------------|----------------------|---------------------|--|--------------------------|---------------------|---------------------|--|--------------------------|----------------------|---------------------|--|--------------------------|----------------------|---------------------|--|--------------------------|----------------------|---------------------|--|--------------|----------------------|---------------------|--|--------------------------|----------------------|----------------------|--|--------------|----------------------|---------------------|--|--------------------------|----------------------|----------------------|--|------------|----------------------|----------------------|--|-------------------------------------------|
| Standard test condition                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Electrical measurements (initial/after tests) shall be conducted at temperature of 5 to 35 °C, relative humidity of maximum 85 %.                                                                                                                                                                                                                                                                                                                                                 | —                            |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| Electrical                                                | Varistor voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | The voltage between two terminals with the specified measuring current $C_{mA}$ DC applied is called VC or $V_{CmA}$ . The measurement shall be made as fast as possible to avoid heat affection.                                                                                                                                                                                                                                                                                 | To meet the specified value. |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Maximum allowable voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | The maximum sinusoidal RMS voltage or maximum DC voltage that can be applied continuously.                                                                                                                                                                                                                                                                                                                                                                                        |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Clamping voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | The maximum voltage between two terminals with the specified standard impulse current (8/20 $\mu$ s) illustrated below applied. <div></div>                                                                                                                                                                                                                                                     |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Rated power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | The power that can be applied in the specified ambient temperature.                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Maximum energy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | The maximum energy within the varistor voltage change of $\pm 10$ % when a single impulse current of 2 ms or 10/1000 $\mu$ s is applied.                                                                                                                                                                                                                                                                                                                                          |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Maximum peak current (Withstanding Surge Current)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 2 times<br>1 time                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              | The maximum current within the varistor voltage change of $\pm 10$ % when a standard impulse current of 8/20 $\mu$ s is applied two times with an interval of 5 minutes.<br>The maximum current within the varistor voltage change of $\pm 10$ % with a single standard impulse current of 8/20 $\mu$ s is applied. |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Temperature coefficient of varistor voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | $\frac{V_{CmA} \text{ at } 85^\circ\text{C} - V_{CmA} \text{ at } 25^\circ\text{C}}{V_{CmA} \text{ at } 25^\circ\text{C}} \times \frac{1}{60} 100(\%/^\circ\text{C})$                                                                                                                                                                                                                                                                                                             |                              | 0 to -0.05 %/ °C max.                                                                                                                                                                                                                                                                                               |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Capacitance shall be measured at 1 kHz $\pm 10$ %, 1 Vrms max. (1 MHz $\pm 10$ % below 100 pF), 0 V bias and 20 $\pm$ 2 °C.                                                                                                                                                                                                                                                                                                                                                       |                              | To meet the specified value.                                                                                                                                                                                                                                                                                        |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Withstanding voltage (Body Insulation)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | The specified voltage shall be applied between both terminals of the specimen connected together and metal foil closely wrapped round its body for 1 minute. <table><tr><th>Classification (Nominal varistor voltage)</th><th>Test Voltage (AC)</th></tr><tr><td><math>V_{0.1 \text{ mA}}, V_{1 \text{ mA}} \leq 330 \text{ V}</math></td><td>1000 Vrms</td></tr><tr><td><math>V_{0.1 \text{ mA}}, V_{1 \text{ mA}} &gt; 330 \text{ V}</math></td><td>1500 Vrms</td></tr></table> |                              | Classification (Nominal varistor voltage)                                                                                                                                                                                                                                                                           | Test Voltage (AC) | $V_{0.1 \text{ mA}}, V_{1 \text{ mA}} \leq 330 \text{ V}$ | 1000 Vrms | $V_{0.1 \text{ mA}}, V_{1 \text{ mA}} > 330 \text{ V}$ | 1500 Vrms           | No breakdown |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| Classification (Nominal varistor voltage)                 | Test Voltage (AC)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| $V_{0.1 \text{ mA}}, V_{1 \text{ mA}} \leq 330 \text{ V}$ | 1000 Vrms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| $V_{0.1 \text{ mA}}, V_{1 \text{ mA}} > 330 \text{ V}$    | 1500 Vrms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| Impulse life                                              | The change of VC shall be measured after the impulse current listed below is applied 10000 or 100000 times continuously with the interval of 10 seconds at room temperature. <table><tr><th rowspan="3">Part No.</th><th>Item</th><th>Impulse Life( I )</th><th>Impulse Life( II )</th></tr><tr><th>Times</th><th><math>\times 10^4</math> Times</th><th><math>\times 10^5</math> Times</th></tr><tr><th>Current</th><th colspan="2">Impulse Current</th></tr><tr><td>ERZV05D180 to ERZV05D680</td><td>8 A (8/20 <math>\mu</math>s)</td><td>5 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV07D180 to ERZV07D680</td><td>25 A (8/20 <math>\mu</math>s)</td><td>15 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV09D180 to ERZV09D680</td><td>50 A (8/20 <math>\mu</math>s)</td><td>35 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV10D180 to ERZV10D680</td><td>50 A (8/20 <math>\mu</math>s)</td><td>35 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV14D180 to ERZV14D680</td><td>90 A (8/20 <math>\mu</math>s)</td><td>50 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV20D180 to ERZV20D680</td><td>130 A (8/20 <math>\mu</math>s)</td><td>65 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV05D820 to ERZV05D471</td><td>40 A (8/20 <math>\mu</math>s)</td><td>25 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV07D820 to ERZV07D511</td><td>100 A (8/20 <math>\mu</math>s)</td><td>60 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV09D820 to ERZV09D511</td><td>150 A (8/20 <math>\mu</math>s)</td><td>85 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV10D820 to ERZV10D112</td><td>150 A (8/20 <math>\mu</math>s)</td><td>85 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV10D182CS</td><td>120 A (8/20 <math>\mu</math>s)</td><td>75 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV14D820 to ERZV14D112</td><td>200 A (8/20 <math>\mu</math>s)</td><td>110 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV14D182CS</td><td>150 A (8/20 <math>\mu</math>s)</td><td>90 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV20D820 to ERZV20D112</td><td>250 A (8/20 <math>\mu</math>s)</td><td>120 A (8/20 <math>\mu</math>s)</td><td></td></tr><tr><td>ERZV20D182</td><td>200 A (8/20 <math>\mu</math>s)</td><td>100 A (8/20 <math>\mu</math>s)</td><td></td></tr></table> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Part No.                     | Item                                                                                                                                                                                                                                                                                                                | Impulse Life( I ) | Impulse Life( II )                                        | Times     | $\times 10^4$ Times                                    | $\times 10^5$ Times | Current      | Impulse Current |  | ERZV05D180 to ERZV05D680 | 8 A (8/20 $\mu$ s) | 5 A (8/20 $\mu$ s) |  | ERZV07D180 to ERZV07D680 | 25 A (8/20 $\mu$ s) | 15 A (8/20 $\mu$ s) |  | ERZV09D180 to ERZV09D680 | 50 A (8/20 $\mu$ s) | 35 A (8/20 $\mu$ s) |  | ERZV10D180 to ERZV10D680 | 50 A (8/20 $\mu$ s) | 35 A (8/20 $\mu$ s) |  | ERZV14D180 to ERZV14D680 | 90 A (8/20 $\mu$ s) | 50 A (8/20 $\mu$ s) |  | ERZV20D180 to ERZV20D680 | 130 A (8/20 $\mu$ s) | 65 A (8/20 $\mu$ s) |  | ERZV05D820 to ERZV05D471 | 40 A (8/20 $\mu$ s) | 25 A (8/20 $\mu$ s) |  | ERZV07D820 to ERZV07D511 | 100 A (8/20 $\mu$ s) | 60 A (8/20 $\mu$ s) |  | ERZV09D820 to ERZV09D511 | 150 A (8/20 $\mu$ s) | 85 A (8/20 $\mu$ s) |  | ERZV10D820 to ERZV10D112 | 150 A (8/20 $\mu$ s) | 85 A (8/20 $\mu$ s) |  | ERZV10D182CS | 120 A (8/20 $\mu$ s) | 75 A (8/20 $\mu$ s) |  | ERZV14D820 to ERZV14D112 | 200 A (8/20 $\mu$ s) | 110 A (8/20 $\mu$ s) |  | ERZV14D182CS | 150 A (8/20 $\mu$ s) | 90 A (8/20 $\mu$ s) |  | ERZV20D820 to ERZV20D112 | 250 A (8/20 $\mu$ s) | 120 A (8/20 $\mu$ s) |  | ERZV20D182 | 200 A (8/20 $\mu$ s) | 100 A (8/20 $\mu$ s) |  | $\Delta V_{CmA} / V_{CmA} \leq \pm 10 \%$ |
| Part No.                                                  | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Impulse Life( I )                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              | Impulse Life( II )                                                                                                                                                                                                                                                                                                  |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Times                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | $\times 10^4$ Times                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              | $\times 10^5$ Times                                                                                                                                                                                                                                                                                                 |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
|                                                           | Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Impulse Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV05D180 to ERZV05D680                                  | 8 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 5 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV07D180 to ERZV07D680                                  | 25 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 15 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV09D180 to ERZV09D680                                  | 50 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 35 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV10D180 to ERZV10D680                                  | 50 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 35 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV14D180 to ERZV14D680                                  | 90 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 50 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV20D180 to ERZV20D680                                  | 130 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 65 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV05D820 to ERZV05D471                                  | 40 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 25 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV07D820 to ERZV07D511                                  | 100 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 60 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV09D820 to ERZV09D511                                  | 150 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 85 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV10D820 to ERZV10D112                                  | 150 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 85 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV10D182CS                                              | 120 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 75 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV14D820 to ERZV14D112                                  | 200 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 110 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV14D182CS                                              | 150 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 90 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV20D820 to ERZV20D112                                  | 250 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 120 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |
| ERZV20D182                                                | 200 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 100 A (8/20 $\mu$ s)                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                              |                                                                                                                                                                                                                                                                                                                     |                   |                                                           |           |                                                        |                     |              |                 |  |                          |                    |                    |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                     |                     |  |                          |                      |                     |  |                          |                      |                     |  |                          |                      |                     |  |              |                      |                     |  |                          |                      |                      |  |              |                      |                     |  |                          |                      |                      |  |            |                      |                      |  |                                           |

## Performance characteristics

| Characteristics                     |                                                                                                                                                                                                                                                                                                                                                            | Test methods / description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                 | Specifications                         |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|----------------------------------------|------------------|------------------|-------|---------|--------|---------------------------------|------------------|------|---|-------|------|---|------------------|------|-------------------------------------------------------------------------------|
| Mechanical                          | Robustness of terminations (Tensile)                                                                                                                                                                                                                                                                                                                       | After gradually applying the force specified below and keeping the unit fixed for 10 seconds, the terminal shall be visually examined for any damage.<br><br><table><tr><td>Terminal diameter</td><td>Force</td></tr><tr><td>ø0.6 mm, ø0.8 mm</td><td>9.8 N</td></tr><tr><td>ø1.0 mm</td><td>19.6 N</td></tr></table>                                                                                                                                                                                                        |                                                                                 | Terminal diameter                      | Force            | ø0.6 mm, ø0.8 mm | 9.8 N | ø1.0 mm | 19.6 N | No remarkable mechanical damage |                  |      |   |       |      |   |                  |      |                                                                               |
|                                     | Terminal diameter                                                                                                                                                                                                                                                                                                                                          | Force                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
|                                     | ø0.6 mm, ø0.8 mm                                                                                                                                                                                                                                                                                                                                           | 9.8 N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
|                                     | ø1.0 mm                                                                                                                                                                                                                                                                                                                                                    | 19.6 N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
|                                     | Robustness of terminations (Bending)                                                                                                                                                                                                                                                                                                                       | The unit shall be secured with its terminal kept vertical and the force specified below shall be applied in the axial direction.<br>The terminal shall gradually be bent by 90 ° in one direction, then 90 ° in the opposite direction, and again back to the original position.<br>The damage of the terminal shall be visually examined.<br><br><table><tr><td>Terminal diameter</td><td>Force</td></tr><tr><td>ø0.6 mm, ø0.8 mm</td><td>4.9 N</td></tr><tr><td>ø1.0 mm</td><td>9.8 N</td></tr></table>                    |                                                                                 | Terminal diameter                      | Force            | ø0.6 mm, ø0.8 mm | 4.9 N | ø1.0 mm | 9.8 N  |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| Terminal diameter                   | Force                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| ø0.6 mm, ø0.8 mm                    | 4.9 N                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| ø1.0 mm                             | 9.8 N                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| Vibration                           | After repeatedly applying a single harmonic vibration (amplitude: 0.75 mm, double amplitude: 1.5 mm) with 1 minute vibration frequency cycles (10 Hz to 55 Hz to 10 Hz) to each of three perpendicular directions for 2 hours. Thereafter, the unit shall be visually examined.                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| Solderability                       | After dipping the terminals to a depth of approximately 3 mm from the body in a soldering bath of 235±5 °C for 2±0.5 seconds, the terminal shall be visually examined.                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Approximately 95 % of the terminals shall be covered with new solder uniformly. |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| Resistance to soldering heat        | After each lead shall be dipped into a solder bath having a temperature of 260±5 °C to a point 2.0 to 2.5 mm from the body of the unit, using shielding board (t=1.5 mm), be held there for 10±1 s and then be stored at room temperature and normal humidity for 1 hour or over. The change of V <sub>CmA</sub> and mechanical damages shall be examined. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | $\Delta V_{CmA}/V_{CmA} \leq \pm 5 \%$                                          |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| Environmental                       | High temperature storage/Dry heat                                                                                                                                                                                                                                                                                                                          | The specimen shall be subjected to 125±2 °C for 1000 hours in a thermostatic bath without load and then stored at room temperature and normal humidity for 1 hour or over. Thereafter, the change of V <sub>CmA</sub> shall be measured.                                                                                                                                                                                                                                                                                     |                                                                                 | $\Delta V_{CmA}/V_{CmA} \leq \pm 5 \%$ |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
|                                     | Humidity                                                                                                                                                                                                                                                                                                                                                   | The specimen shall be subjected to 40±2 °C, 90 to 95 % RH for 1000 hours without load and then stored at room temperature and normal humidity for 1 hour or over. Thereafter, the change of V <sub>CmA</sub> shall be measured.                                                                                                                                                                                                                                                                                              |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
|                                     | Temperature cycle                                                                                                                                                                                                                                                                                                                                          | The temperature cycle shown below shall be repeated five cycles and then stored at room temperature and normal humidity for 1 hour or over. The change of V <sub>CmA</sub> and mechanical damage shall be examined.<br><table><tr><th>Step</th><th>Temperature (°C)</th><th>Period (minutes)</th></tr><tr><td>1</td><td>−40±3</td><td>30±3</td></tr><tr><td>2</td><td>Room temperature</td><td>15±3</td></tr><tr><td>3</td><td>125±2</td><td>30±3</td></tr><tr><td>4</td><td>Room temperature</td><td>15±3</td></tr></table> |                                                                                 | Step                                   | Temperature (°C) | Period (minutes) | 1     | −40±3   | 30±3   | 2                               | Room temperature | 15±3 | 3 | 125±2 | 30±3 | 4 | Room temperature | 15±3 | $\Delta V_{CmA}/V_{CmA} \leq \pm 5 \%$<br><br>No remarkable mechanical damage |
|                                     | Step                                                                                                                                                                                                                                                                                                                                                       | Temperature (°C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Period (minutes)                                                                |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
|                                     | 1                                                                                                                                                                                                                                                                                                                                                          | −40±3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 30±3                                                                            |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
|                                     | 2                                                                                                                                                                                                                                                                                                                                                          | Room temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 15±3                                                                            |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| 3                                   | 125±2                                                                                                                                                                                                                                                                                                                                                      | 30±3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| 4                                   | Room temperature                                                                                                                                                                                                                                                                                                                                           | 15±3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| High temperature load/Dry heat load | After being continuously applied the Maximum Allowable Voltage at 85±2 °C for 1000 hours, the specimen shall be stored at room temperature and normal humidity for 1 hour or over. Thereafter, the change of V <sub>CmA</sub> shall be measured.                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | $\Delta V_{CmA}/V_{CmA} \leq \pm 10 \%$                                         |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| Damp heat load/ Humidity load       | The specimen shall be subjected to 40±2 °C, 90 to 95 % RH and the Maximum Allowable Voltage for 1000 hours and then stored at room temperature and normal humidity for 1 hour or over. Thereafter, the change of V <sub>CmA</sub> shall be measured.                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                 |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |
| Low temperature storage/Cold        | The specimen shall be subjected to −40±2 °C without load for 1000 hours and then stored at room temperature and normal humidity for 1 hour or over. Thereafter, the change of V <sub>CmA</sub> shall be measured.                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | $\Delta V_{CmA}/V_{CmA} \leq \pm 5 \%$                                          |                                        |                  |                  |       |         |        |                                 |                  |      |   |       |      |   |                  |      |                                                                               |

## Minimum quantity / Packing unit

| Product                                   | Series / Type      |                             | Part number              | Minimum quantity<br>/ Packing unit | Packing quantity<br>in carton | Carton (about)<br>L×W×H (mm) |
|-------------------------------------------|--------------------|-----------------------------|--------------------------|------------------------------------|-------------------------------|------------------------------|
| “ZNR”<br>Transient/<br>surge<br>absorbers | D type<br>V series | Straight leads<br><Bulk>    | ERZV05D180 to 271        | 100                                | 10000                         | 210×340×160                  |
|                                           |                    |                             | ERZV05D331 to 471        | 100                                | 10000                         | 210×340×180                  |
|                                           |                    |                             | ERZV07D180 to 470        | 100                                | 10000                         | 210×340×160                  |
|                                           |                    |                             | ERZV07D560 to 680        | 100                                | 10000                         | 210×340×180                  |
|                                           |                    |                             | ERZV07D820 to 121        | 100                                | 10000                         | 210×340×160                  |
|                                           |                    |                             | ERZV07D151 to 271        | 100                                | 10000                         | 210×340×180                  |
|                                           |                    |                             | ERZV07D331 to 511        | 100                                | 5000                          | 210×340×110                  |
|                                           |                    |                             | ERZV09D180 to 121        | 100                                | 5000                          | 210×340×160                  |
|                                           |                    |                             | ERZV09D151 to 271        | 100                                | 4000                          | 210×340×130                  |
|                                           |                    |                             | ERZV09D331 to 511        | 100                                | 4000                          | 210×340×160                  |
|                                           |                    |                             | ERZV10D180 to 121        | 50                                 | 5000                          | 210×340×160                  |
|                                           |                    |                             | ERZV10D151 to 271        | 50                                 | 4000                          | 210×340×130                  |
|                                           |                    |                             | ERZV10D331 to 621        | 50                                 | 4000                          | 210×340×160                  |
|                                           |                    |                             | ERZV10D681 to 821        | 50                                 | 2000                          | 210×340×110                  |
|                                           |                    |                             | ERZV10D911 to 112        | 50                                 | 2000                          | 210×340×110                  |
|                                           |                    |                             | ERZV10D182CS             | 50                                 | 1000                          | 210×340×*80                  |
|                                           |                    |                             | ERZV14D180 to 121        | 50                                 | 3000                          | 210×340×130                  |
|                                           |                    |                             | ERZV14D151 to 271        | 50                                 | 3000                          | 210×340×130                  |
|                                           |                    |                             | ERZV14D331 to 621        | 50                                 | 2000                          | 210×340×130                  |
|                                           |                    |                             | ERZV14D681 to 821        | 50                                 | 2000                          | 210×340×130                  |
|                                           |                    |                             | ERZV14D911 to 112        | 50                                 | 1000                          | 210×340×110                  |
|                                           |                    |                             | ERZV14D182CS             | 50                                 | 1000                          | 210×340×110                  |
|                                           |                    |                             | ERZV20D180 to 271        | 50                                 | 2000                          | 210×340×160                  |
|                                           |                    |                             | ERZV20D331 to 511        | 50                                 | 1000                          | 210×340×110                  |
|                                           |                    |                             | ERZV20D561 to 821        | 50                                 | 1000                          | 210×340×130                  |
|                                           |                    |                             | ERZV20D911 to 112        | 50                                 | 1000                          | 210×340×130                  |
|                                           |                    |                             | ERZV20D182               | 25                                 | 500                           | 210×340×130                  |
|                                           |                    | Leads cut type<br><Bulk>    | ERZV05D(V)180CS to 271CS | 100                                | 10000                         | 210×340×*80                  |
|                                           |                    |                             | ERZV05D(V)331CS to 471CS | 100                                | 10000                         | 210×340×110                  |
|                                           |                    |                             | ERZV07D(V)180CS to 271CS | 100                                | 10000                         | 210×340×*80                  |
|                                           |                    |                             | ERZV07D(V)331CS to 511CS | 100                                | 10000                         | 210×340×110                  |
|                                           |                    |                             | ERZV09D(V)180CS to 121CS | 100                                | 5000                          | 210×340×110                  |
|                                           |                    |                             | ERZV09D(V)151CS to 511CS | 100                                | 4000                          | 210×340×*80                  |
|                                           |                    |                             | ERZV10D(V)180CS to 121CS | 100                                | 5000                          | 210×340×110                  |
|                                           |                    |                             | ERZV10D(V)151CS to 621CS | 100                                | 4000                          | 210×340×*80                  |
|                                           |                    |                             | ERZV10D(V)681CS to 751CS | 100                                | 2000                          | 210×340×*80                  |
|                                           |                    |                             | ERZV10D(V)821C1 to 112C1 | 100                                | 2000                          | 210×340×*80                  |
|                                           |                    |                             | ERZV14D(V)180CS to 271CS | 100                                | 3000                          | 210×340×*80                  |
|                                           |                    |                             | ERZV14D(V)331CS to 821C1 | 100                                | 2000                          | 210×340×*80                  |
|                                           |                    |                             | ERZV14D(V)911C1 to 112C1 | 100                                | 1000                          | 210×340×*80                  |
|                                           | D type<br>V series | Straight leads<br>and taped | ERZVA5D180 to 271        | 1000                               | 10000                         | 360×320×260                  |
|                                           |                    |                             | ERZVA5D331 to 471        | 1000                               | 10000                         | 400×360×260                  |
|                                           |                    |                             | ERZVA7D180 to 271        | 1000                               | 10000                         | 400×360×260                  |
|                                           |                    |                             | ERZVA7D331 to 511        | 1000                               | 10000                         | 470×360×260                  |
|                                           |                    |                             | ERZVA9D180 to 271        | 1000                               | 10000                         | 400×360×260                  |
|                                           |                    |                             | ERZVA9D331 to 511        | 1000                               | 10000                         | 470×360×260                  |
|                                           |                    |                             | ERZVGAD180 to 621        | 1000                               | 5000                          | 360×310×320                  |
|                                           |                    |                             | ERZVGAD681 to 112        | 500                                | 2500                          | 360×270×320                  |
|                                           |                    |                             | ERZVGED180 to 511        | 500                                | 2500                          | 360×310×320                  |
|                                           |                    |                             | ERZVGED561 to 112        | 250                                | 1250                          | 360×270×320                  |
|                                           |                    | Crimped lead<br>and taped   | ERZVA5V180 to 271        | 1000                               | 10000                         | 360×320×260                  |
|                                           |                    |                             | ERZVA5V331 to 471        | 1000                               | 10000                         | 400×360×260                  |
|                                           |                    |                             | ERZVA7V180 to 271        | 1000                               | 10000                         | 400×360×260                  |
|                                           |                    |                             | ERZVA7V331 to 511        | 1000                               | 10000                         | 470×360×260                  |
|                                           |                    |                             | ERZVA9V180 to 271        | 1000                               | 10000                         | 400×360×300                  |
|                                           |                    |                             | ERZVA9V331 to 511        | 1000                               | 10000                         | 470×360×300                  |
|                                           |                    |                             | ERZVEAV180 to 621        | 1000                               | 5000                          | 360×310×320                  |
|                                           |                    |                             | ERZVEAV681 to 112        | 500                                | 2500                          | 360×270×320                  |
|                                           |                    |                             | ERZVEEV180 to 511        | 500                                | 2500                          | 360×310×320                  |
|                                           |                    |                             | ERZVEEV561 to 112        | 250                                | 1250                          | 360×270×320                  |

Part No., quantity and country of origin are designated on outer packages in English.

※ Please contact local sales office about packing specifications.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.

Should a safety concern arise regarding this product, please be sure to contact us immediately.

## Safety and Legal Matters to Be Observed

### Product specifications and applications

- Please be advised that this product and product specifications are subject to change without notice for improvement purposes. Therefore, please request and confirm the latest delivery specifications that explain the specifications in detail before the final design, or purchase or use of the product, regardless of the application. In addition, do not use this product in any way that deviates from the contents of the company's delivery specifications.
- Unless otherwise specified in this catalog or the product specifications, this product is intended for use in general electronic equipment (AV products, home appliances, commercial equipment, office equipment, information and communication equipment, etc.).  
When this product is used for the following special cases, the specification document suited to each application shall be signed/sealed (with Panasonic Industry and the user) in advance..These include applications requiring special quality and reliability, wherein their failures or malfunctions may directly threaten human life or cause harm to the human body (e.g.: space/aircraft equipment, transportation/traffic equipment, combustion equipment, medical equipment, disaster prevention/crime prevention equipment, safety equipment, etc.).

### Safety design and product evaluation

- Please ensure safety through protection circuits, redundant circuits, etc., in the customer's system design so that a defect in our company's product will not endanger human life or cause other serious damage.
- This catalog shows the quality and performance of individual parts. The durability of parts varies depending on the usage environment and conditions. Therefore, please ensure to evaluate and confirm the state of each part after it has been mounted in your product in the actual operating environment before use.  
If you have any doubts about the safety of this product, then please notify us immediately, and be sure to conduct a technical review including the above protection circuits and redundant circuits at your company.

### Laws / Regulations / Intellectual property

- The transportation of dangerous goods as designated by UN numbers, UN classifications, etc., does not apply to this product. In addition, when exporting products, product specifications, and technical information described in this catalog, please comply with the laws and regulations of the countries to which the products are exported, especially those concerning security export control.
- Each model of this product complies with the RoHS Directive (Restriction of the use of hazardous substances in electrical and electronic equipment) (2011/65/EU and (EU) 2015/863). The date of compliance with the RoHS Directive and REACH Regulation varies depending on the product model.  
Further, if you are using product models in stock and are not sure whether or not they comply with the RoHS Directive or REACH Regulation, please contact us by selecting "Sales Inquiry" from the inquiry form.
- During the manufacturing process of this product and any of its components and materials to be used, Panasonic Industry does not intentionally use ozone-depleting substances stipulated in the Montreal Protocol and specific bromine-based flame retardants such as PBBs (Poly-Brominated Biphenyls) / PBDEs (Poly-Brominated Diphenyl Ethers). In addition, the materials used in this product are all listed as existing chemical substances based on the Act on the Regulation of Manufacture and Evaluation of Chemical Substances.
- With regard to the disposal of this product, please confirm the disposal method in each country and region where it is incorporated into your company's product and used.
- The technical information contained in this catalog is intended to show only typical operation and application circuit examples of this product. This catalog does not guarantee that such information does not infringe upon the intellectual property rights of Panasonic Industry or any third party, nor imply that the license of such rights has been granted.
- Design, materials, or process related to technical owned by Panasonic Industry are subject to change without notice.

**Panasonic Industry will assume no liability whatsoever if the use of our company's products deviates from the contents of this catalog or does not comply with the precautions. Please be advised of these restrictions.**

## Matters to Be Observed When Using This Product

(D-type : V series / SMD-type : HF·VF series)

### Safety measures

An abnormal state for varistors (ZNR surge absorbers) of the D type/V series and SMD-Type/HF, VF Series (hereinafter the product or "the surge absorber") that results from a problem with service conditions (materials used, the surrounding environment, power conditions, circuit conditions, etc.) may cause a fire accident, electric shock accident, burn accident, or product failure. Matters to note when handling this product will hereinafter be described. What is described below should be checked sufficiently before the product is used.

#### ■ Confirming rated capabilities

Use the surge absorber within the range of its rated capabilities. Each type of surge absorber has specified rated capabilities including a maximum allowable circuit voltage, a surge current tolerance, an energy tolerance, an impulse lifespan (surge lifespan), average pulse power, and a service temperature. Using the surge absorber under severe service conditions that are beyond the rated capabilities causes degraded performance of the surge absorber or destruction of a circuit element, which may lead to smoke generation, ignition, etc.

#### ■ Take the following measures in order to avoid an accident caused by expected phenomenon.

(1) Destruction of the surge absorber may scatter its fractured pieces around. To protect other elements from these pieces, set product in a case or shield it with a cover.

(2) Do not place the surge absorber near combustible materials (vinyl cable, resin mold, etc.). If avoiding the vicinity of combustible materials is difficult, protect the combustible material with an incombustible cover.

(3) Surge absorber placed between lines

When the surge absorber is placed between lines, connect a normal type current fuse in series with the surge absorber.

\* See "Current fuse" in the "Circuit design and circuit board design" section.

(4) Surge absorber placed between a line and the ground

① When the surge absorber is placed between a line and the ground, even if the surge absorber short-circuits, ground resistance will remain in the section between the line and the ground, leaving a possibility that the current fuse won't blow, in which case the outer sheath resin of the surge absorber may generate smoke or ignite due to current flow. To prevent such a case, place an earth leakage breaker in a location closer to the power supply than the surge absorber. When not using an earth leakage breaker, use a current fuse and temperature fuse in series with each other.

\* See Table 1 in the "Circuit design and circuit board design" section.

② When the surge absorber is placed between a live part and a metal case, it may cause electric shock if the surge absorber short-circuits. To avoid this, ground the metal case or shield it to prevent direct contact with the metal case.

#### ■ In case the surge absorber should short-circuit and generate smoke or ignite, immediately cut off current flow to the surge absorber.

#### ■ Rated voltage for UL certification, etc.

To allow the surge absorber to meet leak current requirements, etc., a maximum allowable circuit voltage and rated voltage are specified for the surge absorber.

When applying for UL certification, etc. of a device equipped with a surge absorber, ensure the working voltage of the device does not exceed the rated voltage of the surge absorber.

#### ■ An unexpected sharp rise in the working voltage, an incoming excessive surge, etc., may cause the surge absorber to generate smoke or ignite.

In such a case, fire spreading through the device should be prevented to avoid expanded damage. To achieve this, take a multi-protection measure, such as adopting fire-resistant materials that make up the outer shell components and structural materials.

## Use environments and cleaning conditions

- Do not use the surge absorber in an outdoor environment where the surge absorber is exposed to sunlight.
- Do not use the surge absorber in which direct sunlight hits the surge absorber or near a heating element where the temperature of the surge absorber would rise above its working temperature.
- Do not use the surge absorber in a place where the surge absorber is exposed to wind or rain or a highly humid place where steam is emitted or dew concentrates.
- Do not use the surge absorber in a place filled with dust or salt, in an atmosphere contaminated with a corrosive gas, etc., or in liquids such as water, oil, chemical, or organic solvents.
- Do not wash the surge absorber with a solvent (thinner, acetone, etc.) that damages the outer sheath resin.

## Response to anomalies and handling conditions

Be careful not to drop the surge absorber on the floor, etc. The product is likely to suffer mechanical or electrical damage when dropped on the floor. Avoid using such a product.

## Reliability

A capacitor conforming to "AEC-Q200" refers to a capacitor having passed some or all of evaluation test items defined in AEC-Q200.

To know the detailed specifications of each capacitor or specific evaluation test scores, please contact us.

We issue a delivery specification sheet for each product ordered. Please confirm the delivery specification sheet when you place an order with us.

## Circuit design and circuit board design

Meet the following requirements. Not following the requirements can result in a shorter lifespan of the surge absorber or its failure.

- Choose a surge absorber whose maximum allowable circuit voltage has a margin relative to the maximum voltage range including source voltage fluctuations.

\* See Table 1 in the "Circuit design and circuit board design" section.

- When surges are applied intermittently to the surge absorber at short intervals (when pulses of voltages are applied in a noise simulator test, etc.), make sure that the surge power does not exceed the maximum average pulse power of the surge absorber.
- The product numbers of recommended surge absorbers to choose are shown in Table 1.

(1) The case of placing the surge absorber between lines

When the source voltage is expected to rise temporarily due to unbalanced single-wire loads in a three-phase three-wire connection configuration, a short circuit between a voltage line and a neutral line, loss of the neutral line, or resonance of a capacitive load caused by switching on/off, use a surge absorber (varistor) indicated by "\*" in Table 1.

(2) The case of placing the surge absorber between a line and the ground

Line-to-ground voltage may rise with a single-wire ground fault, etc. Use a recommended surge absorber in Table 1 that is different from the surge absorber placed between lines. When the device is subjected to an insulation resistance test (500 V DC), use a D-type surge absorber indicated by "\*" in Table 1.

According to "Electrical Appliance Technical Standards" based on the Electrical Appliance and Material Safety Act, when using a varistor voltage which would fail the insulation performance test, the surge absorber may be removed from the device when being subjected to the test, depending on circuit test conditions.

\* See attached table 4, appendix 4, "Electrical Appliance Technical Standards" based on the Electrical Appliance and Material Safety Act.

When conducting a withstand voltage test (1000 V AC or 1200 V AC) of the device, use the recommended D type / V series surge absorber indicated by "\*\*\*\*" in Table 1.

■ Current fuse

- (1) Select a surge absorber and the rated current for a current fuse to be used in a manner shown in the following table. Confirm that no secondary accident arises when the surge absorber in an actual circuit breaks. Selected rated currents of current fuses shown in the following table are exemplary one and may vary depending on circuit conditions used. Confirm the rated current by a test, etc., before using the current fuse.

<Rated currents of current fuses for the D-type / V series surge absorber>

|                         |            |            |            |            |            |            |
|-------------------------|------------|------------|------------|------------|------------|------------|
| Standard product number | ERZV05D□□□ | ERZV07D□□□ | ERZV09D□□□ | ERZV10D□□□ | ERZV14D□□□ | ERZV20D□□□ |
| Rating current          | 3 A max.   | 5 A max.   | 7 A max.   | 7 A max.   | 10 A max.  | 10 A max.  |


\* Use the rated voltage of the current fuse that corresponds to the circuit voltage of a circuit including the current fuse.

<Rated current of a current fuse for the SMD-type / VF series surge absorber>

|                         |            |
|-------------------------|------------|
| Standard product number | ERZVF□M□□□ |
| Rating current          | 5 A max.   |

- \* Use the rated voltage of the current fuse that corresponds to the circuit voltage of a circuit including the current fuse.
- \* For the HF series surge absorber, select the rated current of the fuse after confirming the way the fuse handles a load dump surge and the protective coordination action it makes when the surge absorber is destroyed.

- (2) Recommended parts where fuses are connected are shown in Table 1. When a load current to a protected device is so large as to exceed the rated current of the fuse, however, connect the fuse in a location shown in the following diagram.

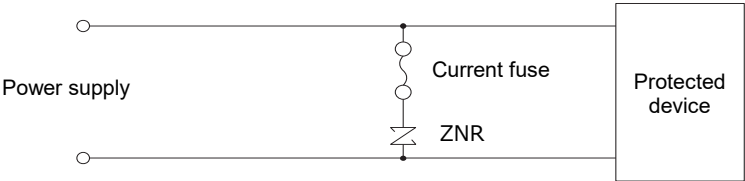

■ Temperature fuse

When connecting the surge absorber to a temperature fuse, choose a connection method and a temperature fuse that allow fine thermal coupling between the surge absorber and the temperature fuse.

Table 1 Application example of the product (ordinary application example)

Connection

Surge absorber placed between lines

Surge absorber placed between a line and the ground

DC  
Single-phase AC

DC  
Single-phase AC

Three-phase AC

Three-phase AC

Varistor voltage selection

| ZNR            | Power supply voltage [AC] | Nominal varistor voltage |             |
|----------------|---------------------------|--------------------------|-------------|
|                |                           | D-type                   | SMD-type    |
| ZNR 1<br>ZNR 3 | 100 V                     | 201 to 361*              | 201 to 361* |
|                | 120 V                     | 241 to 431*              | 241 to 431* |
|                | 200 V                     | 471 to 621*              | 471         |
|                | 220 V                     | 471 to 621*              | 471         |
|                | 240 V                     | 511, 621*                | -           |
|                | 380 V                     | 751, 821*                | -           |

| ZNR            | Power supply voltage [AC] | Nominal varistor voltage |          |
|----------------|---------------------------|--------------------------|----------|
|                |                           | D-type                   | SMD-type |
| ZNR 2<br>ZNR 4 | 100 V<br>220 V            | 471                      | 471      |
|                |                           | 511                      | -        |
|                |                           | 621*                     | -        |
|                |                           | 821 or higher**          | -        |
|                |                           | 182***                   | -        |
|                | 230 V                     | 511                      | -        |
|                |                           | 621*                     | -        |
|                |                           | 821 or higher**          | -        |
|                |                           | 182**                    | -        |
|                | 380 V                     | 112**                    | -        |
|                |                           | 182***                   | -        |
|                |                           | -                        | -        |

\* Choose the element size while taking surge conditions into consideration.

## Processing conditions

- Do not apply vibration, impact (drop impact, etc.), or pressure strong enough to crack the outer sheath resin or absorber body of the surge absorber.
- When coating the surge absorber with a resin or embedding it in a resin mold, avoid using a resin that degrades the surge absorber.
- Do not bend or apply a force to the lead of a D-type surge absorber close to the outer sheath resin.

## Mounting and storage conditions

- When soldering the surge absorber, follow recommended soldering conditions shown in the following table so that solder or the insulation material making up the surge absorber is not melted.
- When making holes for mounting the surge absorber on the board, check the dimensions of the holes on the board, referencing the central point of the interval between the leads.  
Because the overall dimensional tolerance is large, forming the holes with high precision requires careful processing.




|          | Soldering method                                           | Recommended conditions                                  | Mater to note                                                                                                                       |
|----------|------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| D-type   | Flow soldering<br>(solder bath immersion method)           | 260 °C, 10 seconds or less                              | The D-type surge absorber should not be soldered by reflow soldering.                                                               |
| SMD-type | Flow soldering<br>(solder bath immersion method)           | 260 °C, 10 seconds or less                              | A high component mounting density may lead to poor solderability. In such a case, consider vent hole formation.                     |
|          | Reflow soldering<br>(controlled atmosphere heating method) | Refer to the recommended soldering temperature profile. | When a land is excessively larger than the terminal surface of a component, the component may shift position when solder is melted. |

Note 1: Soldering the surge absorber under soldering conditions different from the recommended soldering conditions requires extra checking to ensure it won't cause any problems.  
Additional soldering is allowed only once. It must be done within 5 seconds, with the soldering iron temperature kept at 400 °C or lower.

Note 2: A temperature profile may include a large error, depending on the measurement method used.  
Be careful in such cases.

Note 3: Board temperatures vary depending on the sizes of boards and mounting densities. Confirm the temperature for each type of board.

### <Recommended soldering temperature profile>

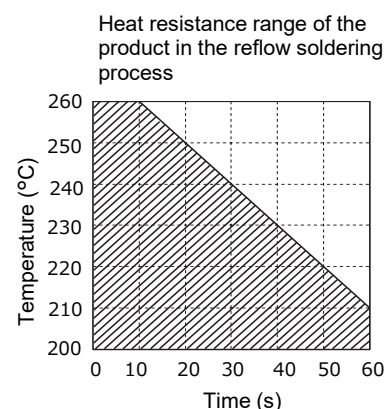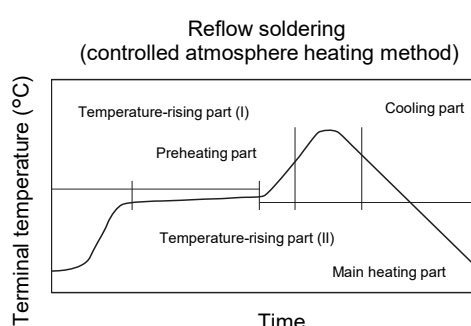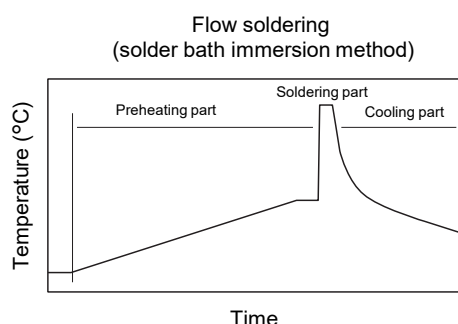

|                 |                                                           |                     |
|-----------------|-----------------------------------------------------------|---------------------|
| Preheating part | Normal temperature to 130 °C                              | 120 seconds or less |
| Soldering part  | 260 °C or less                                            | 10 seconds or less  |
| Cooling part    | Gradual cooling<br>(cooling under the normal temperature) |                     |

|                            |                                                                                    |                      |
|----------------------------|------------------------------------------------------------------------------------|----------------------|
| Temperature-rising part I  | Normal temperature to preheating temperature                                       | 30 to 60 seconds     |
| Preheating part            | 150 °C to 180 °C                                                                   | 60 to 120 seconds    |
| Temperature-rising part II | Preheating temperature to 200 °C                                                   | 2 to 6 °C per second |
| Main heating part          | Refer to the heat resistance range of the product in the reflow soldering process. |                      |
| Cooling part               | 200 °C to 100 °C                                                                   | 1 to 4 °C per second |

\* Do not perform reflow soldering more than two times.

- Mounting the surge absorber (SMD-type)  
When mounting the surge absorber on the board, make sure that no excessive impact or load, such as pressure from a suction nozzle for mounting the absorber, positional shift, or mechanical impact/stress caused by a positioning of the absorber, is applied to the surge absorber. There are cases where the surge absorber shifts from its intended position when mounted on the board. In such cases, consider a method of bonding the board and the outer sheath resin together.
- Do not keep the product in a high-temperature or high-humidity condition. Keep the surge absorber in a room with a temperature of 40 °C or lower and a relative humidity of 75% or lower and use the surge absorber within two years of storage. Check the solderability of a surge absorber stored for a long period (two years or more) before using the surge absorber.
- Keep the surge absorber in a place where no corrosive gas atmosphere (hydrogen sulfide, sulfurous acid, chlorine, ammonia, etc.) is present.
- Keep the surge absorber in a place where the surge absorber is protected from direct sunlight, dew concentration, etc.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 View [ERZ-V07D431](#) on WIN SOURCE

 [Panasonic](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management