



THE DATASHEET OF
2N5460



2N5460
2N5461
2N5462

SILICON
P-CHANNEL JFETS



www.centrasemi.com

The CENTRAL SEMICONDUCTOR 2N5460, 2N5461, and 2N5462 are silicon P-Channel JFETs designed for low level amplifier applications.



TO-92 CASE

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Drain-Gate Voltage
Reverse Gate-Source Voltage
Continuous Gate Current
Power Dissipation
Operating and Storage Junction Temperature

SYMBOL

V_{DG} 40
 V_{GSR} 40
 I_G 10
 P_D 310
 T_J, T_{stg} -65 to +150

UNITS

V
V
mA
mW
 $^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N5460		2N5461		2N5462		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
I_{GSS}	$V_{GS}=20\text{V}$	-	5.0	-	5.0	-	5.0	nA
I_{GSS}	$V_{GS}=20\text{V}, T_A=100^\circ\text{C}$	-	1.0	-	1.0	-	1.0	μA
I_{DSS}	$V_{DS}=15\text{V}, f=1.0\text{kHz}$	1.0	5.0	2.0	9.0	4.0	16	mA
BV_{GSS}	$I_G=10\mu\text{A}$	40	-	40	-	40	-	V
V_{GS}	$V_{DS}=15\text{V}, I_D=0.1\text{mA}$	0.5	4.0	-	-	-	-	V
V_{GS}	$V_{DS}=15\text{V}, I_D=0.2\text{mA}$	-	-	0.8	4.5	-	-	V
V_{GS}	$V_{DS}=15\text{V}, I_D=0.4\text{mA}$	-	-	-	-	1.5	6.0	V
$V_{GS(OFF)}$	$V_{DS}=15\text{V}, I_D=1.0\mu\text{A}$	0.75	6.0	1.0	7.5	1.8	9.0	V
$ y_{fs} $	$V_{DS}=15\text{V}, V_{GS}=0, f=1.0\text{kHz}$	1.0K	4.0K	1.5K	5.0K	2.0K	6.0K	μS
$ y_{os} $	$V_{DS}=15\text{V}, V_{GS}=0, f=1.0\text{kHz}$	-	75	-	75	-	75	μS
C_{rss}	$V_{DS}=15\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	2.0	-	2.0	-	2.0	pF
C_{iss}	$V_{DS}=15\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	7.0	-	7.0	-	7.0	pF
e_N	$V_{DS}=15\text{V}, V_{GS}=0, f=100\text{Hz}, \text{BW}=1.0\text{Hz}$	-	115	-	115	-	115	$\text{nV}/\sqrt{\text{Hz}}$
NF	$V_{DS}=15\text{V}, V_{GS}=0, f=100\text{Hz}, R_G=1.0\text{M}\Omega, \text{BW}=1.0\text{Hz}$	-	2.5	-	2.5	-	2.5	dB


R1 (25-January 2016)

2N5460
 2N5461
 2N5462

SILICON
 P-CHANNEL JFETS



TO-92 CASE - MECHANICAL OUTLINE

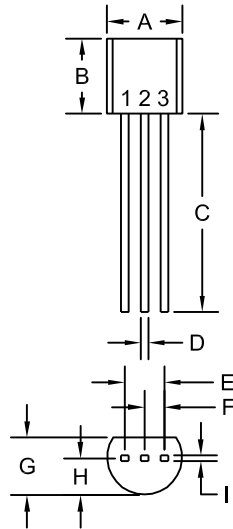

R1

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

LEAD CODE:

- 1) Drain
- 2) Source
- 3) Gate

MARKING:

FULL PART NUMBER

R1 (25-January 2016)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com



Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 2N5460 on WIN SOURCE](#)
-  [Central Semiconductor Corp Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management