



# SAW multimedia filters

## Series/Type: **K9356M**

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39389K9356M100		2011-01-14	2011-09-30	2012-09-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at [www.epcos.com/sales](http://www.epcos.com/sales).

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

**SAW Components**
**K 9356 M**
**IF Filter for Audio Applications**
**38,90 MHz**
**Data Sheet**
**Standard**


- B/G
- D/K
- I
- L

**Features**

- TV IF audio filter with passband for sound carriers at 32,40 MHz (D/K, L), 32,90 MHz (I) and 33,40 MHz (B/G)

**Terminals**


- Tinned CuFe alloy

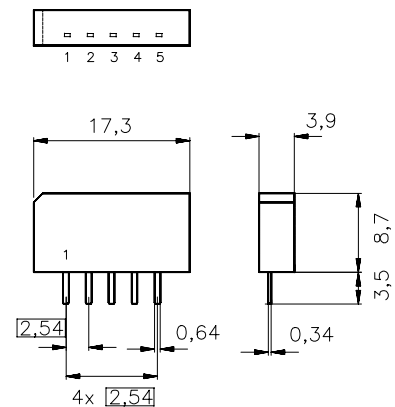 Plastic package **SIP5K**


Dimensions in mm, approx. weight 1,0 g

**Pin configuration**

- |   |                       |
|---|-----------------------|
| 1 | Input                 |
| 2 | Input - ground        |
| 3 | Chip - carrier ground |
| 4 | Output                |
| 5 | Output                |



Type	Ordering code	Marking and package according to	Packing according to
K 9356 M	B39389-K9356-M100	C61157-A1-A15	F61074-V8067-Z000

**Maximum ratings**

Operable temperature range	$T_A$	-25/+65	°C	
Storage temperature range	$T_{stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	5	V	between any terminals
AC voltage	$V_{pp}$	10	V	between any terminals

**SAW Components**
**K 9356 M**
**IF Filter for Audio Applications**
**38,90 MHz**
**Data Sheet**
**Characteristics**

Reference temperature:

$T_A = 25\text{ °C}$

Terminating source impedance:

$Z_S = 50\ \Omega$



Terminating load impedance:

$Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
<b>Insertion attenuation</b>					
	$\alpha$				
Reference level for the following data	33,40 MHz	9,1	10,6	12,1	dB
<b>Relative attenuation</b>					
	$\alpha_{\text{rel}}$				
Sound carrier	32,40 MHz	-1,4	-0,4	0,6	dB
	32,90 MHz	-0,9	0,1	1,1	dB
	33,05 MHz	-0,5	0,5	1,5	dB
Picture carrier	38,90 MHz	40,0	47,0	—	dB
Color carrier	34,47 MHz	33,0	40,0	—	dB
Adjacent picture carrier	30,90 MHz	40,0	55,0	—	dB
	31,90 MHz	9,5	12,0	—	dB
Adjacent sound carrier	40,40 MHz	46,0	54,0	—	dB
	40,90 MHz	46,0	61,0	—	dB
	41,40 MHz	46,0	60,0	—	dB
Lower sidelobe	25,00 ... 30,90 MHz	34,0	38,0	—	dB
Upper sidelobe	38,90 ... 75,00 MHz	35,0	41,0	—	dB
<b>Impedance at 33,40 MHz</b>					
	Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$	—	0,7 $\parallel$ 11,6	—	k $\Omega$ $\parallel$ pF
	Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$	—	2,3 $\parallel$ 2,6	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-72	—	ppm/K

Data Sheet

Frequency response

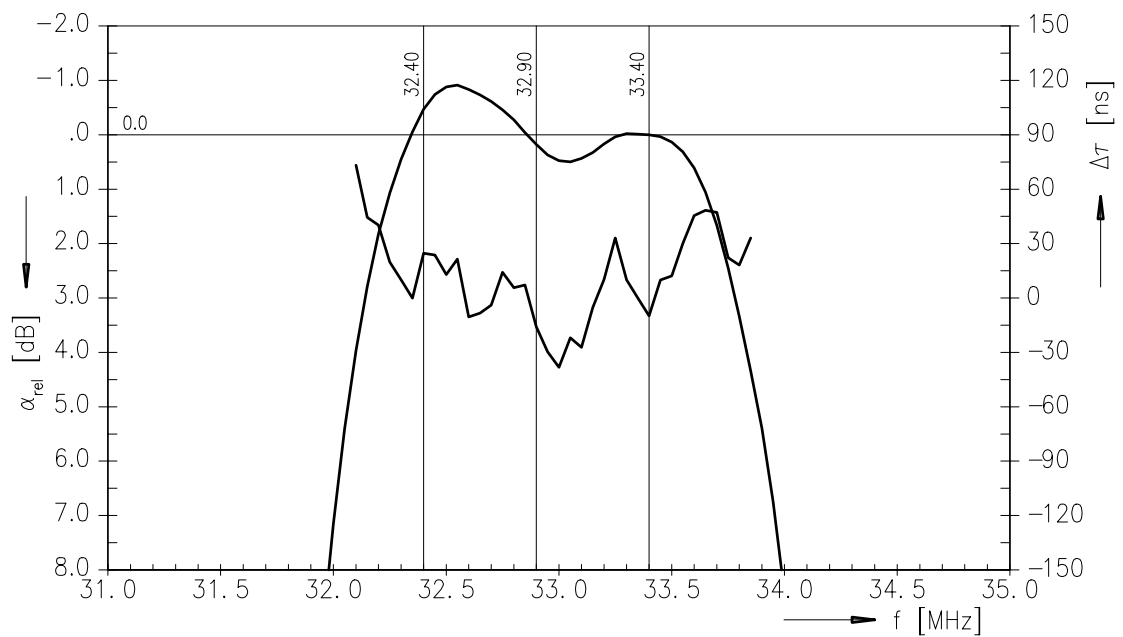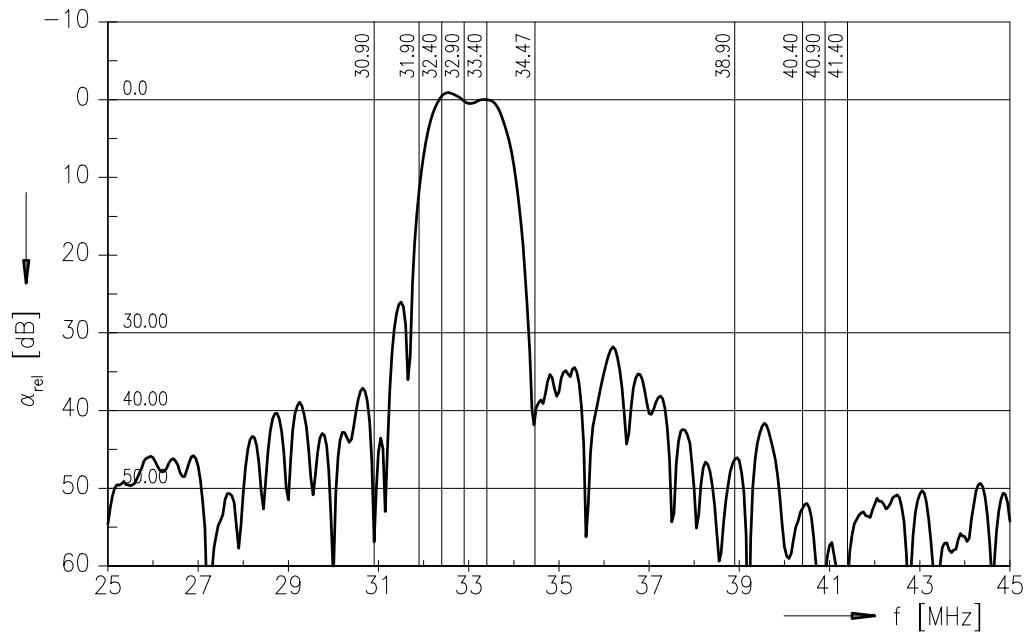

**SAW Components**

**K 9356 M**

**IF Filter for Audio Applications**

**38,90 MHz**

**Data Sheet**

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW CE MM PD**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.



Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View K9356M on WIN SOURCE](#)
-  [EPCOS \(TDK\) Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management