



THE DATASHEET OF
1241.7036.1184000





Metal Switch with Ceramic Actuator, Switching Voltage up to 30 VDC / 250 VAC

new



MSM 19 CS BL blue



MSM 19 CS LE BL blue
Lettering Example for Positive Lettering



MSM 19 CS LE BL red
Lettering Example for Negative Lettering



MSM 22 CS ST



Description

The housing of the MSM CS is made of high-quality stainless steel, the actuator is made of highly durable ceramic. The actuator material of the MSM CS is resistant to scratches, abrasion, impact and chemicals. The non-illuminated version has a translucent white actuating surface. Lettering is black and is applied directly onto the ceramic material. Due to the base material and the lettering process, the lettering is resistant to scratches and to common cleaning agents. In the case of switches designed with illumination, the actuator surface fully illuminates uniformly across the entire surface. Lettering and symbols can also be applied. The standard black lettering provides a positive effect against the illuminated actuator, while negative lettering provides an inverse effect. The MSM CS is extremely robust and meets vandal-proof demands due to the low profile of the front structure (1.7 mm), the IP 69K protection class and the high level of impact resistance (IK 07). The switch is available in 19 mm and 22 mm mounting diameters. Different contact configurations are offered over a range of 30 VDC to 250 VAC for the admissible switching voltage; switching currents are permissible from 0.1 to 10 Amperes. The MSM CS is equipped with quick connect terminals to allow for fast connections.

Characteristics

- For switching voltages up to 30 VDC / 250 VAC
- Backlighted illumination, the actuator surface fully illuminates uniformly
- With an actuator made of highly durable ceramic
- High quality stainless steel
- Standard or customer-specific lettering possible

Other versions

version as momentary action switch, type: MSM
version as switch with two separated switching contacts, type: MSM DP
version as latching action switch, type: MSM LA

References

General Product Information:
http://www.schurter.com/product_information

Weblinks

Approvals: <http://www.schurter.com/approvals>
RoHS: <http://www.schurter.com/rohs>
CHINA-RoHS: <http://www.schurter.com/china-rohs>
e-Store: <http://www.schurter.ch/store/store.asp>
SCHURTER-Stock-Check: <http://www.schurter.com/stockcheck>
Distributor-Stock-Check: <http://www.schurter.ch/catalog/querydist.asp>

Technical Data

Electrical Data

| | |
|---|-----------|
| Switching Voltage max. [VDC] | 30 |
| Switching Voltage max. [VAC] | 125 / 250 |
| Switching Current max. [A AC] | 5 / 3 |
| Lifetime | 1.5 |
| (at 160 mA / 48 VDC) [mill.] | |
| Lifetime (at Rated Breaking Capacity) [mill.] | 0.2 |
| Duration of Bounce [ms] | < 5 |
| Supply Voltage | 24 |
| Ring Illumination [VDC] | |

* Degree of protection refers to the area of the movable actuator.

Mechanical Data

| | |
|--------------------------------|-------|
| Actuating Force [N] | 4.5 |
| Actuating Travel [mm] | 1.0 |
| IK-Shock Protection Class [IK] | IK 07 |

Climatical Data


| | |
|--|----------------|
| Operating and Storage Temperature [°C] | -25 to +85 |
| IP Protection Class | IP 40 |
| Front Side mechanical * [IP] | |
| IP Protection Class | IP 65 / IP 69K |
| Front Side Contact Area [IP] | |
| IP Protection Class | IP 40 / IP 67 |
| Rear Side Contact Area [IP] | |

PART NUMBER

| Mounting Diameter | [mm] | Ø 19 | Ø 22 |
|-------------------|------|-------------------|-------------------|
| ST (Standard) | | 1241.7021.1120000 | 1241.7031.1120000 |
| LE (Lettering) * | | 1241.7022.1120XXX | 1241.7032.1120XXX |
| Backlighted red | | 1241.7026.1121XXX | 1241.7036.1121XXX |
| Backlighted green | | 1241.7026.1122XXX | 1241.7036.1122XXX |
| Backlighted blue | | 1241.7026.1124XXX | 1241.7036.1124XXX |

* For lettering, the XXX should be replaced with your selection from the lettering index, 000 is the version without lettering.

The part numbers refer to the electrical rating max. 5 A / 125 VAC oder 3 A / 250 VAC. For further electrical ratings the specified part number has to be adjusted accordingly:

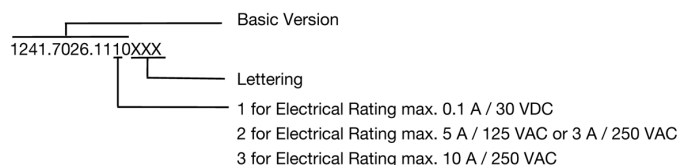

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1241.7036.1184000 on WIN SOURCE](#)

 [Schurter Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management