



**THE DATASHEET OF
D248-9STT**



This version (03 Jul 2018 04:59) was *approved* by Ramparo. The Previously approved version (06 Jun 2018 03:02) is available. 🌐


-Table of Contents

- EVAL-CN0410-ARDZ Shield
 - Connectors and Jumper Configurations
 - Chip Select
 - LED Connectors
 - CFTL-LED-Bar Connectors
 - Transmit/Receive Connector
 - Schematic, PCB Layout, Bill of Materials
 - Software

EVAL-CN0410-ARDZ Shield

CN0410 is an Arduino compatible shield that is optimized for smart agriculture to control current passing through LED's. The CN0410 is used along the the CFTL-LED Bar that has LED's with specific wavelengths that plants utilize.


The circuit shown below is a complete 3-channel single-supply, 16-bit unbuffered voltage output DAC that maintains ± 2 LSB integral and differential nonlinearity by utilizing a CMOS DAC. This circuit has a voltage to current conversion that controls the amount of current passing through an LED by using a MOSFET in its configuration. The circuit also has an isoSPI repeater that allows multiple boards to be controlled with a single master.

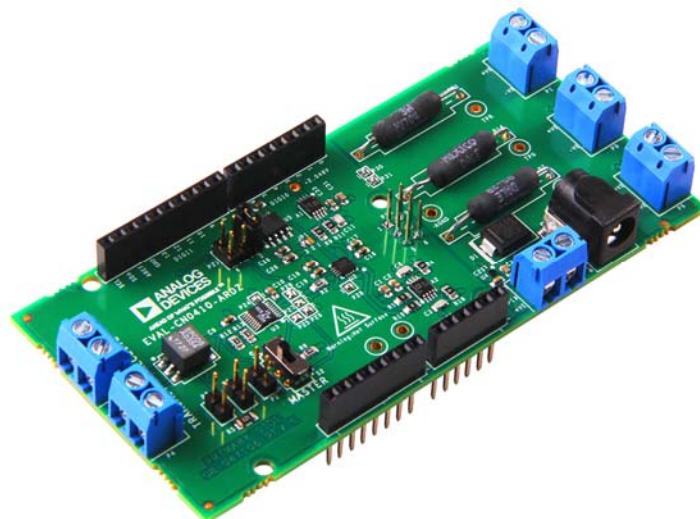

Connectors and Jumper Configurations

Chip Select

The chip select pin of the AD5686 is hardware configurable and routed to 3 general purpose I/O pins on the board. Use the table below to change the location of the chip select simply by moving the shunt on P21, and ensuring the software is configured the same way. By default the chip select is located on GPIO 8. This feature allows multiple boards using SPI communications protocol to be stacked on top of each other.

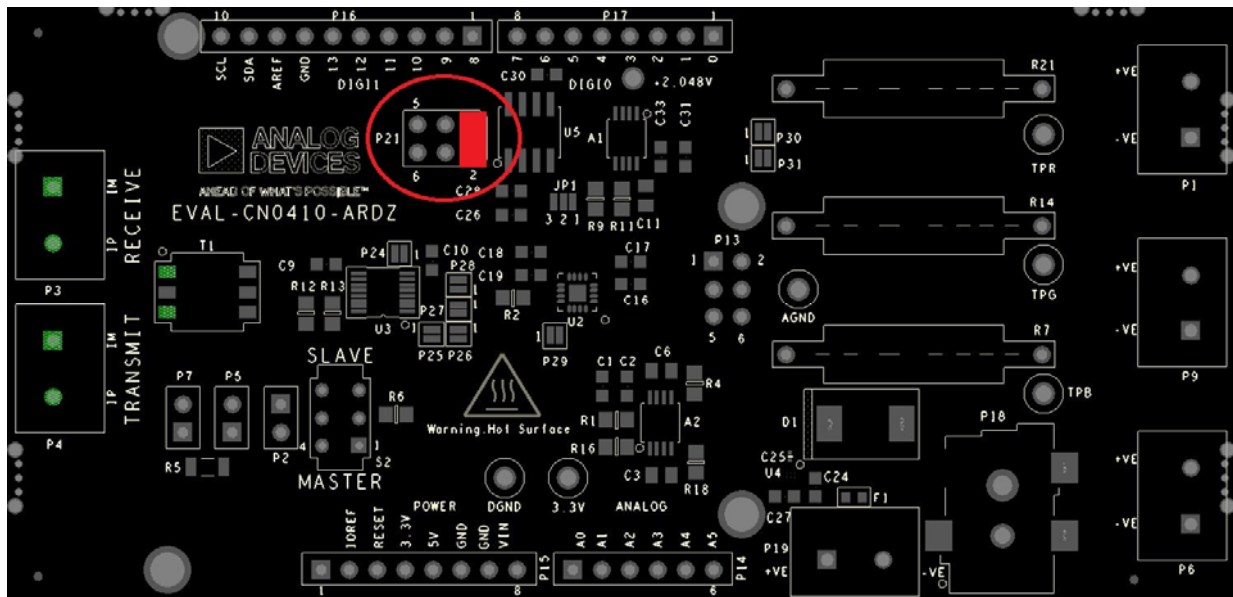

Chip Select (P21) GPIO (P16)


Pins 1 & Pin 2 GPIO 8

Pins 3 & Pin 4 GPIO 9

Pins 5 & Pin 6 GPIO 10

LED Connectors

LED's can be connected through connectors P1, P6 and P9 where each channel can independently source up to 1A of current using the 3 channels of the DAC. Pin 1 **labelled as -ve** of the terminal block is to be connected to the cathode of the LED and pin 2 **labelled as +ve** to be connected to the anode of the LED.

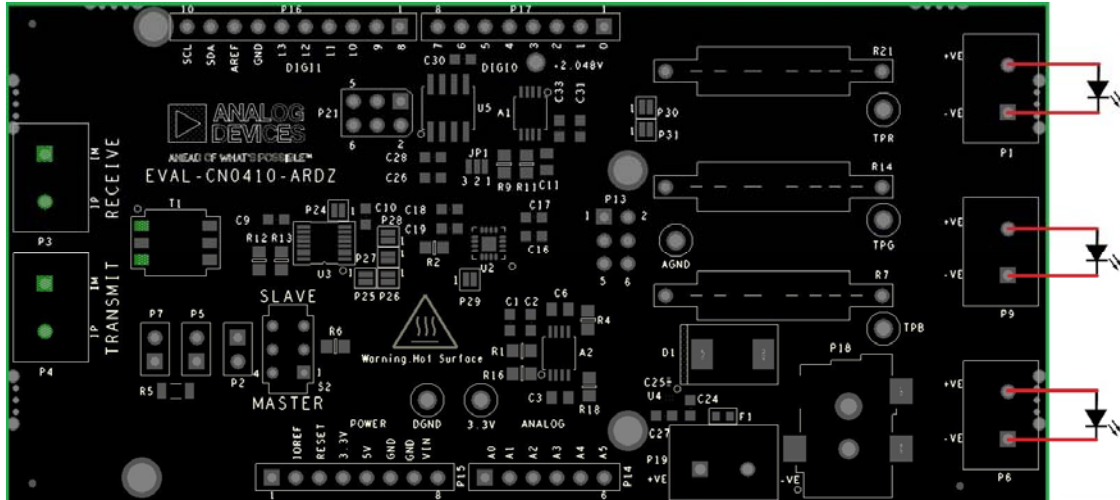

Recommended LED's

- Lumileds Red LED- **LXM5-PD01**
- Lumileds Green LED- **LXML-PM01-0080**
- Lumileds Blue LED- **LXML-PB02**
- Lumileds Datasheet

The circuit have been tested with CFTL-LED-BAR with up to 500mA of current which heats the board up to the rated temperature of the FR4 material used in the fabrication of the board.

It is recommended to use cooling fans when using currents above 500mA per channel.


CFTL-LED-Bar Connectors

EVAL-CN0410-ARDZ	CFTL-LED-BAR
P1.1	P1.1
P1.2	P1.2
P6.1	P9.1
P6.2	P9.2
P9.1	P5.1
P9.2	P5.2

Slave Mode Settings

Refer to the table below to set the board as a slave:

P2	P5	P7	S2
Shorted	Open	Open	Slave Position

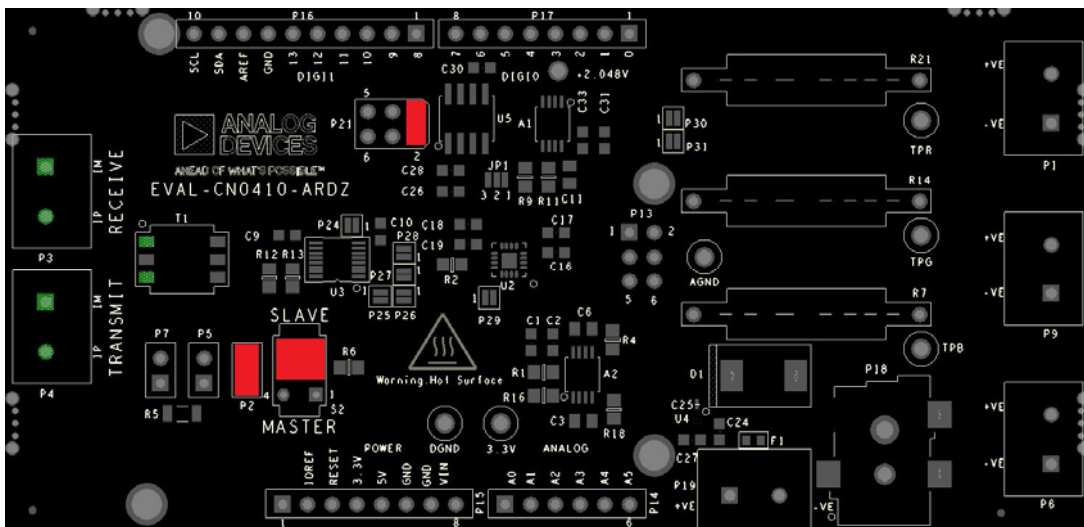

A transformer or a pair of transformers are used to isolate the signals between the two LTC6820's and must be terminated by a resistor. Only the master and the last slave on the transmission line must be terminated by shorting connectors P5 and P7

Schematic, PCB Layout, Bill of Materials EVAL-CN0410-ARDZ Design & Integration Files

- Schematics
- PCB Layout
- Bill of Materials
- Allegro Project

Software

- ADICUP3029 + CN0410

End of Document

<https://wiki.analog.com/resources/eval/user-guides/eval-adicup3029/hardware/cn0410> 9-6-18

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View D248-9STT on WIN SOURCE](#)

 [Klein Tools, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management