



**THE DATASHEET OF**  
**1408453**



5 4 3 2 1





Slotted pan head tapping screws  
DIN 7971-ST 2,9x6,5-F  
screwing torque=35Ncm +/-5Ncm

4,3

69,7

Slotted pan head tapping screws  
DIN 7971-ST 2,2 x 9,5-F  
Maximum screwing torque= 0,25 mN

Min. 5,75  
Max. 9

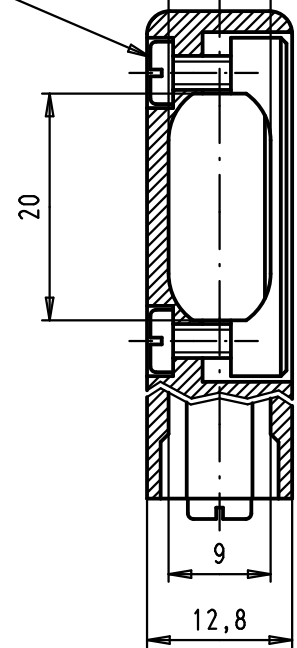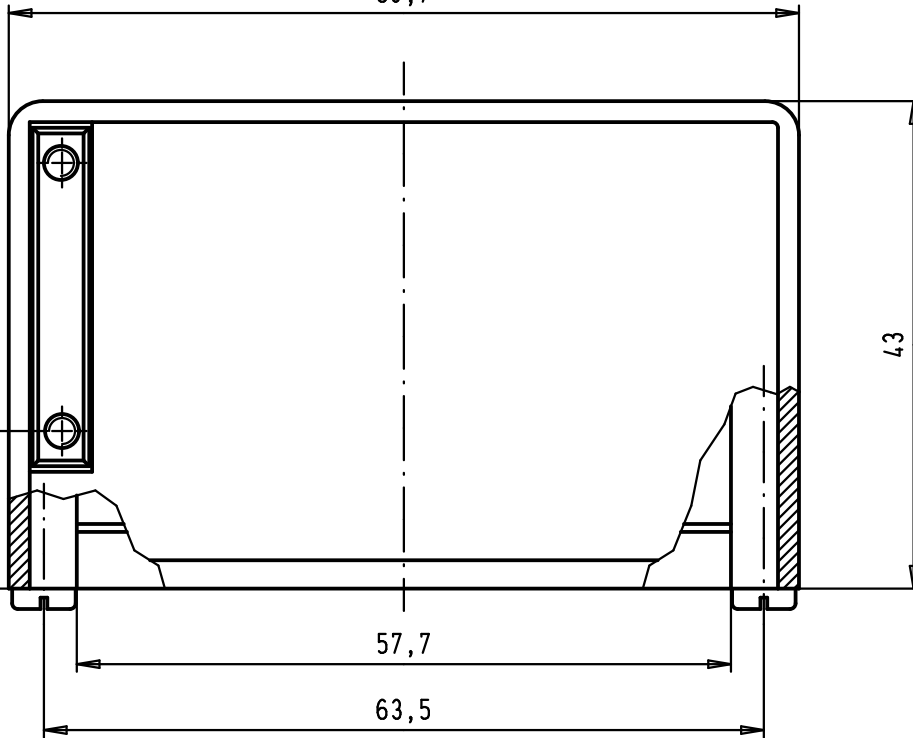

D

C

B

A

					Det.	Name	<p>All Dim. in mm Orig. Size DIN A 4</p>
				Detail.	28/03/02	CV	
				Insp.	25-MAY-11	JMDV	
EC03223	25-MAY-11	SD		Stand.			
34886	26/02/08	PK	HARTING EURL F-95972 Paris				
29760	28/03/02	CV					
Mod.	Det.	Name					

D-Sub, hood 37 poles for spring or slide locking, side cable entry	Maßstab/ Scale 1,5:1
TB 09 67 037 051X	Blatt/ Page 1 / 1
Sub.	

09 67 037 0513	Thermoplastic metallized
09 67 037 0511	Thermoplastic grey RAL 7032
Part number	Material

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1408453 on WIN SOURCE](#)

 [Phoenix Contact Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management