



## SAC-3P-M12Y/2XM12FS B PE S21

Order No.: 1514016

The illustration shows the green standard version

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1514016>Y-distributor, 3-pos. +PE, straight M12 plug on 2 x straight M12  
socket, PIN 2+4 bridged, inner gauge of 21 mm

### Commercial data

GTIN (EAN)	4017918943523
Note	Made-to-order
sales group	D116
Pack	5 pcs.
Customs tariff	85444290
Weight/Piece	0.02972 KG
Catalog page information	Page 110 (PC-2005)

### Product notes

WEEE/RoHS-compliant since:  
01/06/2009

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	3
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ

Ambient temperature (operation)	-25 °C ... 90 °C (Male connector / female connector)
<b>General characteristics</b>	
Standards/regulations	M12 male connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP68/IP69K
Insertion/withdrawal cycles	≥ 100
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Status display	No

#### Certificates / Approvals




Certification

CUL Listed, UL Listed

#### Diagrams/Drawings


Dimensioned drawing

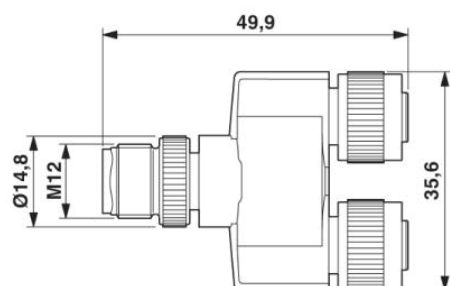


Connector M12 x 1, Y distributor, inner gauge of 21 mm

Schematic diagram

---

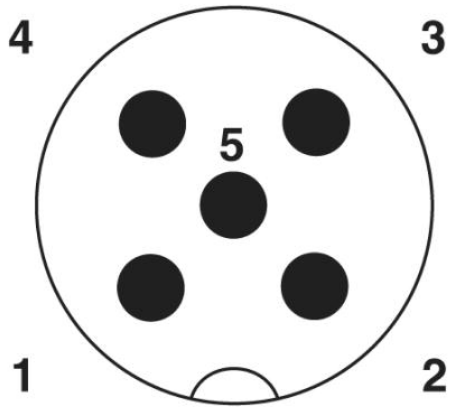

Pin assignment M12 male connector, 5-pos., A-coded, male side

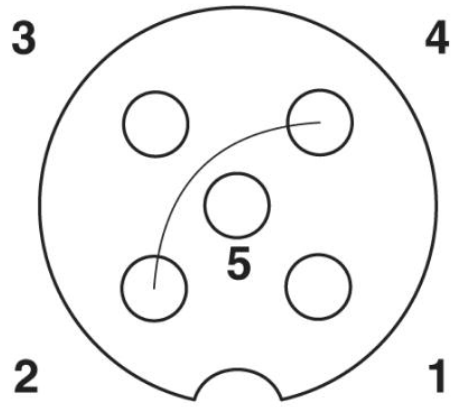

Connector pin assignment M12 socket, 3-pos., bridged, with PE, A-coded, female side view

**Address**


PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1458842 on WIN SOURCE](#)

 [Phoenix Contact Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management