




**THE DATASHEET OF
2410SFV5.00FM/125-2**



CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		please see sheet 1/2		

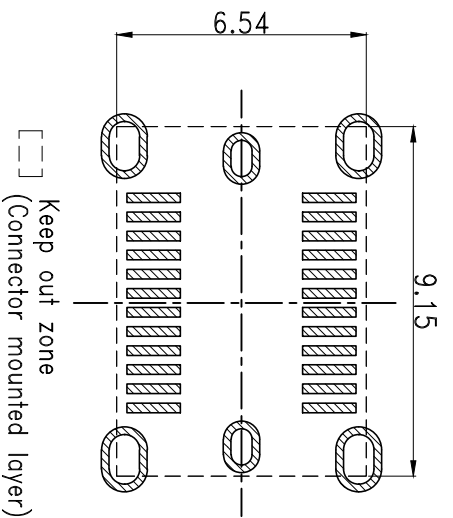


- NOTES:**
1. Material : See Bill Of Material
 2. Waterproof : No Waterproof
 3. Electrical Characteristics:
 Low Level Contact Resistance: 40mΩ Max
 Insulation resistance :100MΩ Min
 Dielectric Withstanding Voltage:100 VAC
 Contact Current Rating ::5A Max
 4. Mechanical Characteristics:
 Insertion Force: 5~20N
 Extraction Force: 8~20N
 After Durability Extraction Force: 6~20N
 5. Durability: 10000 Cycles
 6. Packaging Type: Carrier Reel.
 7. Material Should Be Fulfilled Amphenol SPEC# SSN002
 And Customer Requirements, For HALOGEN FREE Products,
 Also Need To Meet SSN004
 8. Part Number:12401951XX12A

Plating Spec: _____
 E4: Mating Area: Au 30u" Min
 Solder Area: 100u" Min Matte Tin
 50u"Min Nickel Under Plating Over All

A:HF
 Package Spec.
 2:Reel
 Date Code Description
 1:With D/C



(15.53)

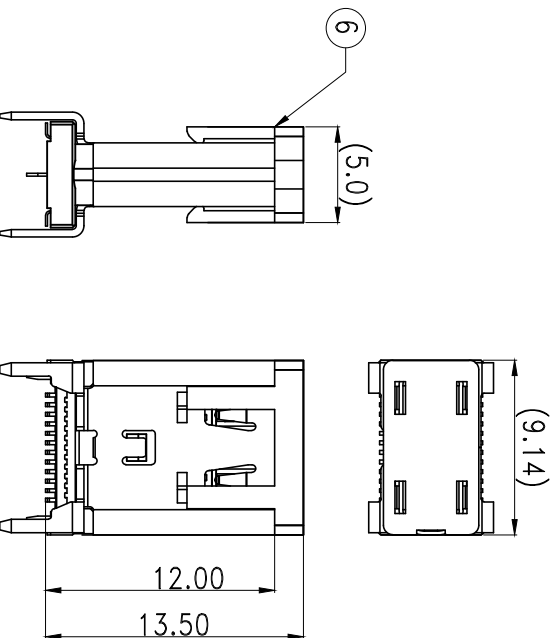

Cap Assembly Condition(REF)

Packing quantity:

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
TOLERANCES		DRAWN	Allen.Lai	07/11/19	
U.S.	METRIC	CHECKED	Michael Qin	07/11/19	
X	+/-				
XX	+/-				
XXX	+/-				
FRACTIONS +/-					
ANGLES +/-					
SEE NOTES					
FOR MATERIALS AND FINISHES					
REMOVE SHARP EDGES					
DIMENSIONS		ANGLE OF PROJECTION			
U.S.	INCHES	DRAWING FILE :			
(METRIC)	(MM)		Michael Qin		
TITLE		SIZE		DRAWING NO.	
Amphenol		A3		C 12401951	
Amphenol East Asia Limited		SCALE		SHEET 2 OF 2	
Customer Drawing For		NONE		REV. 6	
USB 3.1, Type C socket connector, Vertical type, L=12mm, No Water proof					

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2410SFV5.00FM/125-2 on WIN SOURCE](#)

 [Littelfuse Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management