



THE DATASHEET OF AUIRFR2407



RJ45 1000 Base-T Single Port, PoE++, w/ LEDs, Extend Temp



ARJ-139

Features

- Compliant with IEEE802.3 standard
- Designed for Network Interface Cards (NIC), LAN-on-Motherboard (LOM)
- High performance for maximum EMI suppression
- 350μH minimum OCL with 8mA bias current
- RoHS peak wave solder temperature 260°C

Applications

- Support 1000 Base-T applications w/ Bi-Color LEDs
- PoE++(max 1A) with Extended Temperature (-40°C~85°C)
- Applicable for Ethernet Switch, Servers, & Access Point Routers
- Provides signal conditioning, EMI suppression and signal isolation

Electrical Specifications

Parameters	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-40		+85	°C	
Storage Temperature	-40		+85	°C	
Turn Ratio (± 5%)	1CT:1CT				Tx
	1CT:1CT				Rx
Inductance (OCL)	350			μH	100KHz/0.1V@8mA
DC Resistance (DCR)			1.5 / 0.750	Ω	MDI-PHY side / Cable side
Insertion Loss		-1.0		dB	1-100MHz
Return Loss	-20			dB	1-10MHz
	-16				30MHz
	-12				60-80MHz
Cross Talk		-40		dB	1-10MHz
		-35			32-65MHz
		-30			65-100MHz
CMR		-30		dB	1-125MHz
		-20			125-500MHz
PoE Current Capacity		720	1000	mA	@ 57V
Hi-Pot	1500Vrms/0.5mA/2Sec				Pri to Sec


ARJ-139 is RoHS Compliant

RJ45 1000 Base-T Single Port, PoE++, w/ LEDs, Extend Temp



ARJ-139

Marking

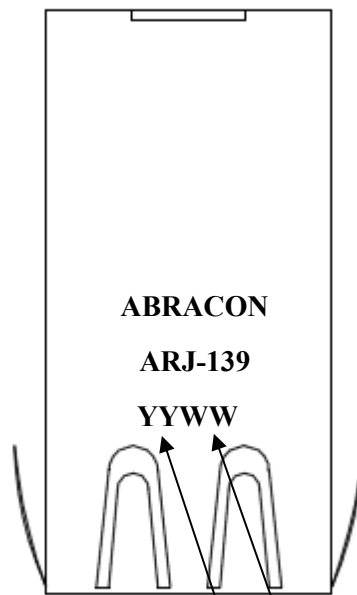

W: Week: E.g. 15 for the 15th week of the year.

Y: Year: E.g. 15 for 2015


Marking Method = Laser Marking

RJ45 1000 Base-T Single Port, PoE++, w/ LEDs, Extend Temp




ARJ-139


Mechanical Specifications

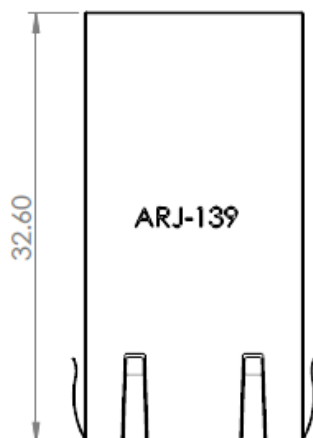


TOP VIEW

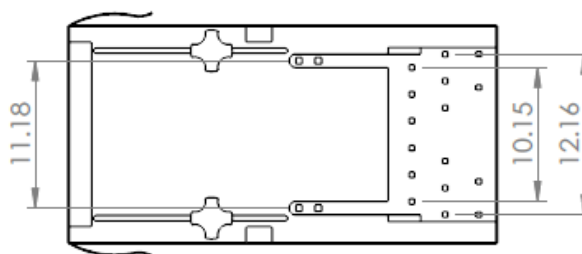

BOTTOM VIEW

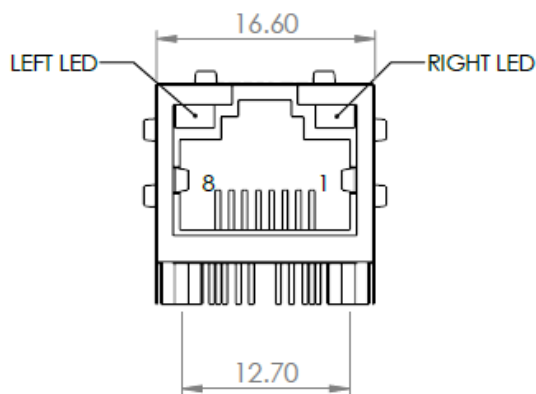

FRONT VIEW

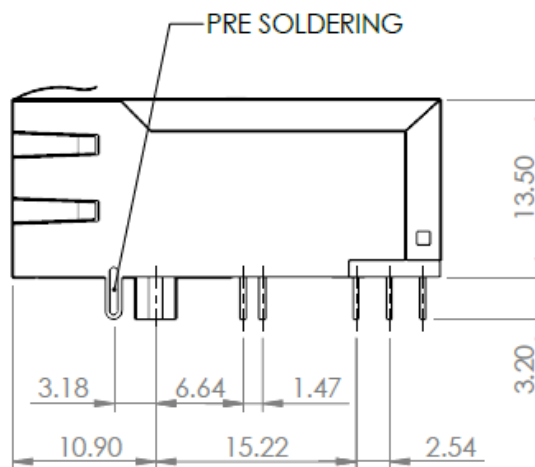

SIDE VIEW

Dimensions: mm


All tolerances are ± 0.25 unless otherwise specified.

RJ45 1000 Base-T Single Port, PoE++, w/ LEDs, Extend Temp



ARJ-139

RECOMMENDED LAND PATTERN

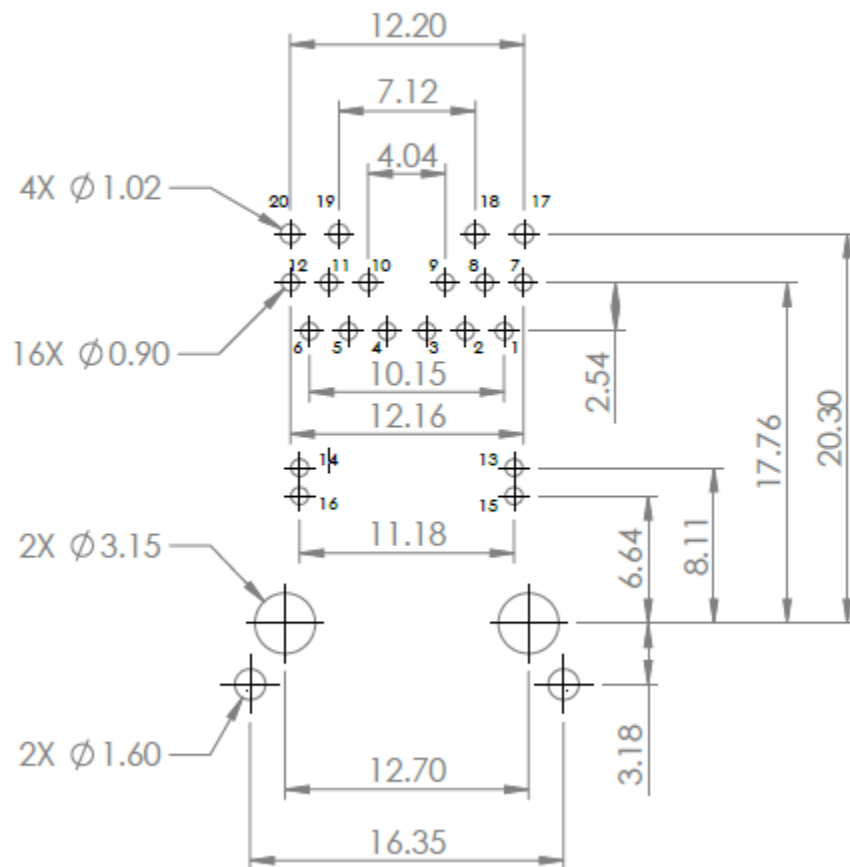

Dimensions: mm


All tolerances are ± 0.25 unless otherwise specified.

RJ45 1000 Base-T Single Port, PoE++, w/ LEDs, Extend Temp



ARJ-139

Schematics

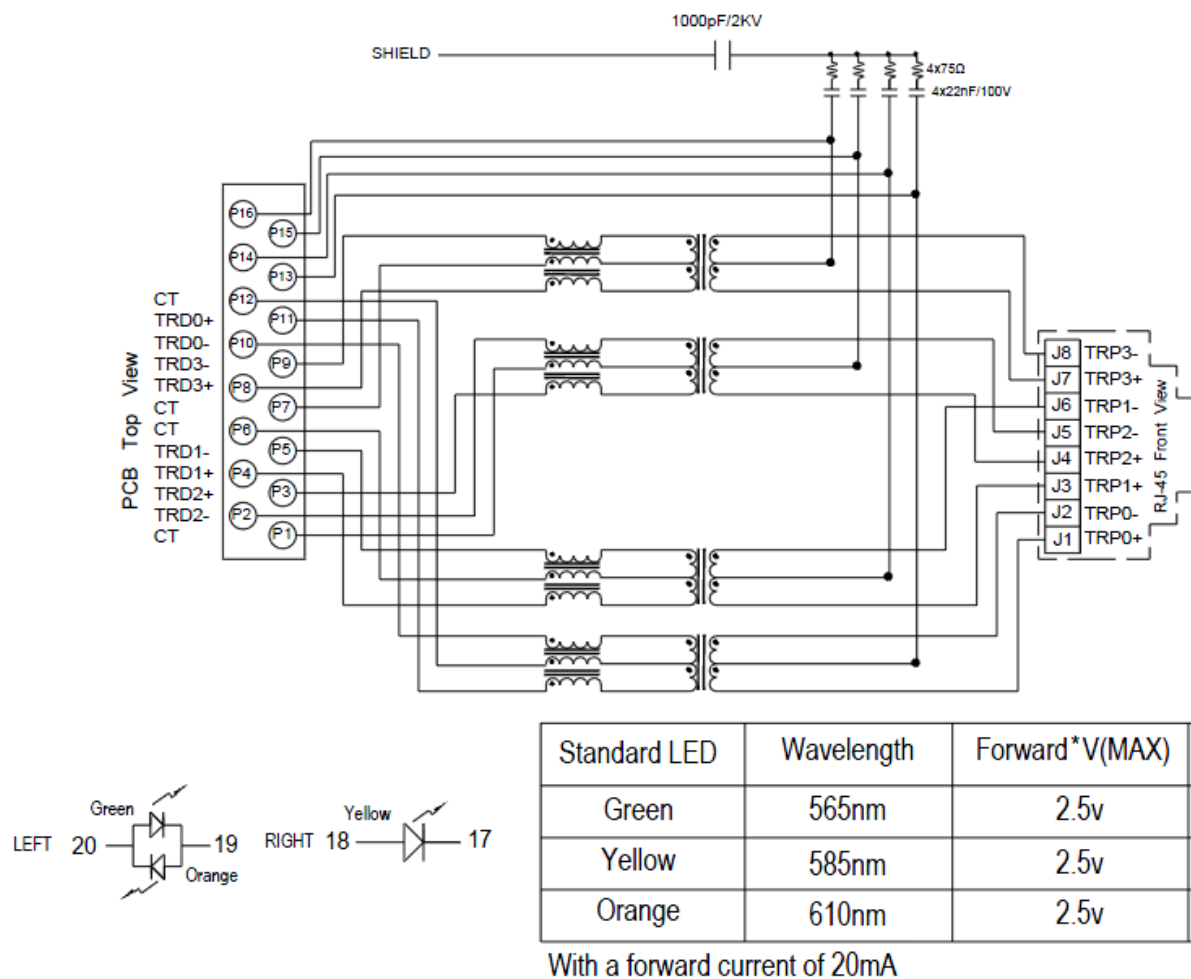


RJ45 1000 Base-T Single Port, PoE++, w/ LEDs, Extend Temp



ARJ-139

Reflow Profile

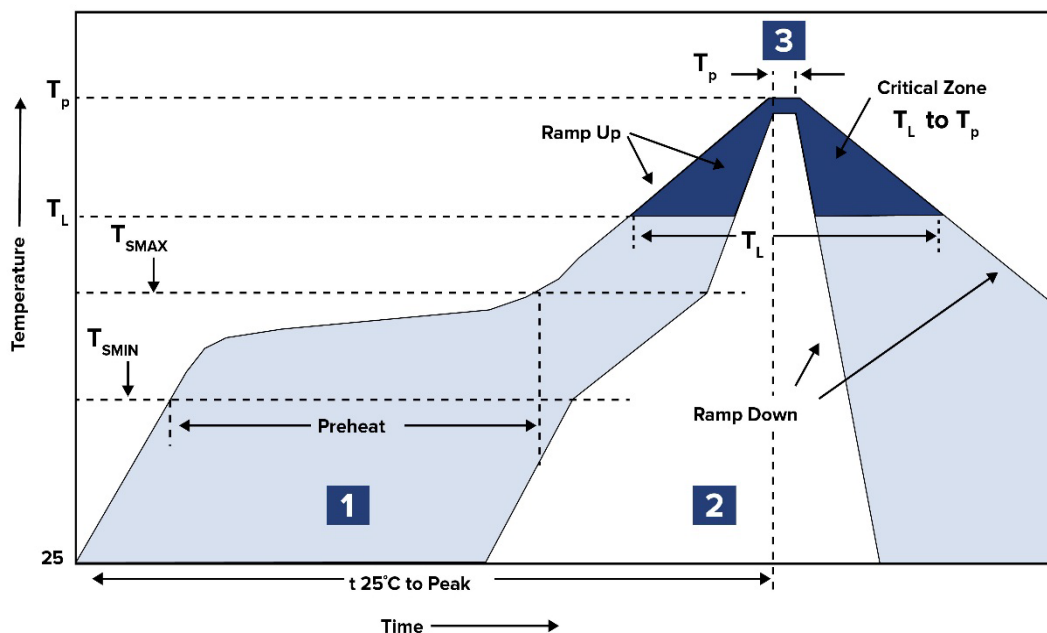

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 120°C ~ 180°C	60 ~ 120 sec.
2	Reflow	T_L 180°C	120 sec. Max
3	Peak heat	T_p 250°C±10°C	5 sec. Max

RJ45 1000 Base-T Single Port, PoE++, w/ LEDs, Extend Temp




ARJ-139

Packaging

Packing: 60pcs/tray

Weight: 9.40 grams / pcs

Packaging material: PET

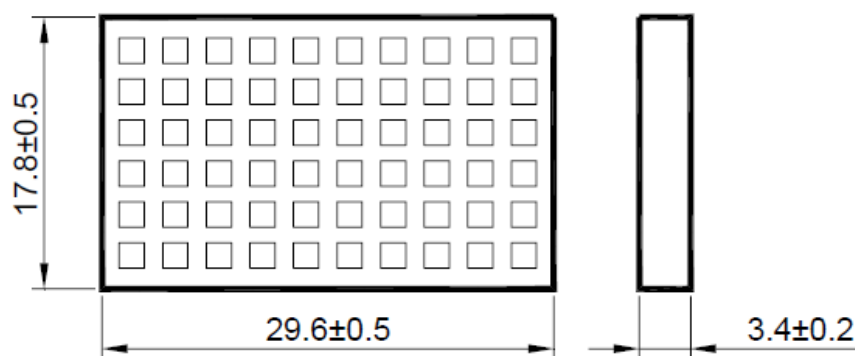

Outer carton unit (optional): 840 pcs/ 14 Trays/box

Dimensions: mm

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln, Spicewood TX 78669
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION G : 8/5/2025

ABRACON IS
ISO9001-2015
CERTIFIED

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 View [AUIRFR2407](#) on WIN SOURCE

 [Infineon Technologies](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management