




THE DATASHEET OF
39-01-3028



| REV. | DESCRIPTION/ECO NO. | DATE |
|------|---------------------------|----------|
| | RELEASED | 3/2/01 |
| A | ADD NOTES | 6/15/01 |
| B | 1816 CHANGE C-2V TO C-2F | 11/16/07 |
| C | 1816 VENDOR CHNG FILAMENT | 7/5/11 |

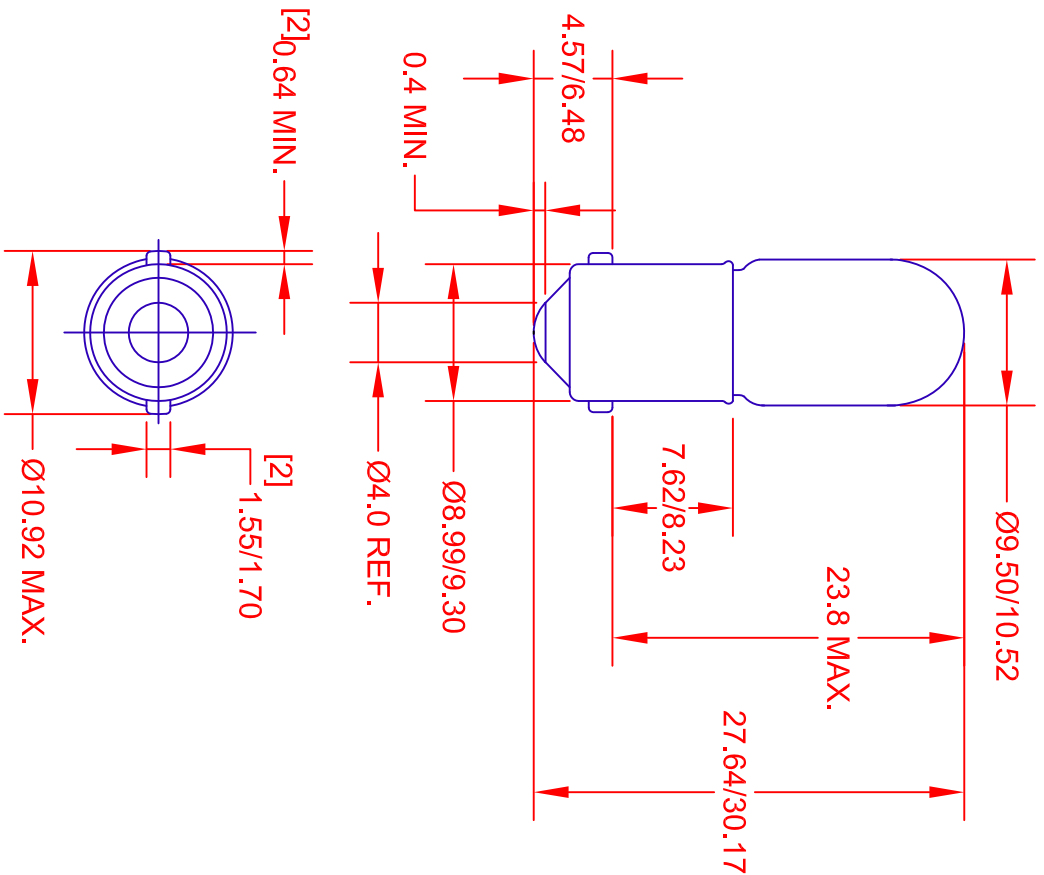

| JKL LAMP NUMBER | VOLTS RATED | AMPS ±10% | MSCP ±25% | LUMENS ±25% | AVERAGE LIFE HRS. | FILAMENT TYPE |
|-----------------|-------------|-----------|-----------|-------------|-------------------|---------------|
| 49 | 2.0 | .060 | .04 | 0.50 | 1,000 | S-2 |
| 1436 | 2.5 | .300 | .30 | 3.77 | 1,000 | C-2R |
| 43 | 2.5 | .500 | .50 | 6.29 | 3,000 | C-2R |
| 1490 | 3.2 | .160 | .20 | 2.51 | 3,000 | C-2R |
| 45 | 3.2 | .350 | .50 | 6.29 | 3,000 | C-2R |
| 1850 | 5.0 | .090 | .25 | 3.14 | 1,500 | C-2R |
| 316 | 6.0 | .700 | 3.40 | 42.74 | 500 | C-2R |
| 755 | 6.3 | .150 | .33 | 4.15 | 20,000 | C-2V |
| 47 | 6.3 | .150 | .52 | 6.54 | 3,000 | C-2R |
| 1866 | 6.3 | .250 | .65 | 8.17 | 10,000 | C-2R |
| 44 | 6.3 | .250 | .90 | 11.31 | 3,000 | C-2R |
| 1888 | 7.0 | .500 | 2.00 | 25.14 | 3,000 | C-2R |
| 1816 | 13.0 | .330 | 3.00 | 37.71 | 1,000 | C-2V |
| 756 | 14.0 | .080 | .31 | 3.90 | 15,000 | C-2F |
| 1815 | 14.0 | .200 | 1.40 | 17.60 | 3,000 | C-2V |
| 1891 | 14.0 | .240 | 2.00 | 25.14 | 500 | C-2F |
| *256 | 14.0 | .270 | 1.60 | 20.11 | 500 | C-2R |
| 1893 | 14.0 | .330 | 2.00 | 25.14 | 7,500 | C-2F |
| 1813 | 14.4 | .100 | .86 | 10.81 | 1,000 | C-2V |
| 1892 | 14.4 | .120 | .75 | 9.43 | 1,000 | C-2F |
| 1818 | 24.0 | .170 | 3.30 | 41.48 | 250 | C-2F |
| 1819 | 28.0 | .040 | .34 | 4.27 | 2,500 | C-2F |
| 1829 | 28.0 | .070 | 1.00 | 12.57 | 1,000 | C-2F |
| 757 | 28.0 | .080 | .62 | 7.79 | 15,000 | C-2F |
| 1820 | 28.0 | .100 | 1.60 | 20.11 | 1,000 | C-2F |
| 1864 | 28.0 | .170 | 3.00 | 37.71 | 1,500 | C-2F |
| 313 | 28.0 | .170 | 3.50 | 44.00 | 500 | C-2F |
| 1873 | 28.0 | .200 | 3.00 | 37.71 | 7,000 | C-2F |
| 1822 | 36.0 | .100 | 2.10 | 26.40 | 1,000 | C-2F |
| 1828 | 37.5 | .050 | .65 | 8.17 | 3,000 | C-2F |
| 1835 | 55.0 | .050 | 1.10 | 13.83 | 5,000 | C-2F |
| RB22 | 130.0 | .027 | .600 | 7.54 | 5,000 | C-5 |

*FLASHER TYPE LAMP

NOTES:
 1. FLASHER TYPE LAMPS HAVE A BI-METAL STRIP ADDED TO THE FILAMENT MOUNT TO PROVIDE THE FLASHING. HEAT FROM THE FILAMENT CAUSES THIS STRIP TO BEND AWAY FROM THE LEAD WIRE, BREAKING THE CIRCUIT. AS THE BI-METAL STRIP COOLS IT RETURNS TO ITS ORIGINAL POSITION AGAINST THE LEAD WIRE AND THE LAMP LIGHTS.

2. FLASHER TYPE LAMPS ARE DESIGNED TO RANDOMLY LINK AT THE APPROXIMATE RATE OF 50-150 FLASHERS PER MINUTE AT A NORMAL ROOM TEMPERATURE. SOME WILL BE OUTSIDE THIS RANGE. AS AMBIENT TEMPERATURE AND/OR INPUT VOLTAGE CHANGES, THE FLASH RATE MAY VARY CONSIDERABLY.

| | | | | | |
|---|--|-----------------|-----------------------------------|---|-----------------------------------|
| | METRIC DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- .02 2 PL +/- .020 ANGLE +/- 0 | | JKL COMPONENTS CORPORATION | | |
| | DRAWN BY L. WENGSTROM | APVD BY L.R. | DATE 7/5/11 | TITLE T-3 1/4 MINIATURE SINGLE CONTACT BAYONET | DRAWING NO. 55335 |
| - CAD DRAWING - MANUAL REVISIONS NOT PERMITTED | SCALE A | NONE | RELEASED DATE 3/2/01 | REVISION DATE 7/5/11 | REV. NO. C SHEET 1 OF 1 |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 39-01-3028 on WIN SOURCE](#)

 [Molex, LLC Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management