



**THE DATASHEET OF
KXR94-2050-FR**





KXR94 Series

Accelerometers and Inclinometers

FEATURES

- Small Package - 5x5x1.2mm DFN
- Multiplexed Analog or Digital SPI Interface
- Internal 1KHz Low Pass Filter
- Low Noise
- Lead-free Solderability
- Excellent Temperature Performance
- High Shock Survivability
- Low Power Consumption
- User Definable Bandwidth
- Factory Programmable Offset and Sensitivity
- Self-test Function

PROPRIETARY TECHNOLOGY

These high-performance silicon micromachined linear accelerometers and inclinometers consist of a sensor element and an ASIC packaged in a 5x5x1.2mm Dual Flat No-lead (DFN). The sensor element is fabricated from single-crystal silicon with proprietary Deep Reactive Ion Etching (DRIE) processes, and is protected from the environment by a hermetically-sealed silicon cap at the wafer level.

The **KXR94** series is designed to provide a high signal-to-noise ratio with integrated temperature compensation that provides excellent performance over temperature. These sensors can accept supply voltages between 2.5V and 5.25V. Sensitivity is factory programmable allowing customization for applications requiring from $\pm 1.0g$ to $\pm 4.0g$ ranges. Sensor bandwidth is user-definable.

The sensor element functions on the principle of differential capacitance. Acceleration causes displacement of a silicon structure resulting in a change in capacitance. An ASIC, using a standard CMOS manufacturing process, detects and transforms changes in capacitance into an analog output voltage, which is proportional to acceleration. The sense element design utilizes common mode cancellation to decrease errors from process variation and environmental stress. Available in analog and multiplexed analog outputs and serial peripheral interface (SPI).

MARKETS

APPLICATIONS

Automotive

- Stability Control
- Telematics/GPS
- Theft and Accident Alarms

Personal Navigation Devices

- Inertial Navigation and Dead Reckoning

Cell Phones and Handheld PDAs


- Gesture Recognition

Cameras and Video Equipment

- Image Stabilization

Industrial

- Platform Stabilization
- Drill Orientation

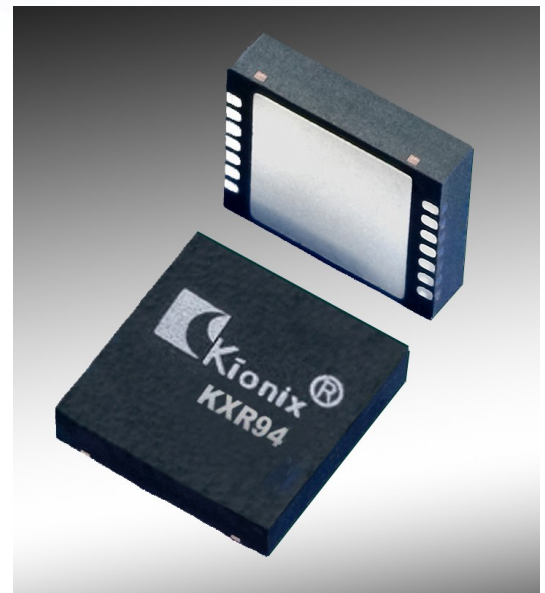

36 Thornwood Dr. - Ithaca, NY 14850 USA tel: 607-257-1080 - fax: 607-257-1146 - www.kionix.com - info@kionix.com

KXR94 Series

Accelerometers and Inclinometers

PERFORMANCE SPECIFICATIONS

The performance parameters below are programmed and tested at 3.3 volts. However, the device can be factory programmed to accept supply voltages from 2.5 V to 5.25 V. Performance parameters will change with supply voltage variations.

PERFORMANCE SPECIFICATIONS				
PARAMETERS	UNITS	KXR94-2050	KXR94-2353	CONDITION
Range ¹	g	±2.0		Factory programmable
Sensitivity	mV/g	660 typical (673 max)	Not applicable	12-bit operation
	counts/g	Not applicable	819 target (835 max)	
0g Offset vs. Temp.	mg/°C	±0.2 typical		
Sensitivity vs. Temp	%/°C	±0.01 (xy) ±0.02 (z) typical		
Noise Density	$\mu\text{g} / \sqrt{\text{Hz}}$	45 typical		
Bandwidth ²	Hz	800		-3dB
Non-Linearity	% of FS	0.1 typical		% of full scale output
Ratiometric Error	%	±1.25 (xy) ±0.2 (z) typical		3.3V ± 5%
Cross-axis Sensitivity	%	2.0 typical		
A/D Conversion Time	μS	Not applicable	40 typical	
SPI Communication Rate ³	MHz	Not Applicable	5 typical	
Power Supply	V	3.3		Standard
Current Consumption	mA	1.03 typical	0.95 typical	Operating
	μA	5 max		Standby
ENVIRONMENTAL SPECIFICATIONS				
PARAMETERS	UNITS	KXR94-2050	KXR94-2353	CONDITION
Operating Temperature	°C	-40 to 85 (Consumer/Industrial)		Powered
		-40 to 125 (Automotive)		
Storage Temperature	°C	-55 to 150		Un-powered
Mechanical Shock	g	5000		Powered or un-powered, 0.5 msec halversine
ESD	V	3000		Human body model

NOTES

¹ Custom ranges from 1.0g to 4.0g available.

² Internal low pass filter. Lower frequencies are user definable with external capacitors.

³ SPI communication rate can be optimized for faster communication.

ORDERING GUIDE

Product	Axis(es) of Sensitivity	Range (g)	Sensitivity	Offset	Operating Voltage (V)	Ouput	Temperature (°C)	Package
KXR94-1050	XYZ	2	560 (mV/g)	1.4 V	2.8	Mux Analog	-40 to +85	5x5x1.2 DFN
KXR94-2050	XYZ	2	660 (mV/g)	1.65V	3.3	Mux Analog	-40 to +85	5x5x1.2 DFN
KXR94-2283	XYZ	2	1000 (mV/g)	2.5V	5.0	Mux Analog	-40 to +85	5x5x1.2 DFN
KXR94-2353	XYZ	2	819 (counts/g)	2048 counts	3.3	Digital SPI	-40 to +85	5x5x1.2 DFN
KXR94-7050	XYZ	2	660 (mV/g)	1.65V	3.3	Mux Analog	-40 to 125	5x5x1.2 DFN

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View KXR94-2050-FR on WIN SOURCE](#)

 [Kionix Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management