




**THE DATASHEET OF
LCMB150-16-X**



| ALL DIMENSIONS ARE IN mm | | | | | | | | | | | | | | | | | |
|--------------------------|--------------------|-------------------------|-----------|-------------------|--|---|---|---------|--------|--------|---------|---------|---------|--------|---------|------------|--|
| Part Number | Class 2r Wire Size | Class 5f & 6f Wire Size | Stud Size | Wire Strip Length | Panduit Die Index No. For Class 2r Wire Circumferential Dies | Panduit Die Index No. For Class 5f & 6f Wire Circumferential Dies | Panduit Die Index No. For Class 5f & 6f Wire Nest/Indentor Dies | i ±2.76 | o ±.50 | i ±.50 | a ±2.25 | m (ref) | n ±2.25 | d ±.50 | b ±2.25 | t | |
| LCMB35-6-Q | 35mm ² | 25mm ² | M6 | 34.4 | P29 | P29 | ---- | 57.3 | 10.40 | 8.20 | 32.8 | 12.3 | 8.5 | 6.60 | 15.5 | 2.05 ± .40 | |
| LCMB35-8-Q | 35mm ² | 25mm ² | M8 | 34.4 | P29 | P29 | ---- | 57.3 | 10.40 | 8.20 | 32.8 | 12.3 | 8.5 | 9.00 | 15.5 | 2.05 ± .40 | |
| LCMB35-10-Q | 35mm ² | 25mm ² | M10 | 34.4 | P29 | P29 | ---- | 57.3 | 10.40 | 8.20 | 32.8 | 12.3 | 8.5 | 11.00 | 15.5 | 2.05 ± .40 | |
| LCMB35-12-Q | 35mm ² | 25mm ² | M12 | 34.4 | P29 | P29 | ---- | 63.3 | 10.40 | 8.20 | 32.8 | 14.5 | 11.5 | 14.00 | 21.5 | 1.50 ± .40 | |
| LCMB50-6-E | 50mm ² | 35mm ² | M6 | 38.2 | P37 | P33 | ---- | 62.8 | 12.30 | 9.80 | 36.6 | 11.5 | 10.0 | 6.60 | 18.0 | 2.50 ± .40 | |
| LCMB50-8-E | 50mm ² | 35mm ² | M8 | 38.2 | P37 | P33 | ---- | 62.8 | 12.30 | 9.80 | 36.6 | 11.5 | 10.0 | 9.00 | 18.0 | 2.50 ± .40 | |
| LCMB50-10-E | 50mm ² | 35mm ² | M10 | 38.2 | P37 | P33 | ---- | 62.8 | 12.30 | 9.80 | 36.6 | 11.5 | 10.0 | 11.00 | 18.0 | 2.50 ± .40 | |
| LCMB50-12-E | 50mm ² | 35mm ² | M12 | 38.2 | P37 | P33 | ---- | 66.3 | 12.30 | 9.80 | 36.6 | 14.0 | 11.0 | 14.00 | 23.0 | 1.80 ± .40 | |
| LCMB70-8-X | 70mm ² | 50mm ² | M8 | 39.6 | P45 | P37 | ---- | 68.2 | 14.20 | 11.50 | 38.0 | 14.5 | 11.5 | 9.00 | 20.8 | 2.85 ± .40 | |
| LCMB70-10-X | 70mm ² | 50mm ² | M10 | 39.6 | P45 | P37 | ---- | 68.2 | 14.20 | 11.50 | 38.0 | 14.5 | 11.5 | 11.00 | 20.8 | 2.85 ± .40 | |
| LCMB70-12-X | 70mm ² | 50mm ² | M12 | 39.6 | P45 | P37 | ---- | 68.2 | 14.20 | 11.50 | 38.0 | 14.5 | 11.5 | 14.00 | 20.8 | 2.80 ± .40 | |
| *LCMB95-6-X | 95mm ² | 70mm ² | M6 | 44.6 | P54 | P45 | P62/4 | 79.0 | 16.50 | 13.50 | 43.0 | 15.0 | 13.5 | 6.60 | 24.5 | 3.05 ± .40 | |
| LCMB95-8-X | 95mm ² | 70mm ² | M8 | 44.6 | P54 | P45 | P62/4 | 79.0 | 16.50 | 13.50 | 43.0 | 15.0 | 13.5 | 9.00 | 24.5 | 3.05 ± .40 | |
| LCMB95-10-X | 95mm ² | 70mm ² | M10 | 44.6 | P54 | P45 | P62/4 | 79.0 | 16.50 | 13.50 | 43.0 | 15.0 | 13.5 | 11.00 | 24.5 | 3.05 ± .40 | |
| LCMB95-12-X | 95mm ² | 70mm ² | M12 | 44.6 | P54 | P45 | P62/4 | 79.0 | 16.50 | 13.50 | 43.0 | 15.0 | 13.5 | 14.00 | 24.5 | 3.00 ± .40 | |
| LCMB95-16-X | 95mm ² | 70mm ² | M16 | 44.6 | P54 | P45 | P62/4 | 79.0 | 16.50 | 13.50 | 43.0 | 15.0 | 13.5 | 18.00 | 24.5 | 2.90 ± .40 | |
| LCMB120-8-X | 120mm ² | 95mm ² | M8 | 41.3 | P62 | P50 | P76/4 | 80.2 | 18.60 | 15.20 | 39.7 | 15.5 | 14.5 | 9.00 | 27.5 | 3.50 ± .45 | |
| LCMB120-10-X | 120mm ² | 95mm ² | M10 | 41.3 | P62 | P50 | P76/4 | 80.2 | 18.60 | 15.20 | 39.7 | 15.5 | 14.5 | 11.00 | 27.5 | 3.50 ± .45 | |
| LCMB120-12-X | 120mm ² | 95mm ² | M12 | 41.3 | P62 | P50 | P76/4 | 80.2 | 18.60 | 15.20 | 39.7 | 15.5 | 14.5 | 14.00 | 27.5 | 3.50 ± .45 | |
| LCMB120-16-X | 120mm ² | 95mm ² | M16 | 41.3 | P62 | P50 | P76/4 | 80.2 | 18.60 | 15.20 | 39.7 | 15.5 | 14.5 | 18.00 | 27.5 | 3.40 ± .45 | |
| LCMB150-8-X | 150mm ² | 120mm ² | M8 | 58.6 | P66 | ---- | P76/4 | 100.0 | 21.00 | 16.50 | 57.0 | 18.0 | 16.5 | 9.00 | 30.5 | 4.45 ± .45 | |
| LCMB150-10-X | 150mm ² | 120mm ² | M10 | 58.6 | P66 | ---- | P76/4 | 100.0 | 21.00 | 16.50 | 57.0 | 18.0 | 16.5 | 11.00 | 30.5 | 4.45 ± .45 | |
| LCMB150-12-X | 150mm ² | 120mm ² | M12 | 58.6 | P66 | ---- | P76/4 | 100.0 | 21.00 | 16.50 | 57.0 | 18.0 | 16.5 | 14.00 | 30.5 | 4.45 ± .45 | |
| LCMB150-16-X | 150mm ² | 120mm ² | M16 | 58.6 | P66 | ---- | P76/4 | 100.0 | 21.00 | 16.50 | 57.0 | 18.0 | 16.5 | 18.00 | 30.5 | 4.30 ± .45 | |
| LCMB150-20-X | 150mm ² | 120mm ² | M20 | 58.6 | P66 | ---- | P76/4 | 103.5 | 21.00 | 16.50 | 57.0 | 22.0 | 16.5 | 22.00 | 30.5 | 4.30 ± .45 | |

* CULUS LISTED WIRE CONNECTOR

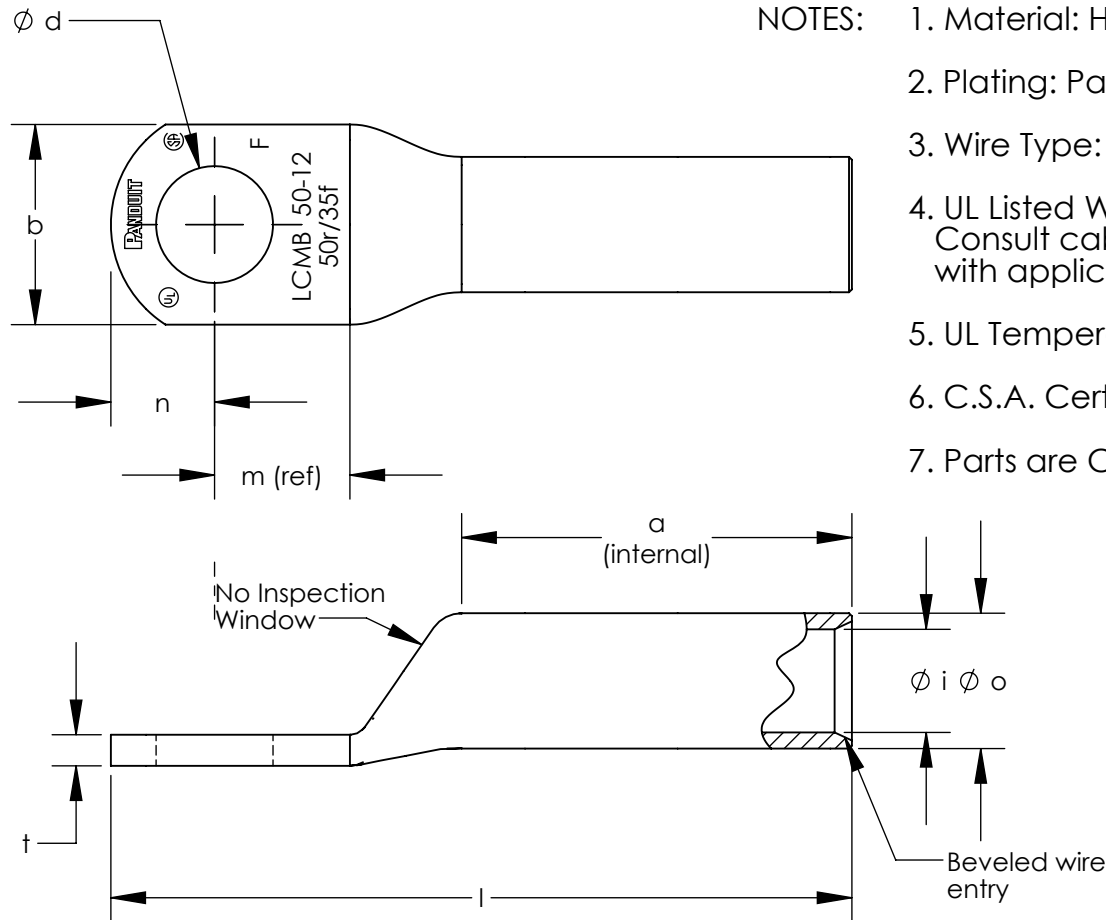

- NOTES:
1. Material: High conductivity seamless copper tube.
 2. Plating: Parts are annealed and tin plated.
 3. Wire Type: Class 2r, 5f & 6f Stranded Copper per DIN VDE 0295, IEC 60228 and HD 383.
 4. UL Listed Wire Connector: Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
 5. UL Temperature Rating: 90° C
 6. C.S.A. Certified Wire Connector: Yes
 7. Parts are CE and tested per EN 61238-1:2003/IEC 61238-1:2003 Class B, with Class 2r wire 35mm² - 150mm².



| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|------|------|------|-----|------------------|-------------|
| 01 | 7/15 | JHNU | TLCO | RGB | ADDED LCMB95-6-X | 12J036BI-JC |
| 00 | 7/13 | JHNU | TLCO | RGB | DRAWING RELEASED | 12J036BI-JC |

| | | | |
|--|--|-------------------------------|--|
| TITLE METRIC LUGS - LCMB ONE HOLE SERIES 35-150mm LONG BARREL CUSTOMER DRAWING | | | |
| ITEM REVISION NAME 12J036BI/01 | | PANDUIT | |
| DATASET FILE NAME 12J036BI-JC/01.SLDDRW | | | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] | | | |
| .X ± .XXX ± .XX ± ANGLES ± | | MATERIAL SEE NOTES | |
| DRAWN BY JHNU | | DRAWING NUMBER 12J036BI-JC | |
| DATE 7/13 | | SHEET 1 OF 1 | |
| CHK TLCO | | SCALE NONE | |
| APR | | SIZE B | |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LCMB150-16-X on WIN SOURCE](#)

 [Panduit Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management