




**THE DATASHEET OF  
LDD182G4503A-196**



# Chip Multilayer Hybrid Dividers

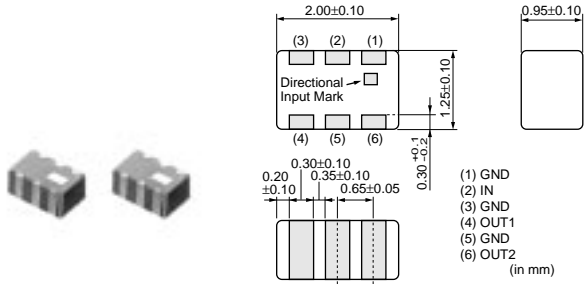

LDD21 Series

100ohm external resistor is required between Out 1 and Out 2.

All the technical data and information contained herein are subject to change without prior notice.

Part Number	Frequency Range (MHz)	Insertion Loss (OUT1,OUT2) (dB)	Isolation (min.) (dB)	VSWR (max.)	Application
<b>LDD182G4503A-196</b>	2450.0 ±50.0MHz	3.4 ±0.6dB	15.0	1.5	WLAN/BT
<b>LDD211G7503A-067</b>	1750.0 ±30.0MHz	3.4 ±0.4dB	20.0	1.5	CDMA
<b>LDD212G1403A-075</b>	2140.0 ±30.0MHz	3.4 ±0.4dB	22.0	1.5	UMTS(Band1)
<b>LDD21967M03A-068</b>	967.0 ±13.0MHz	3.4 ±0.4dB	20.0	1.4	CDMA

Characteristics Impedance (Nominal): 50ohm    Operating Temperature Range: -40°C to +85°C

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View LDD182G4503A-196 on WIN SOURCE](#)
- [Murata Electronics North America Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management