



# THE DATASHEET OF LFCN-2250+





CERAMIC

# Low Pass Filter

## LFCN-2250+

50Ω DC<sup>1</sup> to 2200 MHz

### FEATURES

- Excellent power handling, 10W
- Small size
- 7 sections
- Temperature stable
- LTCC construction
- Protected by U.S Patent 6,943,646



Generic photo used for illustration purposes only

CASE STYLE: FV1206

### APPLICATIONS

- Harmonic rejection
- VHF/UHF transmitters/receivers
- Lab use

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### ELECTRICAL SPECIFICATIONS<sup>1,2</sup> AT 25°C

| Parameter | F#             | Frequency (MHz) | Min.      | Typ. | Max. | Units |    |
|-----------|----------------|-----------------|-----------|------|------|-------|----|
| Passband  | Insertion Loss | DC-F1           | DC-2200   | —    | —    | 1.2   | dB |
|           | Freq. Cut-Off  | F2*             | 2575      | —    | 3.0  | —     | dB |
|           | VSWR           | DC-F1           | DC-2200   | —    | 1.2  | —     | :1 |
| Stop Band | Rejection Loss | F3              | 2900      | 20   | —    | —     | dB |
|           |                | F4-F5           | 3000-5000 | —    | 30   | —     |    |
|           | VSWR           | F6              | 7200      | —    | 20   | —     | :1 |
|           |                | F3-F6           | 2900-7200 | —    | 20   | —     |    |

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required. Alternatively, if DC pass IN-OUT is required, Mini-Circuits' "D" suffix version of this model will support DC IN-OUT, and provide >100 MOhm isolation to ground.

2. Measured on Mini-Circuits Characterization Test Board TB-270.


\* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

### MAXIMUM RATINGS


| Parameter                   | Ratings           |
|-----------------------------|-------------------|
| Operating temperature       | -55°C to 100°C    |
| Storage temperature         | -55°C to 100°C    |
| RF Power Input <sup>3</sup> | 10 W max. at 25°C |

3. Passband rating, derate linearly to 3.5W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

### TYPICAL FREQUENCY RESPONSE

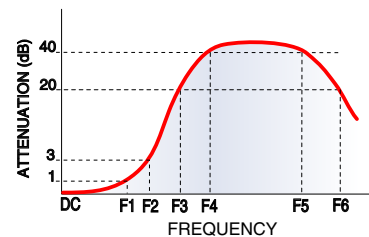

### FUNCTIONAL SCHEMATIC

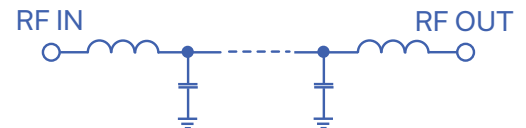

REV. Q  
ECO-011068  
LFCN-2250+  
AD/CP/AM  
120121






### PIN CONNECTIONS

|        |     |
|--------|-----|
| RF IN  | 1   |
| RF OUT | 3   |
| GROUND | 2,4 |

PRODUCT MARKING: N/A


DEMO BOARD MCL P/N: TB-270  
SUGGESTED PCB LAYOUT (PL-137)

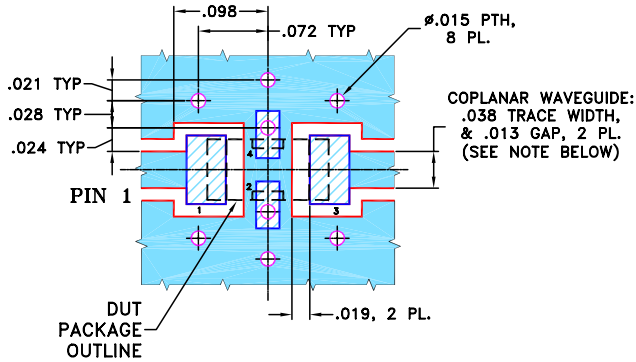


- NOTES:**
1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### OUTLINE DRAWING

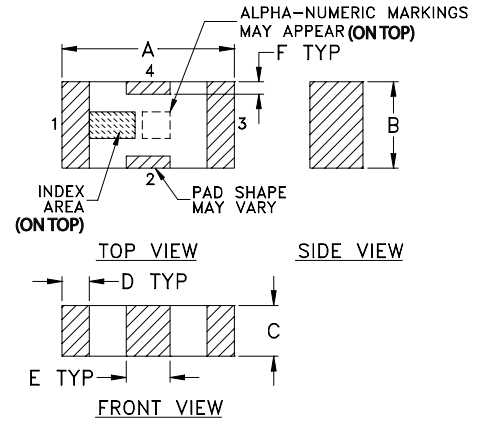

### PCB Land Pattern

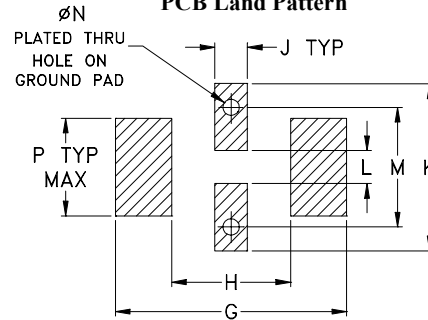

Suggested Layout,  
Tolerance to be within ±.002

### OUTLINE DIMENSIONS (Inches mm)

| A    | B    | C    | D    | E    | F    | G    |
|------|------|------|------|------|------|------|
| .126 | .063 | .037 | .020 | .032 | .009 | .169 |
| 3.20 | 1.60 | 0.94 | 0.51 | 0.81 | 0.23 | 4.29 |

| H    | J    | K    | L    | M    | N    | P    | wt    |
|------|------|------|------|------|------|------|-------|
| .087 | .024 | .122 | .024 | .087 | .012 | .071 | grams |
| 2.21 | 0.61 | 3.10 | 0.61 | 2.21 | 0.30 | 1.80 | .020  |





CERAMIC

# Low Pass Filter

## LFCN-2250+

### TYPICAL PERFORMANCE DATA AT 25°C

| Frequency (MHz) | Insertion Loss (dB) | VSWR (:1) |
|-----------------|---------------------|-----------|
| 50.00           | 0.06                | 1.01      |
| 500.00          | 0.11                | 1.02      |
| 1000.00         | 0.15                | 1.05      |
| 1500.00         | 0.33                | 1.07      |
| 2000.00         | 0.51                | 1.06      |
| 2250.00         | 0.82                | 1.20      |
| 2575.00         | 2.84                | 2.10      |
| 2850.00         | 24.55               | 7.08      |
| 3800.00         | 48.40               | 32.18     |
| 4250.00         | 37.39               | 34.07     |
| 5000.00         | 33.16               | 36.97     |
| 6500.00         | 37.38               | 30.49     |
| 7200.00         | 30.64               | 39.49     |
| 8000.00         | 7.60                | 9.69      |
| 9000.00         | 14.79               | 30.49     |

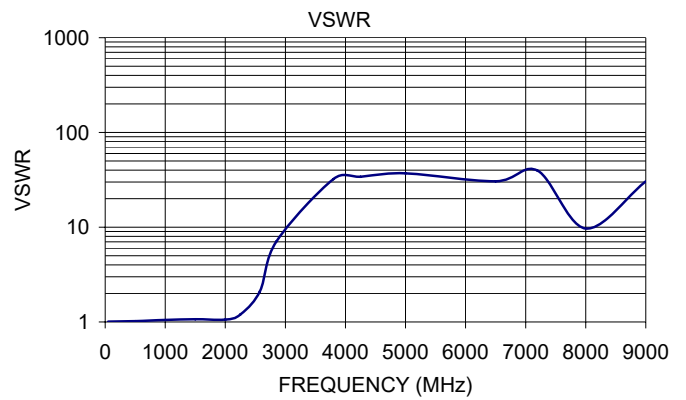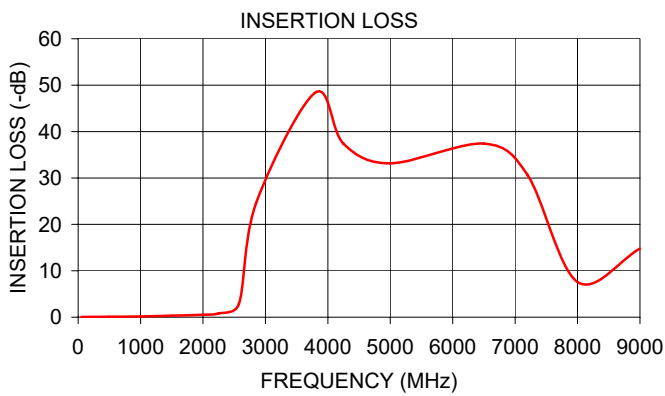

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LFCN-2250+](#) on WIN SOURCE

 [Mini-Circuits](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management