



**THE DATASHEET OF  
LL101C-GS18**



## Small Signal Schottky Diode



**DESIGN SUPPORT TOOLS** click logo to get started



### MECHANICAL DATA

**Case:** MiniMELF (SOD-80)

**Weight:** approx. 31 mg

**Cathode band color:** black

**Packaging codes/options:**

GS18/10K per 13" reel (8 mm tape), 10K/box

GS08/2.5K per 7" reel (8 mm tape), 12.5K/box

### FEATURES

- For general purpose applications
- The LL101 series is a metal-on-silicon Schottky barrier device which is protected by a PN junction guard ring
- The low forward voltage drop and fast switching make it ideal for protection of MOS devices, steering, biasing and coupling diodes for fast switching and low logic level applications
- Integrated protection ring against static discharge
- Low capacitance
- Low leakage current
- This diode is also available in the DO-35 (DO-204AH) case with type designation SD101A, SD101B, SD101C and in the SOD-123 case with type designation SD101AW, SD101BW, SD101CW
- AEC-Q101 qualified
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT

### APPLICATIONS

- HF-detector
- Protection circuit
- Diode for low currents with a low supply voltage
- Small battery charger
- Power supplies
- DC/DC converter for notebooks

| PARTS TABLE |  |                            |                       |               |
|-------------|--|----------------------------|-----------------------|---------------|
| PART        | TYPE DIFFERENTIATION   | ORDERING CODE              | CIRCUIT CONFIGURATION | REMARKS       |
| LL101A      | $V_R = 60\text{ V}$ , $V_F$ at $I_F = 1\text{ mA}$ max. 410 mV | LL101A-GS18 or LL101A-GS08 | Single                | Tape and reel |
| LL101B      | $V_R = 50\text{ V}$ , $V_F$ at $I_F = 1\text{ mA}$ max. 400 mV | LL101B-GS18 or LL101B-GS08 | Single                | Tape and reel |
| LL101C      | $V_R = 40\text{ V}$ , $V_F$ at $I_F = 1\text{ mA}$ max. 390 mV | LL101C-GS18 or LL101C-GS08 | Single                | Tape and reel |

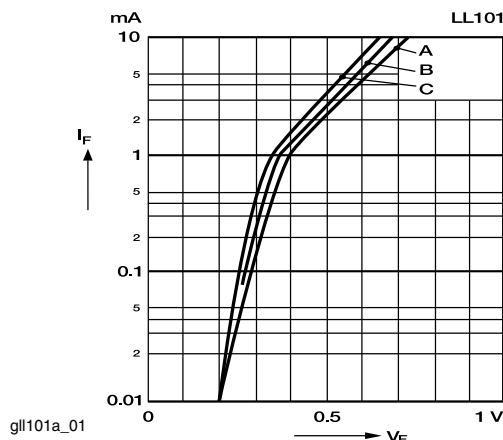
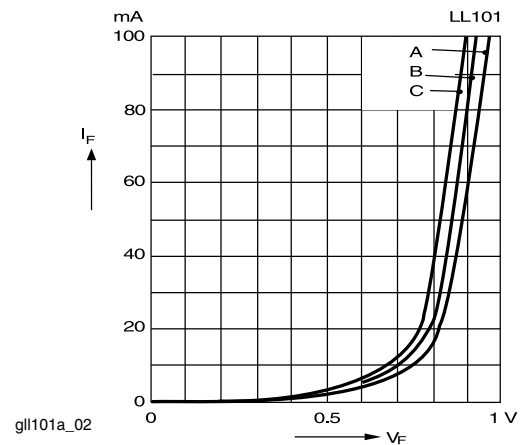
| ABSOLUTE MAXIMUM RATINGS ( $T_{amb} = 25\text{ }^\circ\text{C}$ , unless otherwise specified) |                |        |           |       |      |
|---|----------------|--------|-----------|-------|------|
| PARAMETER   | TEST CONDITION | PART   | SYMBOL    | VALUE | UNIT |
| Reverse voltage   |                | LL101A | $V_{RRM}$ | 60    | V    |
|   |                | LL101B | $V_{RRM}$ | 50    | V    |
|   |                | LL101C | $V_{RRM}$ | 40    | V    |
| Power dissipation (infinite heatsink) <sup>(1)</sup>  |                |        | $P_{tot}$ | 400   | mW   |
| Forward continuous current  |                |        | $I_F$     | 30    | mA   |
| Maximum single cycle surge 10 $\mu\text{s}$ square wave                                       |                |        | $I_{FSM}$ | 2     | A    |

**Note**

<sup>(1)</sup> Valid provided that electrodes are kept at ambient temperature

| <b>THERMAL CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |                                       |            |             |                    |
|---|---------------------------------------|------------|-------------|--------------------|
| PARAMETER   | TEST CONDITION                        | SYMBOL     | VALUE       | UNIT               |
| Junction temperature  |                                       | $T_j$      | 125         | $^{\circ}\text{C}$ |
| Storage temperature range   |                                       | $T_{stg}$  | -65 to +150 | $^{\circ}\text{C}$ |
| Thermal resistance junction to ambient air  | On PC board<br>50 mm x 50 mm x 1.6 mm | $R_{thJA}$ | 320         | K/W                |

| <b>ELECTRICAL CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |  |        |            |      |      |       |      |
|--|--|--------|------------|------|------|-------|------|
| PARAMETER  | TEST CONDITION                                   | PART   | SYMBOL     | MIN. | TYP. | MAX.  | UNIT |
| Reverse Breakdown Voltage  | $I_R = 10\text{ }\mu\text{A}$                    | LL101A | $V_{(BR)}$ | 60   |      |       | V    |
|  |  | LL101B | $V_{(BR)}$ | 50   |      |       | V    |
|  |  | LL101C | $V_{(BR)}$ | 40   |      |       | V    |
| Leakage current  | $V_R = 50\text{ V}$                              | LL101A | $I_R$      |      |      | 200   | nA   |
|  | $V_R = 40\text{ V}$                              | LL101B | $I_R$      |      |      | 200   | nA   |
|  | $V_R = 30\text{ V}$                              | LL101C | $I_R$      |      |      | 200   | nA   |
| Forward voltage drop   | $I_F = 1\text{ mA}$                              | LL101A | $V_F$      |      |      | 0.410 | V    |
|  |  | LL101B | $V_F$      |      |      | 0.400 | V    |
|  |  | LL101C | $V_F$      |      |      | 0.390 | V    |
|  | $I_F = 15\text{ mA}$                             | LL101A | $V_F$      |      |      | 1000  | mV   |
|  |  | LL101B | $V_F$      |      |      | 950   | mV   |
|  |  | LL101C | $V_F$      |      |      | 900   | mV   |
| Diode capacitance  | $V_R = 0\text{ V}$ , $f = 1\text{ MHz}$          | LL101A | $C_D$      |      |      | 2.0   | pF   |
|  |  | LL101B | $C_D$      |      |      | 2.1   | pF   |
|  |  | LL101C | $C_D$      |      |      | 2.2   | pF   |
| Reverse recovery time  | $I_F = I_R = 5\text{ mA}$ , recover to $0.1 I_R$ |        | $t_{rr}$   |      |      | 1     | ns   |

**TYPICAL CHARACTERISTICS** ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)

 Fig. 1 - Typ.  $I_F$  vs.  $V_F$  for Primary Conduction through the Schottky Barrier

 Fig. 2 - Typ.  $I_F$  of Combination Schottky Barrier and PN Junction Guard Ring

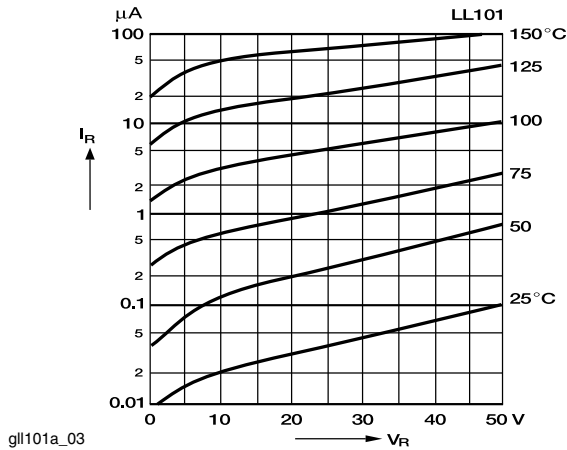


Fig. 3 - Typical Variation of Reverse Current at Various Temperatures

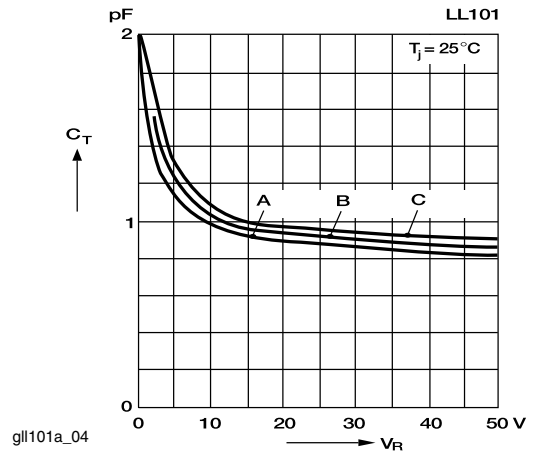
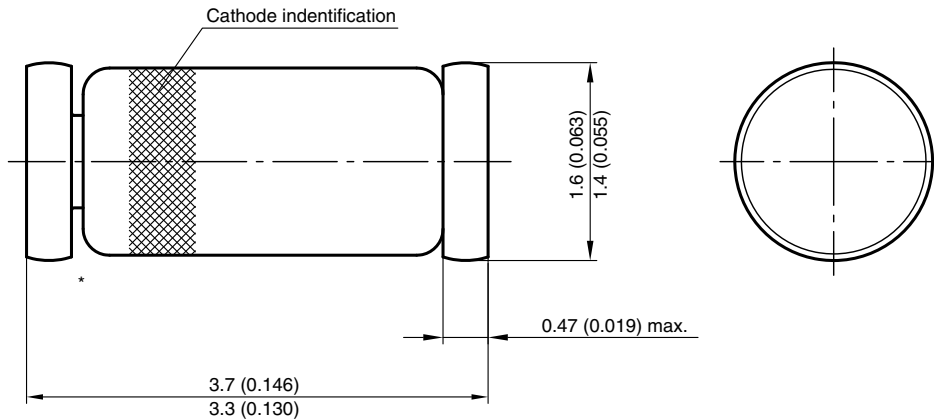
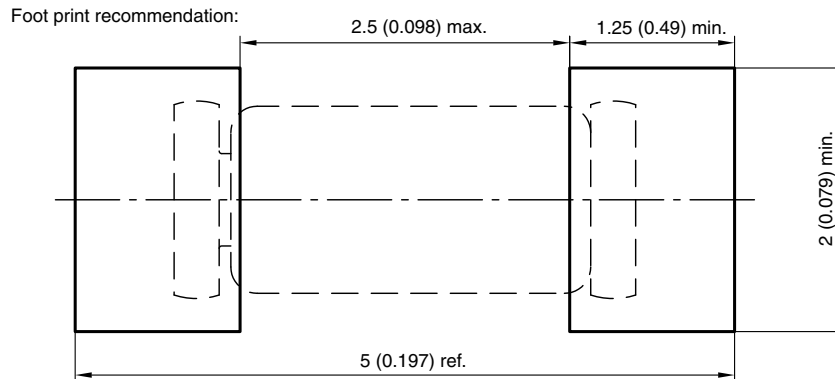


Fig. 4 - Typical Capacitance Curve as a Function of Reverse Voltage

### PACKAGE DIMENSIONS in millimeters (inches): **MiniMELF (SOD-80)**



\* The gap between plug and glass can be either on cathode or anode side



Document no.:6.560-5005.01-4  
Rev. 8 - Date: 07.June.2006  
96 12070



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LL101C-GS18 on WIN SOURCE](#)

 [Vishay Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management