




**THE DATASHEET OF
LM3S1138-IQC50-A2**



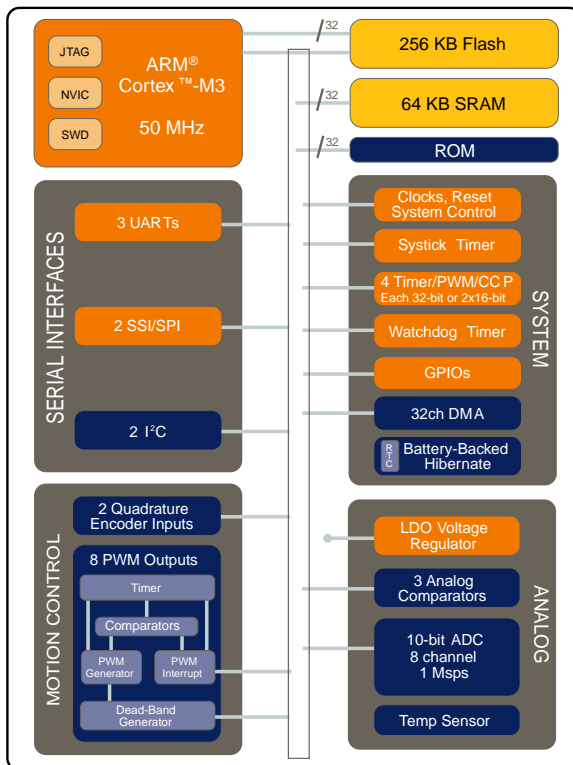

LM3S1000 Series Block Diagram. This block diagram shows the superset of features for the LM3S1000 series of microcontrollers.

Features

32-Bit RISC Performance

- 50-MHz operation with 32-bit ARM® Cortex™-M3 architecture
- Thumb®-compatible Thumb-2-only instruction set, with hardware-division and single-cycle-multiplication
- Integrated Nested Vectored Interrupt Controller (NVIC) provides deterministic interrupt handling
- 34 interrupt channels with eight priority levels
- Memory protection unit (MPU) provides a privileged mode for protected operating system functionality
- Unaligned data access enables data to be efficiently packed into memory
- Atomic bit manipulation (bit-banding) delivers maximum memory utilization and streamlined peripheral control

On-Chip Memory

- 64 KB single-cycle flash with two forms of flash protection on a 2-KB block basis
- 16 KB single-cycle SRAM

Flexible Timer Capability

- Four general-purpose timers, each configurable as one 32-bit or two 16-bit timers
- Real-Time Clock (RTC) capability
- 24-bit system (SysTick) timer
- 32-bit watchdog timer

Serial Interfaces

- Two synchronous serial interfaces (SSI) with master and slave modes for SPI, MICROWIRE, or TI synchronous serial
- Two I²C interfaces (master and slave)
- Three fully programmable 16C550-type UARTs with IrDA support

UART

- Three fully programmable 16C550-type UARTs with IrDA support
- Separate 16x8 transmit (TX) and 16x12 receive (RX) FIFOs to reduce CPU interrupt service loading
- Programmable baud-rate generator allowing speeds up to up to 3.125 Mbps

Analog-to-Digital Converter (ADC)

- Single- and differential-input configurations
- Eight 10-bit channels (inputs) when used as single-ended inputs
- Sample rate of one million samples/second
- On-chip temperature sensor

Analog Comparators

- Three independent integrated analog comparators
- Configurable for output to: drive an output pin, generate an interrupt, or initiate an ADC sample sequence
- Compare external pin input to external pin input or to internal programmable voltage reference

Inter-Integrated Circuit (I²C) Interface

- Two I²C modules
- Master and slave receive and transmit operation with transmission speed up to 100 Kbps in Standard mode and 400 Kbps in Fast mode
- Interrupt generation
- Master with arbitration and clock synchronization, multimaster support, and 7-bit addressing mode

GPIOs

- 9-46 GPIOs, depending on configuration
- 5-V-tolerant input/outputs
- Programmable interrupt generation
- Fast toggle capable of a change every two clock cycles
- Can initiate an ADC sample sequence

Power


- On-chip Low Drop-Out (LDO) voltage regulator, with programmable output user-adjustable from 2.25 V to 2.75 V
- Battery-backed hibernation module with real-time clock and 256-bytes of non-volatile memory
- 3.3-V supply brown-out detection
- Low-power options on controller: Sleep and Deep-sleep modes
- Low-power options for peripherals: software controls shutdown of individual peripherals
- User-enabled LDO unregulated voltage detection and automatic reset
- On-chip temperature sensor

Package and Temperature

- 100-pin RoHS-compliant LQFP package
 - Industrial-range (-40°C to +85°C)
 - Extended-range (-40°C to +105°C)
- 108-ball RoHS-compliant BGA package
 - Industrial-range (-40°C to +85°C)

Target Applications

- Motion control
- Factory automation
- Fire and security
- HVAC and building control
- Test and measurement equipment
- Remote monitoring
- Electronic point-of-sale (POS) machines
- Network appliances and switches
- Gaming equipment

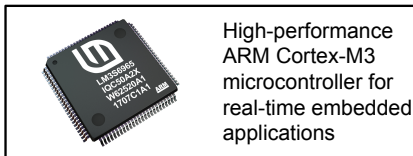

Ordering Information

Orderable Part Number	Description
LM3S1138-IBZ50-A2	Stellaris® LM3S1138 Microcontroller Industrial Temperature 108-ball BGA
LM3S1138-IBZ50-A2T	Stellaris® LM3S1138 Microcontroller Industrial Temperature 108-ball BGA Tape-and-reel
LM3S1138-EQC50-A2	Stellaris® LM3S1138 Microcontroller Extended Temperature 100-pin LQFP
LM3S1138-EQC50-A2T	Stellaris® LM3S1138 Microcontroller Extended Temperature 100-pin LQFP Tape-and-reel
LM3S1138-IQC50-A2	Stellaris® LM3S1138 Microcontroller Industrial Temperature 100-pin LQFP
LM3S1138-IQC50-A2T	Stellaris® LM3S1138 Microcontroller Industrial Temperature 100-pin LQFP Tape-and-reel

Evaluation Kit

The Stellaris® LM3S1968 Evaluation Kit provides the hardware and software tools to speed development using the LM3S1968 microcontroller's peripherals and Hibernation module. Ask your distributor for part number EKK-LM3S1968 (ARM RealView® MDK tools), EKI-LM3S1968 (IAR Embedded Workbench® tools), EKC-LM3S1968 (CodeSourcery Sourcery G++ tools), or EKT-LM3S1968 (Code Red Technologies Red Suite tools). See the website for the latest tools available.



Texas Instruments, Inc. • 108 Wild Basin, Suite 350 • Austin, TX 78746
Main: +1-512-279-8800 • Fax: +1-512-279-8879 • <http://www.luminarymicro.com>

Copyright © 2008-2009 Texas Instruments, Inc. All rights reserved. Stellaris and StellarisWare are registered trademarks of Texas Instruments. ARM and Thumb are registered trademarks and Cortex is a trademark of ARM Limited. Other names and brands may be claimed as the property of others.



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LM3S1138-IQC50-A2 on WIN SOURCE](#)

 [Texas Instruments](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management