THE DATASHEET OF

MAX6062BEUR+T

www.win-source.net 0086-755-83957316

19-1659; Rev 1; 4/01

MAXIM

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

General Description

The MAX6061–MAX6068 are precision, low-dropout, micropower voltage references. These three-terminal devices are available with output voltage options of 1.25V, 1.8V, 2.048V, 2.5V, 3V, 4.096V, 4.5V, and 5V. They feature a proprietary curvature-correction circuit and laser-trimmed thin-film resistors that result in a very low temperature coefficient of 20ppm/°C (max) and an initial accuracy of ±0.2% (max). Specifications apply to the extended temperature range (-40°C to +85°C).

The MAX6061–MAX6068 typically draw only 90µA of supply current and can source 5mA or sink 2mA of load current. Unlike conventional shunt-mode (two-terminal) references that waste supply current and require an external resistor, these devices offer a supply current that is virtually independent of the supply voltage (8µA/V variation) and do not require an external resistor. Additionally, the internally compensated devices do not require an external compensation capacitor. Eliminating the external compensation capacitor saves valuable board area in space-critical applications. Low dropout voltage and supply independent, ultra-low supply current make these devices ideal for battery-operated, high-performance, low-voltage systems.

The MAX6061–MAX6068 are available in a 3-pin SOT23 package.

Applications

Analog-to-Digital Converters (ADCs)
Portable Battery-Powered Systems
Notebook Computers
PDAs, GPSs, DMMs
Cellular Phones
Precision 3V/5V Systems

Typical Operating Circuit appears at end of data sheet.

Selector Guide

PART	OUTPUT VOLTAGE (V)	INPUT VOLTAGE (V)
MAX6061	1.248	2.5 to 12.6
MAX6068	1.800	2.5 to 12.6
MAX6062	2.048	2.5 to 12.6
MAX6066	2.500	(V_{OUT} + 200mV) to 12.6
MAX6063	3.000	(V_{OUT} + 200mV) to 12.6
MAX6064	4.096	(V_{OUT} + 200mV) to 12.6
MAX6067	4.500	(V_{OUT} + 200mV) to 12.6
MAX6065	5.000	(V_{OUT} + 200mV) to 12.6

Features

- ♦ **Ultra-Small 3-Pin SOT23 Package**
- ♦ **±0.2% (max) Initial Accuracy**
- ♦ **20ppm/°C (max) Temperature Coefficient**
- ♦ **5mA Source Current**
- ♦ **2mA Sink Current**
- ♦ **No Output Capacitor Required**
- ♦ **Stable with Capacitive Loads**
- ♦ **90µA (typ) Quiescent Supply Current**
- ♦ **200mV (max) Dropout at 1mA Load Current**
- ♦ **Output Voltage Options: 1.25V, 1.8V, 2.048V, 2.5V, 3V, 4.096V, 4.5V, 5V**
- ♦ **13µVp-p Noise 0.1Hz to 10Hz (MAX6061)**

Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE	TOP MARK
MAX6061AEUR-T	-40°C to +85°C	3 SOT23-3	FZFP
MAX6061BEUR-T	-40°C to +85°C	3 SOT23-3	FZFQ
MAX6062AEUR-T	-40°C to +85°C	3 SOT23-3	FZFY
MAX6062BEUR-T	-40°C to +85°C	3 SOT23-3	FZFZ
MAX6063AEUR-T	-40°C to +85°C	3 SOT23-3	FZFV
MAX6063BEUR-T	-40°C to +85°C	3 SOT23-3	FZFW
MAX6064AEUR-T	-40°C to +85°C	3 SOT23-3	FZGB
MAX6064BEUR-T	-40°C to +85°C	3 SOT23-3	FZGC
MAX6065AEUR-T	-40°C to +85°C	3 SOT23-3	FZGE
MAX6065BEUR-T	-40°C to +85°C	3 SOT23-3	FZGF
MAX6066AEUR-T	-40°C to +85°C	3 SOT23-3	FZFM
MAX6066BEUR-T	-40°C to +85°C	3 SOT23-3	FZFN

Note: *There is a minimum order increment of 2500 pieces for SOT23 packages.*

Ordering Information continued at end of data sheet.

Pin Configuration

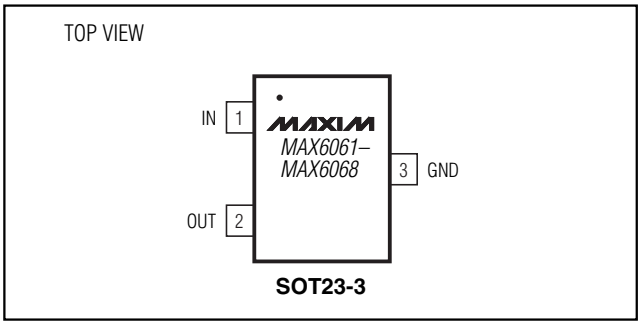

SOT23-3

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

ABSOLUTE MAXIMUM RATINGS

(Voltages Referenced to GND)
IN .....-0.3V to +13.5V
OUT .....-0.3V to (V_{IN} + 0.3V)
Output Short-Circuit Duration to GND or IN (V_{IN} < 6V)...Continuous
Output Short-Circuit Duration to GND or IN (V_{IN} ≥ 6V).....60s

Continuous Power Dissipation (T_A = +70°C)
3-Pin SOT23 (derate 4.0mW/°C above +70°C).....320mW
Operating Temperature Range .....-40°C to +85°C
Storage Temperature Range .....-65°C to +150°C
Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—MAX6061, V_{OUT} = 1.25V

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	MAX6061A (0.32%)	1.244	1.248	1.252	V
			MAX6061B (0.48%)	1.242	1.248	1.254	
Output Voltage Temperature Coefficient (Note 2)	TCV_{OUT}	MAX6061A			6	20	ppm/°C
		MAX6061B			6	30	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	2.5V ≤ V_{IN} ≥ 12.6V			10	90	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	Sourcing: 0 ≤ I_{OUT} ≤ 5mA			0.5	0.9	mV/mA
		Sinking: -2mA ≤ I_{OUT} ≤ 0			1.3	3.0	
OUT Short-Circuit Current	I_{SC}	Short to GND			25		mA
		Short to IN			25		
Long-Term Stability	ΔV_{OUT}/time	1000hr at +25°C			62		ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔV_{OUT}/cycle				130		ppm
DYNAMIC CHARACTERISTICS							
Noise Voltage	e_{OUT}	f = 0.1Hz to 10Hz			13		µVp-p
		f = 10Hz to 10kHz			15		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	V_{IN} = 5V ± 100mV, f = 120Hz			86		dB
Turn-On Settling Time	t_R	To V_{OUT} = 0.1% of final value, C_{OUT} = 50pF			50		µs
INPUT CHARACTERISTICS							
Supply Voltage Range	V_{IN}	Guaranteed by line regulation test		2.5		12.6	V
Quiescent Supply Current	I_{IN}				90	125	µA
Change in Supply Current	$\Delta I_{IN}/\Delta V_{IN}$	2.5V ≤ V_{IN} ≤ 12.6V			3.4	8.0	µA/V

ELECTRICAL CHARACTERISTICS—MAX6068, V_{OUT} = 1.80V

(V_{IN} = +5V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	MAX6068A (0.17%)	1.797	1.800	1.803	V
			MAX6068B (0.39%)	1.793	1.800	1.807	
Output Voltage Temperature Coefficient (Note 2)	TCV_{OUT}	MAX6068A			6	20	ppm/°C
		MAX6068B			6	30	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	2.5V ≤ V_{IN} ≥ 12.6V			33	200	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	Sourcing: 0 ≤ I_{OUT} ≤ 5mA			0.5	0.9	mV/mA
		Sinking: -2mA ≤ I_{OUT} ≤ 0			1.5	4	
OUT Short-Circuit Current	I_{SC}	Short to GND			25		mA
		Short to IN			25		
Long-Term Stability	ΔV_{OUT}/time	1000hr at +25°C			62		ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔV_{OUT}/cycle				130		ppm
DYNAMIC CHARACTERISTICS							
Noise Voltage	e_{OUT}	f = 0.1Hz to 10Hz			22		µVp-p
		f = 10Hz to 10kHz			25		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	V_{IN} = 5V ±100mV, f = 120Hz			86		dB
Turn-On Settling Time	t_R	To V_{OUT} = 0.1% of final value, C_{OUT} = 50pF			115		µs
INPUT CHARACTERISTICS							
Supply Voltage Range	V_{IN}	Guaranteed by line regulation test		2.5		12.6	V
Quiescent Supply Current	I_{IN}				90	125	µA
Change in Supply Current	$\Delta I_{IN}/\Delta V_{IN}$	2.5V ≤ V_{IN} ≤ 12.6V			3.3	8.0	µA/V

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6062, V_{OUT} = 2.048V

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	MAX6062A (0.24%)	2.043	2.048	2.053	V
			MAX6062B (0.39%)	2.040	2.048	2.056	
Output Voltage Temperature Coefficient (Note 2)	TCV_{OUT}	MAX6062A			6	20	ppm/°C
		MAX6062B			6	30	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	2.5V ≤ V_{IN} ≤ 12.6V			33	200	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	Sourcing: 0 ≤ I_{OUT} ≤ 5mA			0.5	0.9	mV/mA
		Sinking: -2mA ≤ I_{OUT} ≤ 0			1.5	4	
OUT Short-Circuit Current	I_{SC}	Short to GND			25		mA
		Short to IN			25		
Long-Term Stability	ΔV_{OUT}/time	1000hr at +25°C			62		ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔV_{OUT}/cycle				130		ppm
DYNAMIC CHARACTERISTICS							
Noise Voltage	e_{OUT}	f = 0.1Hz to 10Hz			22		µVp-p
		f = 10Hz to 10kHz			25		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	V_{IN} = 5V ±100mV, f = 120Hz			86		dB
Turn-On Settling Time	t_R	To V_{OUT} = 0.1% of final value, C_{OUT} = 50pF			115		µs
INPUT CHARACTERISTICS							
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test		2.5		12.6	V
Quiescent Supply Current	I_{IN}				90	125	µA
Change in Supply Current	I_{IN}/V_{IN}	2.5V ≤ V_{IN} ≤ 12.6V			3.3	8.0	µA/V

ELECTRICAL CHARACTERISTICS—MAX6066, V_{OUT} = 2.500V

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	MAX6066A (0.2%)	2.495	2.500	2.505	V
			MAX6066B (0.4%)	2.490	2.500	2.510	
Output Voltage Temperature Coefficient (Note 2)	TCV_{OUT}	MAX6066A			6	20	ppm/°C
		MAX6066B			6	30	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	$(V_{OUT} + 0.2V) \le V_{IN} \le 12.6V$			60	300	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	Sourcing: $0 \le I_{OUT} \le 5mA$			0.5	0.9	mV/mA
		Sinking: $-2mA \le I_{OUT} \le 0$			1.6	5	
Dropout Voltage (Note 4)	$V_{IN} - V_{OUT}$	I_{OUT} = 1mA			50	200	mV
OUT Short-Circuit Current	I_{SC}	Short to GND			25		mA
		Short to IN			25		
Long-Term Stability	ΔV_{OUT}/time	1000hr at +25°C			62		ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔV_{OUT}/cycle				130		ppm
DYNAMIC CHARACTERISTICS							
Noise Voltage	e_{OUT}	f = 0.1Hz to 10Hz			27		µVp-p
		f = 10Hz to 10kHz			30		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	V_{IN} = 5V ±100mV, f = 120Hz			86		dB
Turn-On Settling Time	t_R	To V_{OUT} = 0.1% of final value, C_{OUT} = 50pF			115		µs
INPUT CHARACTERISTICS							
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test		V_{OUT} + 0.2		12.6	V
Quiescent Supply Current	I_{IN}				90	125	µA
Change in Supply Current	I_{IN}/V_{IN}	$(V_{OUT} + 0.2V) \le V_{IN} \le 12.6V$			3.3	8.0	µA/V

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6063, V_{OUT} = 3.0V

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	MAX6063A (0.2%)	2.994	3.000	3.006	V
			MAX6063B (0.4%)	2.988	3.000	3.012	
Output Voltage Temperature Coefficient (Note 2)	TCV_{OUT}	MAX6063A			6	20	ppm/°C
		MAX6063B			6	30	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	$(V_{OUT} + 0.2V) \le V_{IN} \le 12.6V$			90	400	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	Sourcing: $0 \le I_{OUT} \le 5mA$			0.5	0.9	mV/mA
		Sinking: $-2mA \le I_{OUT} \le 0$			2.0	6.0	
Dropout Voltage (Note 4)	$V_{IN} - V_{OUT}$	I_{OUT} = 1mA			50	200	mV
OUT Short-Circuit Current	I_{SC}	Short to GND			25		mA
		Short to IN			25		
Long-Term Stability	ΔV_{OUT}/time	1000hr at +25°C			62		ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔV_{OUT}/cycle				130		ppm
DYNAMIC CHARACTERISTICS							
Noise Voltage	e_{OUT}	f = 0.1Hz to 10Hz			35		µVp-p
		f = 10Hz to 10kHz			40		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	V_{IN} = 5V ±100mV, f = 120Hz			76		dB
Turn-On Settling Time	t_R	To V_{OUT} = 0.1% of final value, C_{OUT} = 50pF			115		µs
INPUT CHARACTERISTICS							
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test		V_{OUT} + 0.2		12.6	V
Quiescent Supply Current	I_{IN}				90	125	µA
Change in Supply Current	I_{IN}/V_{IN}	$(V_{OUT} + 0.2V) \le V_{IN} \le 12.6V$			3.4	8.0	µA/V

ELECTRICAL CHARACTERISTICS—MAX6064, V_{OUT} = 4.096V

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	MAX6064A (0.2%)	4.088	4.096	4.104	V
			MAX6064B (0.4%)	4.080	4.096	4.112	
Output Voltage Temperature Coefficient (Note 2)	TCV_{OUT}	MAX6064A			6	20	ppm/°C
		MAX6064B			6	30	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	$(V_{OUT}$ + 0.2V) ≤ V_{IN} ≤ 12.6V			130	430	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	Sourcing: 0 ≤ I_{OUT} ≤ 5mA			0.5	0.9	mV/mA
		Sinking: -2mA ≤ I_{OUT} ≤ 0			2.2	8	
Dropout Voltage (Note 4)	V_{IN} - V_{OUT}	I_{OUT} = 1mA			50	200	mV
OUT Short-Circuit Current	I_{SC}	Short to GND			25		mA
		Short to IN			25		
Long-Term Stability	ΔV_{OUT}/time	1000hr at +25°C			62		ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔV_{OUT}/cycle				130		ppm
DYNAMIC CHARACTERISTICS							
Noise Voltage	e_{OUT}	f = 0.1Hz to 10Hz			50		µVp-p
		f = 10Hz to 10kHz			50		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	V_{IN} = 5V ±100mV, f = 120Hz			72		dB
Turn-On Settling Time	t_R	To V_{OUT} = 0.1% of final value, C_{OUT} = 50pF			190		µs
INPUT CHARACTERISTICS							
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test		V_{OUT} + 0.2		12.6	V
Quiescent Supply Current	I_{IN}				90	125	µA
Change in Supply Current	I_{IN}/V_{IN}	$(V_{OUT}$ + 0.2V) ≤ V_{IN} ≤ 12.6V			3.2	8.0	µA/V

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6067, V_{OUT} = 4.500V

(V_{IN} = +5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	MAX6067A (0.2%)	4.491	4.500	4.509	V
			MAX6067B (0.4%)	4.482	4.500	4.518	
Output Voltage Temperature Coefficient (Note 2)	TCV_{OUT}	MAX6067A			6	20	ppm/°C
		MAX6067B			6	30	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	$(V_{OUT} + 0.2V) \le V_{IN} \le 12.6V$			170	550	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	Sourcing: $0 \le I_{OUT} \le 5mA$			0.5	0.9	mV/mA
		Sinking: $-2mA \le I_{OUT} \le 0$			2.4	8	
Dropout Voltage (Note 4)	$V_{IN} - V_{OUT}$	I_{OUT} = 1mA			50	200	mV
OUT Short-Circuit Current	I_{SC}	Short to GND			25		mA
		Short to IN			25		
Long-Term Stability	ΔV_{OUT}/time	1000hr at +25°C			62		ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔV_{OUT}/cycle				130		ppm
DYNAMIC CHARACTERISTICS							
Noise Voltage	e_{OUT}	f = 0.1Hz to 10Hz			55		µVp-p
		f = 10Hz to 10kHz			55		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	V_{IN} = 5V ±100mV, f = 120Hz			70		dB
Turn-On Settling Time	t_R	To V_{OUT} = 0.1% of final value, C_{OUT} = 50pF			230		µs
INPUT CHARACTERISTICS							
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test		V_{OUT} + 0.2		12.6	V
Quiescent Supply Current	I_{IN}				90	125	µA
Change in Supply Current	I_{IN}/V_{IN}	$(V_{OUT} + 0.2V) \le V_{IN} \le 12.6V$			3.2	8.0	µA/V

ELECTRICAL CHARACTERISTICS—MAX6065, V_{OUT} = 5.000V

(V_{IN} = +5.2V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	MAX6065A (0.2%)	4.990	5.000	5.010	V
			MAX6065B (0.4%)	4.980	5.000	5.020	
Output Voltage Temperature Coefficient (Note 2)	TCV_{OUT}	MAX6065A			6	20	ppm/°C
		MAX6065B			6	30	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	(V_{OUT} + 0.2V) ≤ V_{IN} ≤ 12.6V			180	550	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	Sourcing: 0 ≤ I_{OUT} ≤ 5mA			0.5	0.9	mV/mA
		Sinking: -2mA ≤ I_{OUT} ≤ 0			2.4	8.0	
Dropout Voltage (Note 4)	V_{IN} - V_{OUT}	I_{OUT} = 1mA			50	200	mV
OUT Short-Circuit Current	I_{SC}	Short to GND			25		mA
		Short to IN			25		
Long-Term Stability	ΔV_{OUT}/time	1000hr at +25°C			62		ppm/1000hr
Output Voltage Hysteresis (Note 3)	ΔV_{OUT}/cycle				130		ppm
DYNAMIC CHARACTERISTICS							
Noise Voltage	e_{OUT}	f = 0.1Hz to 10Hz			60		µVp-p
		f = 10Hz to 10kHz			60		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	V_{IN} = 5V ±100mV, f = 120Hz			65		dB
Turn-On Settling Time	t_R	To V_{OUT} = 0.1% of final value, C_{OUT} = 50pF			300		µs
INPUT CHARACTERISTICS							
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test		V_{OUT} + 0.2		12.6	V
Quiescent Supply Current	I_{IN}				90	125	µA
Change in Supply Current	I_{IN}/V_{IN}	(V_{OUT} + 0.2V) ≤ V_{IN} ≤ 12.6V			3.2	8.0	µA/V

Note 1: All devices are 100% production tested at T_A = +25°C and are guaranteed by design for T_A = T_{MIN} to T_{MAX}, as specified.
Note 2: Temperature Coefficient is measured by the "box" method, i.e., the maximum ΔV_{OUT} is divided by the maximum ΔT.
Note 3: Temperature Hysteresis is defined as the change in +25°C output voltage before and after cycling the device from T_{MIN} to T_{MAX}.
Note 4: Dropout voltage is the minimum input voltage at which V_{OUT} changes ≤ 0.2% from V_{OUT} at V_{IN} = 5.0V (V_{IN} = 5.5V for MAX6065).

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

Typical Operating Characteristics

(V_{IN} = +5V for MAX6061–MAX6068, V_{IN} = +5.5V for MAX6065, I_{OUT} = 0, T_A = +25°C, unless otherwise noted.) (Note 5)

MAX6062
OUTPUT VOLTAGE TEMPERATURE DRIFT

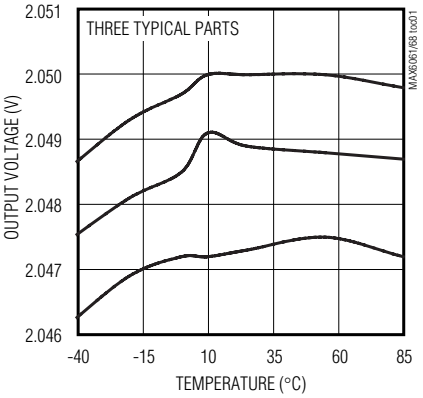

MAX6065
OUTPUT VOLTAGE TEMPERATURE DRIFT

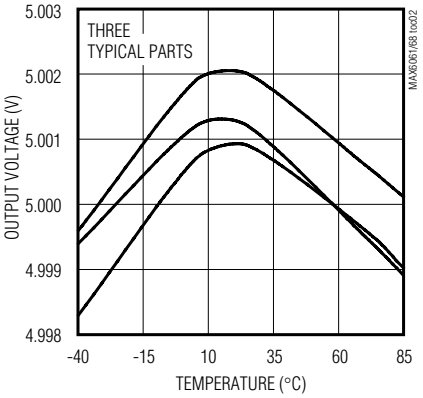

MAX6061
LINE REGULATION

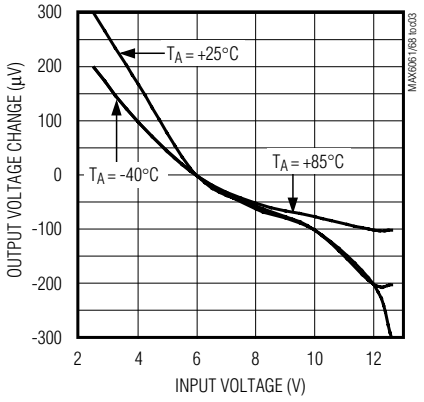

MAX6065
LINE REGULATION

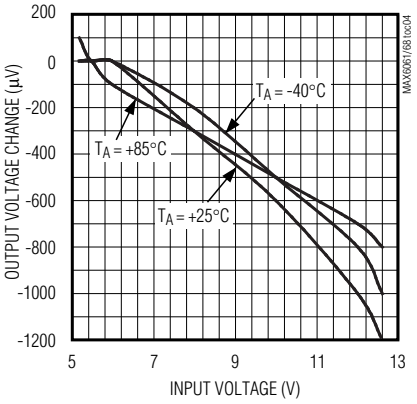

MAX6061
LOAD REGULATION

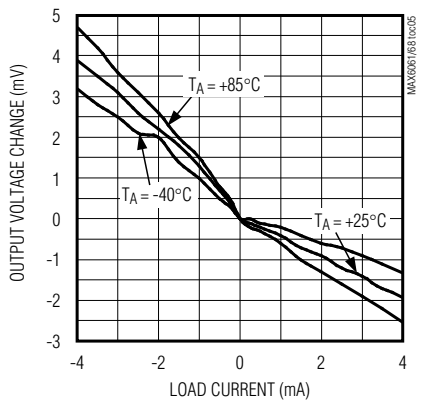

MAX6065
LOAD REGULATION

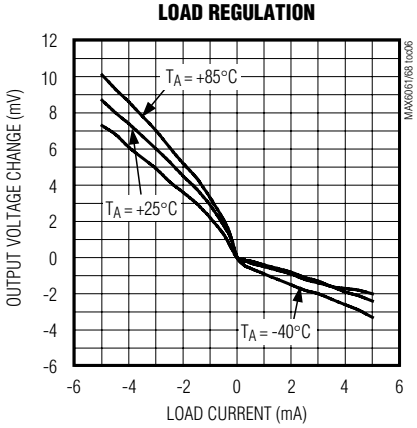

MAX6066
DROPOUT VOLTAGE
vs. LOAD CURRENT

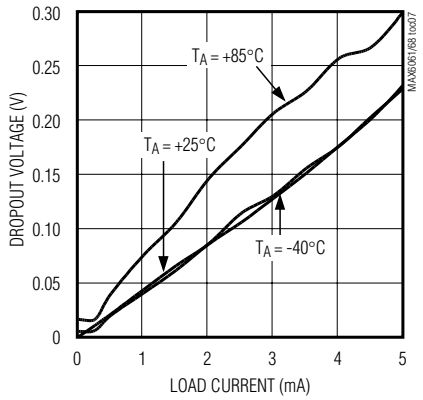

MAX6065
DROPOUT VOLTAGE
vs. LOAD CURRENT

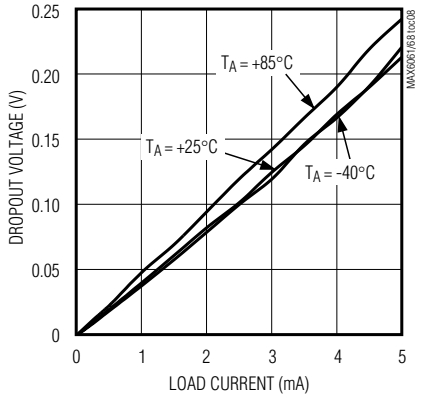

MAX6061
POWER-SUPPLY REJECTION RATIO
vs. FREQUENCY

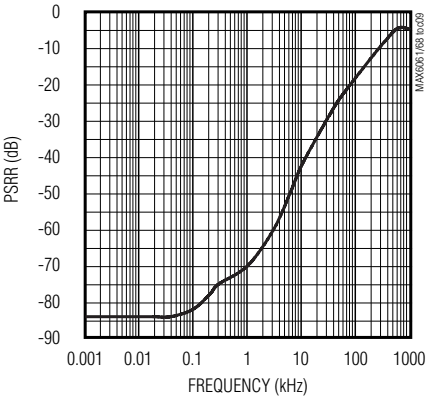

Typical Operating Characteristics (continued)

(V_{IN} = +5V for MAX6061–MAX6068, V_{IN} = +5.5V for MAX6065, I_{OUT} = 0, T_A = +25°C, unless otherwise noted.) (Note 5)

MAX6065
POWER-SUPPLY REJECTION RATIO vs. FREQUENCY

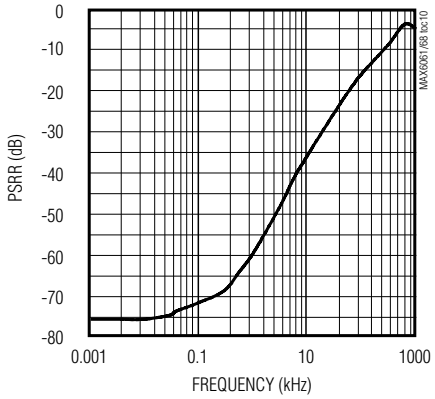

MAX6061
SUPPLY CURRENT vs. INPUT VOLTAGE

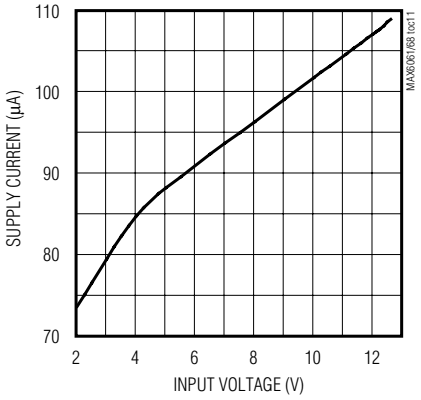

MAX6065
SUPPLY CURRENT vs. INPUT VOLTAGE

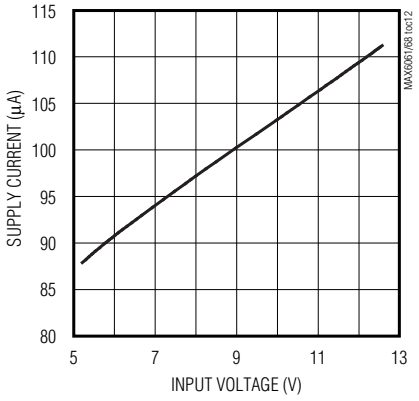

MAX6061
SUPPLY CURRENT vs. TEMPERATURE

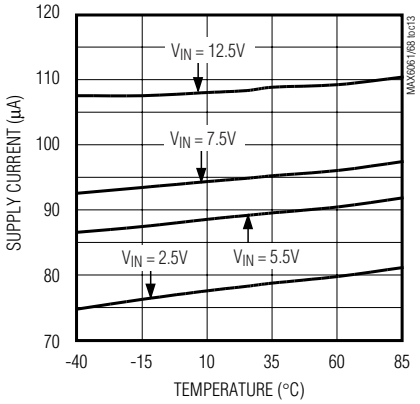

MAX6065
SUPPLY CURRENT vs. TEMPERATURE

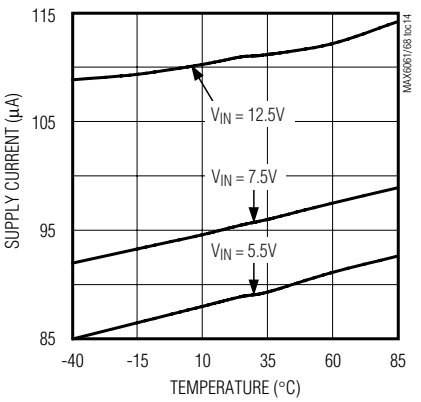

MAX6061
OUTPUT IMPEDANCE vs. FREQUENCY

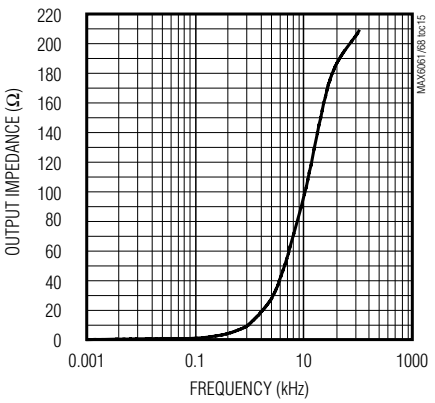

MAX6065
OUTPUT IMPEDANCE vs. FREQUENCY

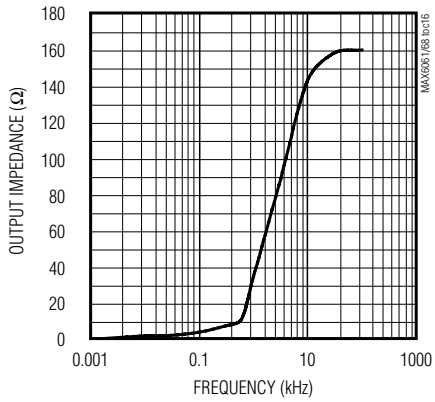

MAX6061
0.1Hz TO 10Hz OUTPUT NOISE

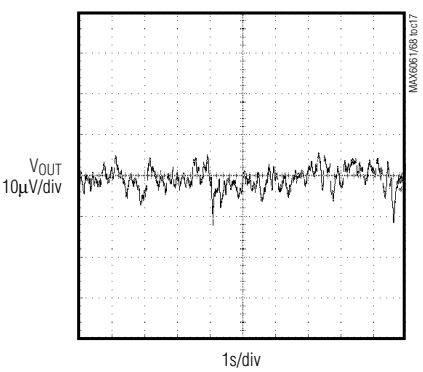

MAX6065
NOISE

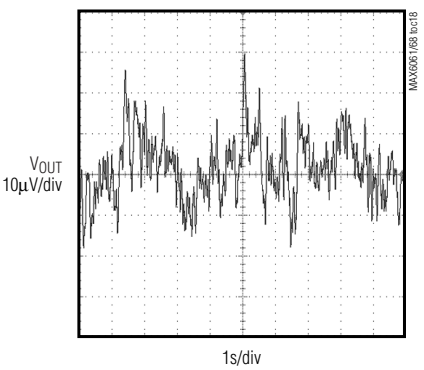

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

Typical Operating Characteristics (continued)

(V_{IN} = +5V for MAX6061–MAX6068, V_{IN} = +5.5V for MAX6065, I_{OUT} = 0, T_A = +25°C, unless otherwise noted.) (Note 5)

MAX6061
TURN-ON TRANSIENT
(C_L = 50pF)

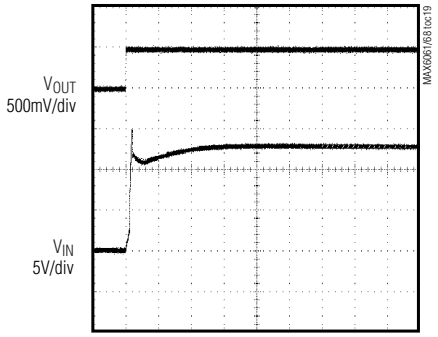

MAX6065
TURN-ON TRANSIENT
(C_L = 50pF)

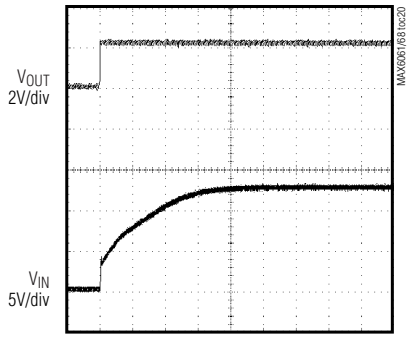

MAX6061
LOAD TRANSIENT
(I_{OUT} = ±250µA, V_{IN} = 5.0, C_L = 0)

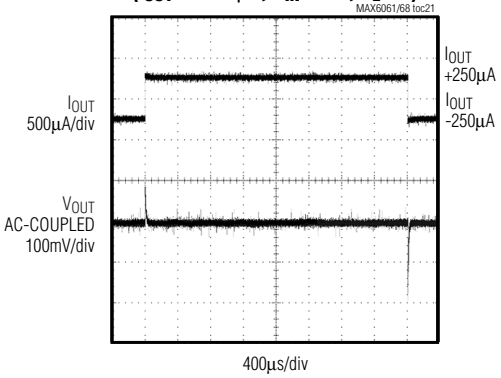

MAX6065
LOAD TRANSIENT
(I_{OUT} = ±250µA, C_L = 0, V_{IN} = 5.5V)

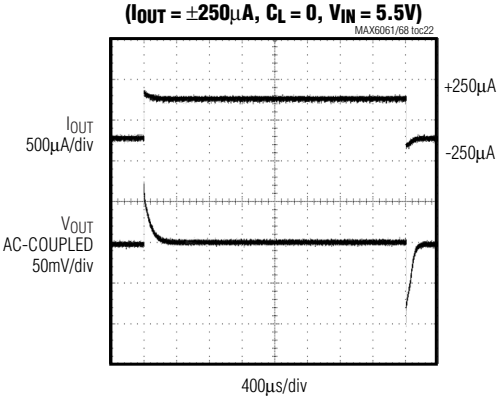

MAX6061
LOAD TRANSIENT
(I_{OUT} = ±250µA, V_{IN} = 5.0V, C_L = 1µF)

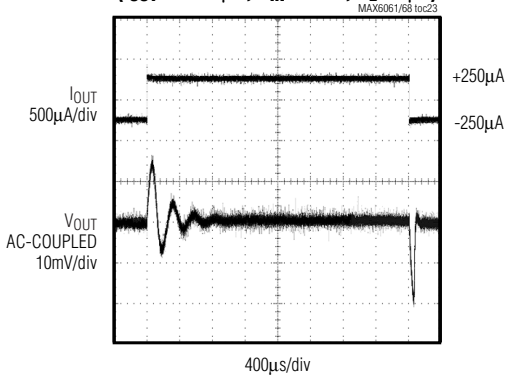

MAX6065
LOAD TRANSIENT
(I_{OUT} = ±250µA, C_L = 1µF, V_{IN} = 5.5V)

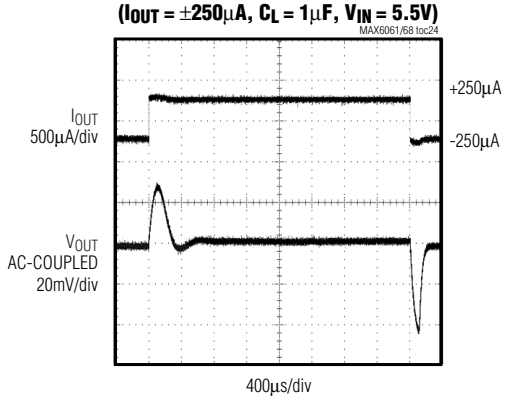

Typical Operating Characteristics (continued)

(V_{IN} = +5V for MAX6061–MAX6068, V_{IN} = +5.5V for MAX6065, I_{OUT} = 0, T_A = +25°C, unless otherwise noted.) (Note 5)

MAX6061
LOAD TRANSIENT
(V_{IN} = 5.0V, C_L = 0, I_{OUT} = ±2mA)

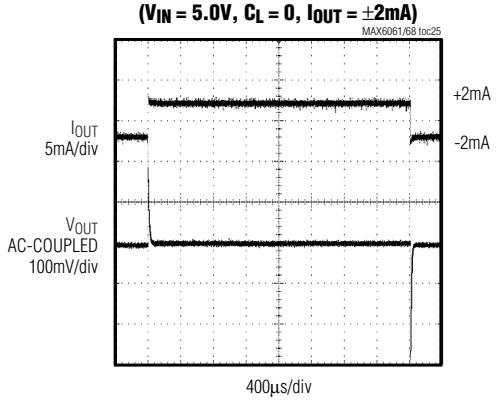

MAX6065
LOAD TRANSIENT
(C_L = 0, I_{OUT} = ±2mA, V_{IN} = 5.5V)

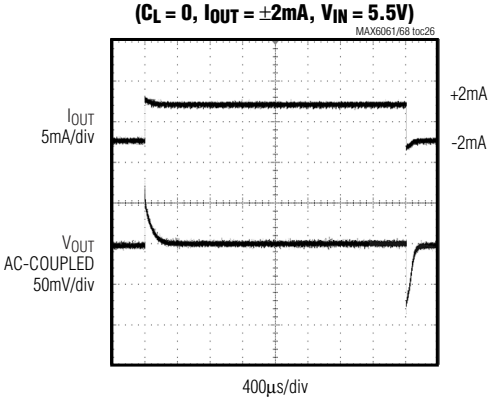

MAX6061
LOAD TRANSIENT
(V_{IN} = 5.0V, C_L = 1µF, I_{OUT} = ±2mA)

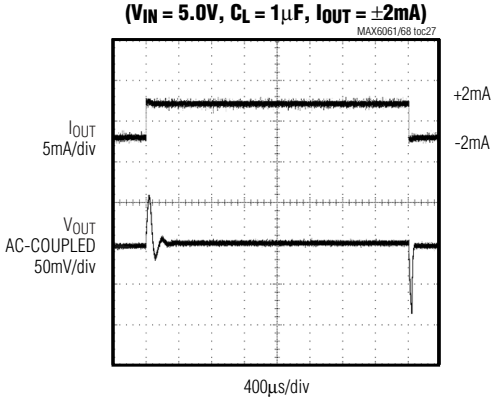

MAX6065
LOAD TRANSIENT
(C_L = 1µF, I_{OUT} = ±2mA, V_{IN} = 5.5V)

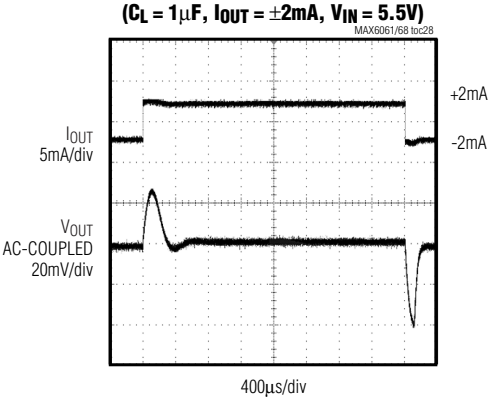

MAX6061
LOAD TRANSIENT
(V_{IN} = 5.0V, C_L = 0, I_{OUT} = ±4mA)

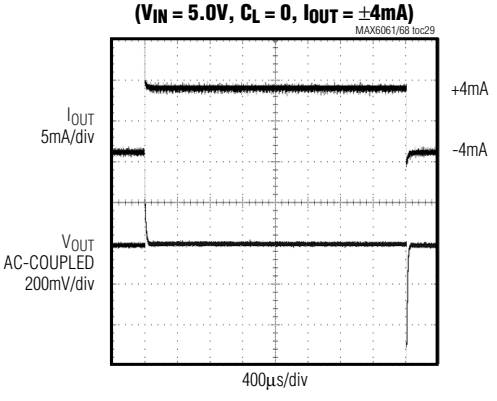

MAX6065
LOAD TRANSIENT
(I_{OUT} = ±5mA, C_L = 0, V_{IN} = 5.5V)

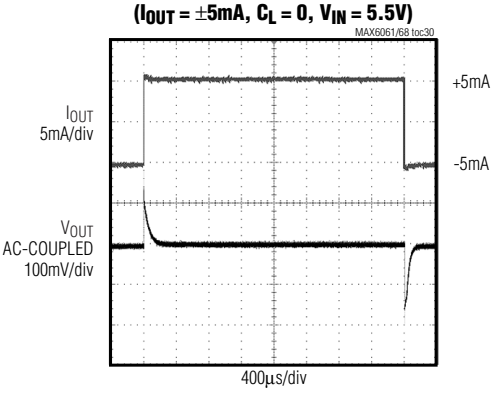

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

Typical Operating Characteristics (continued)

(V_{IN} = +5V for MAX6061–MAX6068, V_{IN} = +5.5V for MAX6065, I_{OUT} = 0, T_A = +25°C, unless otherwise noted.) (Note 5)

MAX6061
LOAD TRANSIENT
(V_{IN} = 5.0V, C_L = 1µF, I_{OUT} = ±4mA)

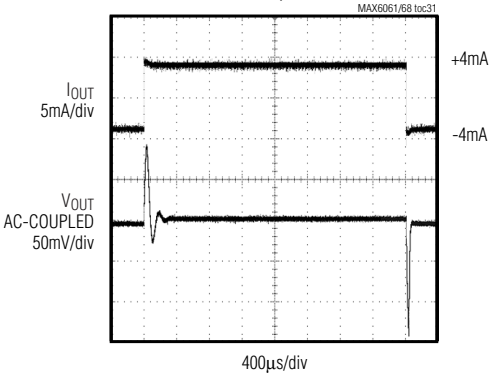

MAX6065
LOAD TRANSIENT
(I_{OUT} = ±5mA, C_L = 1µF, V_{IN} = 5.5V)

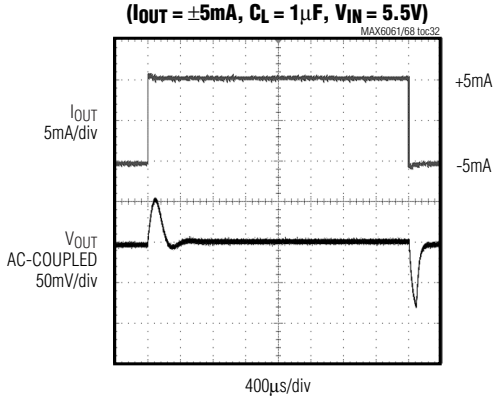

MAX6061
LINE TRANSIENT
(C_L = 0)

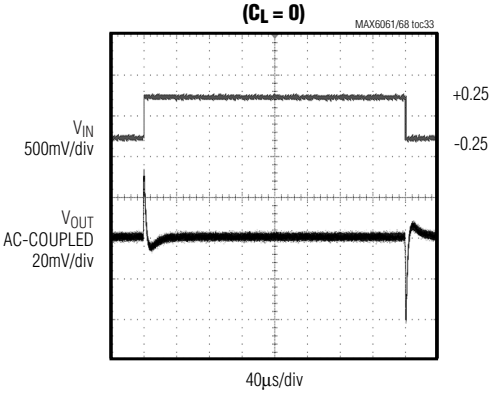

MAX6065
LINE TRANSIENT
(C_L = 0)

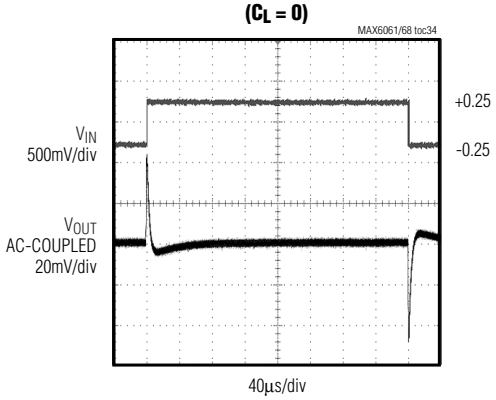

Note 5: Many of the MAX6061 family *Typical Operating Characteristics* are extremely similar. The extremes of these characteristics are found in the MAX6061 (1.25V output) and the MAX6065 (5.0V output). The *Typical Operating Characteristics* of the remainder of the MAX6061 family, typically lie between these two extremes and can be estimated based on their output voltages.

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

Pin Description

PIN	NAME	FUNCTION
1	IN	Input Voltage
2	OUT	Reference Output
3	GND	Ground

Applications Information

Input Bypassing

For the best line-transient performance, decouple the input with a 0.1µF ceramic capacitor as shown in the *Typical Operating Circuit*. Locate the capacitor as close to IN as possible. Where transient performance is less important, no capacitor is necessary.

Output/Load Capacitance

Devices in the MAX6061 family do not require an output capacitance for frequency stability. In applications where the load or the supply can experience step changes, an output capacitor of at least 0.1µF will reduce the amount of overshoot (undershoot) and improve the circuit's transient response. Many applications do not require an external capacitor, and the MAX6061 family can offer a significant advantage in these applications when board space is critical.

Supply Current

The quiescent supply current of the series-mode MAX6061 family is typically 90µA and is virtually independent of the supply voltage, with only an 8µA/V (max) variation with supply voltage. Unlike series references, shunt-mode references operate with a series resistor connected to the power supply. The quiescent current of a shunt-mode reference is thus a function of the input voltage. Additionally, shunt-mode references have to be biased at the maximum expected load current, even if the load current is not present at the time. In the MAX6061 family, the load current is drawn from the input voltage only when required, so supply current is not wasted and efficiency is maximized at all input voltages. This improved efficiency reduces power dissipation and extends battery life. When the supply voltage is below the minimum specified input voltage (as during turn-on), the devices can draw up to 400µA beyond the nominal supply current. The input voltage source must be capable of providing this current to ensure reliable turn-on.

Typical Operating Circuit

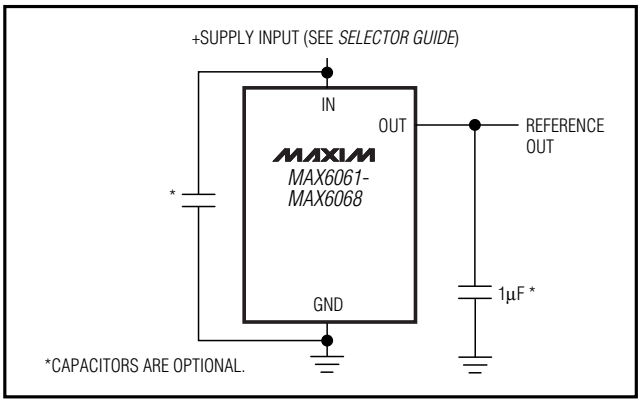

Ordering Information (continued)

PART	TEMP. RANGE	PIN-PACKAGE	TOP MARK
MAX6067AEUR-T	-40°C to +85°C	3 SOT23-3	FZFS
MAX6067BEUR-T	-40°C to +85°C	3 SOT23-3	FZFT
MAX6068AEUR-T	-40°C to +85°C	3 SOT23-3	FZIB
MAX6068BEUR-T	-40°C to +85°C	3 SOT23-3	FZIC

Output Voltage Hysteresis

Output voltage hysteresis is the change of output voltage at T_A = +25°C before and after the device is cycled over its entire operating temperature range. Hysteresis is caused by differential package stress appearing across the bandgap core transistors. The typical temperature hysteresis value is 130ppm.

Turn-On Time

These devices typically turn on and settle to within 0.1% of their final value in 50µs to 300µs, depending on the device. The turn-on time can increase up to 1.5ms with the device operating at the minimum dropout voltage and the maximum load.

Chip Information

TRANSISTOR COUNT: 117

PROCESS: BiCMOS

Precision, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

Package Information

SOTPO3L.EPS

NOTES:
1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
3. CONTROLLING DIMENSION: MILLIMETER

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.031	0.047	0.787	1.194
A1	0.001	0.005	0.025	0.127
B	0.014	0.022	0.356	0.559
C	0.0034	0.006	0.086	0.152
D	0.105	0.120	2.667	3.048
E	0.047	0.055	1.194	1.397
e	0.070	0.080	1.778	2.032
H	0.082	0.098	2.083	2.489
L	0.004	0.012	0.102	0.305
S	0.017	0.022	0.432	0.559
α	0°	8°	0°	8°

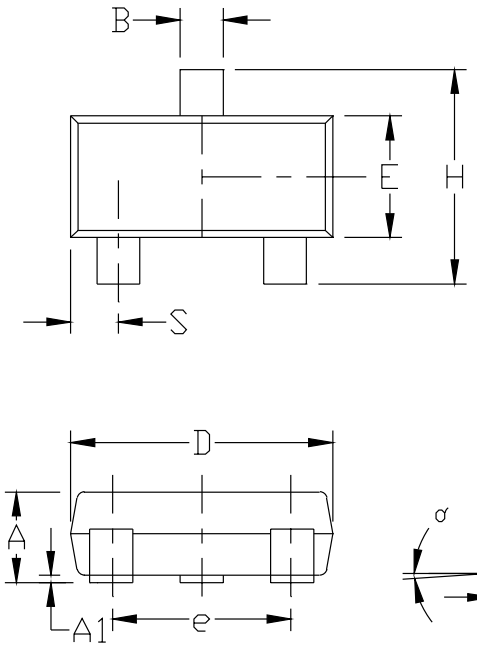

MAXIM
PROPRIETARY INFORMATION
TITLE:
PACKAGE OUTLINE,SOT-23, 3L
APPROVAL | DOCUMENT CONTROL NO. 21-0051 | REV C | 1/1

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2001 Maxim Integrated Products Printed USA MAXIM is a registered trademark of Maxim Integrated Products.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View MAX6062BEUR+T on WIN SOURCE
- Maxim Integrated Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management