



**THE DATASHEET OF  
MC3303N**




# MC3303, MC3403 QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101C – FEBRUARY 1979 – REVISED FEBRUARY 2002

- Wide Range of Supply Voltages, Single Supply . . . 3 V to 36 V or Dual Supplies
- Class AB Output Stage
- True Differential Input Stage
- Low Input Bias Current
- Internal Frequency Compensation
- Short-Circuit Protection
- Designed to Be Interchangeable With Motorola MC3303, MC3403

MC3303 . . . D, N, OR PW PACKAGE  
MC3403 . . . D, DB, N, NS, OR PW PACKAGE  
(TOP VIEW)

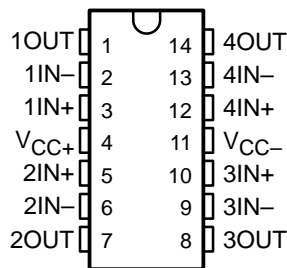

## description

The MC3303 and the MC3403 are quadruple operational amplifiers similar in performance to the  $\mu$ A741, but with several distinct advantages. They are designed to operate from a single supply over a range of voltages from 3 V to 36 V. Operation from split supplies also is possible, provided the difference between the two supplies is 3 V to 36 V. The common-mode input range includes the negative supply. Output range is from the negative supply to  $V_{CC} - 1.5$  V. Quiescent supply currents are less than one-half those of the  $\mu$ A741.


The MC3303 is characterized for operation from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , and the MC3403 is characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

## AVAILABLE OPTIONS

| $T_A$   | $V_{IO\text{MAX}}$<br>AT $25^{\circ}\text{C}$ | PACKAGE                             |   |                       |   |
|---|---|-------------------------------------|---|-----------------------|---|
|   |   | PLASTIC<br>SMALL OUTLINE<br>(D, NS) | PLASTIC SHRINK<br>SMALL OUTLINE<br>(DB) | PLASTIC<br>DIP<br>(N) | PLASTIC<br>THIN SHRINK<br>SMALL OUTLINE<br>(PW) |
| $0^{\circ}\text{C}$ to $70^{\circ}\text{C}$   | 10 mV   | MC3403D<br>MC3403NS                 | MC3403DB                                | MC3403N               | MC3403PW  |
| $-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ | 8 mV  | MC3303D                             | —                                       | MC3303N               | MC3303PW  |

The D package is available taped and reeled. Add R suffix to the device type (e.g., MC3403DR). The DB, NS, and PW packages are only available taped and reeled.

## logic diagram (each amplifier)

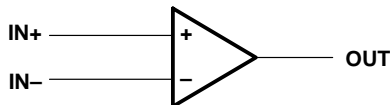

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS  
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2002, Texas Instruments Incorporated

# MC3303, MC3403 QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101C – FEBRUARY 1979 – REVISED FEBRUARY 2002

## schematic (each amplifier)

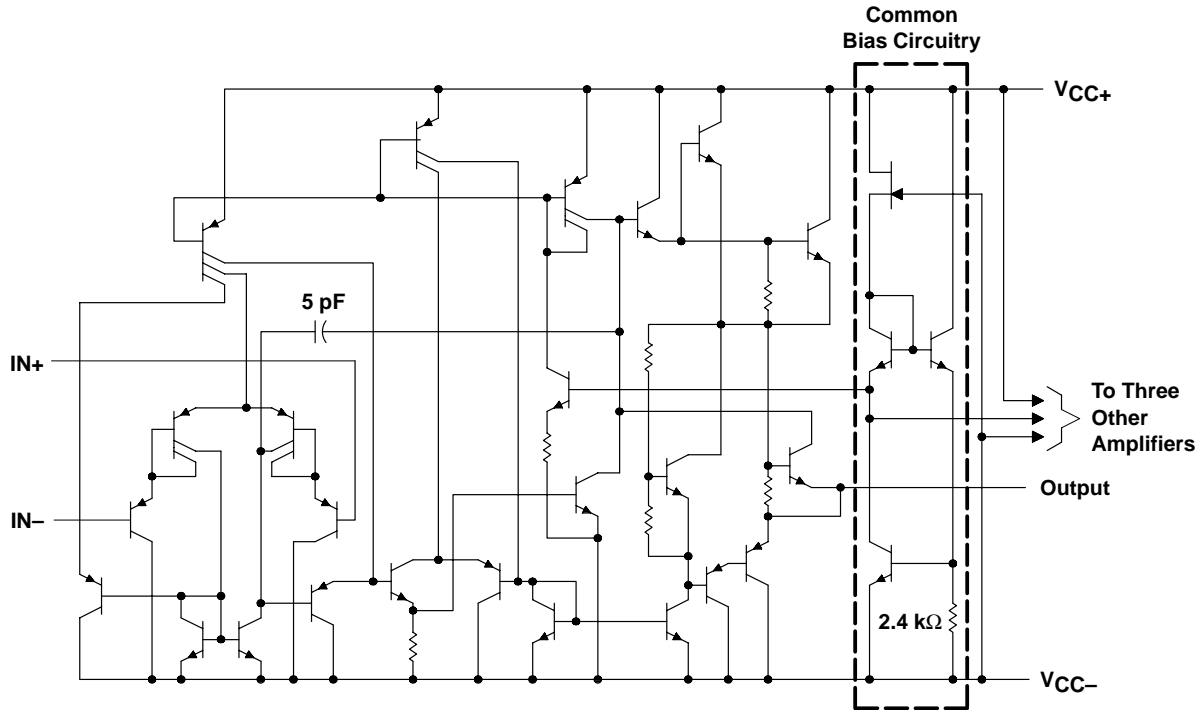

Component values shown are nominal.

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

|  |                |
|--|----------------|
| Supply voltage (see Note 1): $V_{CC+}$ .....                       | 18 V           |
| $V_{CC-}$ .....  | -18 V          |
| Supply voltage, $V_{CC+}$ with respect to $V_{CC-}$ .....          | 36 V           |
| Differential input voltage (see Note 2) .....                      | ±36 V          |
| Input voltage (see Notes 1 and 3) .....                            | ±18 V          |
| Package thermal impedance, $\theta_{JA}$ (see Note 4):             |                |
| D package .....  | 86°C/W         |
| DB package .....   | 96°C/W         |
| N package .....  | 80°C/W         |
| NS package .....   | 76°C/W         |
| PW package .....   | 113°C/W        |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds ..... | 260°C          |
| Storage temperature range, $T_{stg}$ .....                         | -65°C to 150°C |

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. These voltage values are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .
  2. Differential voltages are at IN+ with respect to IN-.
  3. Neither input must ever be more positive than  $V_{CC+}$  or more negative than  $V_{CC-}$ .
  4. The package thermal impedance is calculated in accordance with JESD 51-7.

# MC3303, MC3403

## QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101C – FEBRUARY 1979 – REVISED FEBRUARY 2002

### recommended operating conditions

|                     |                                | MIN              | MAX  | UNIT |    |
|---------------------|--------------------------------|------------------|------|------|----|
| V <sub>CC</sub>     | Supply voltage                 | 5                | 30   | V    |    |
| Dual-supply voltage |                                | V <sub>CC+</sub> | 2.5  | 15   | V  |
|                     |                                | V <sub>CC-</sub> | -2.5 | -15  | V  |
| T <sub>A</sub>      | Operating free-air temperature | MC3303           | -40  | 85   | °C |
|                     |                                | MC3403           | 0    | 70   |    |

**electrical characteristics at specified free-air temperature, V<sub>CC+</sub> = 14 V, V<sub>CC-</sub> = 0 V for MC3303, V<sub>CC±</sub> = ±15 V for MC3403 (unless otherwise noted)**

| PARAMETER                   | TEST CONDITION†  | MC3303  |            |                        | MC3403                   |                        |                          | UNIT |     |    |
|-----------------------------|--|---|------------|------------------------|--------------------------|------------------------|--------------------------|------|-----|----|
|                             |  | MIN   | TYP        | MAX                    | MIN                      | TYP                    | MAX                      |      |     |    |
| V <sub>IO</sub>             | Input offset voltage   | See Note 5  | 25°C       | 2                      | 8                        | 2                      | 10                       | mV   |     |    |
|                             |  |   |            | Full range             | 10                       | 12                     |                          |      |     |    |
| α <sub>V<sub>IO</sub></sub> | Temperature coefficient of input offset voltage                  | See Note 5  | Full range | 10                     | 10                       | μV/°C                  |                          |      |     |    |
| I <sub>IO</sub>             | Input offset current   | See Note 5  | 25°C       | 30                     | 75                       | 30                     | 50                       | nA   |     |    |
|                             |  |   |            | Full range             | 250                      | 200                    |                          |      |     |    |
| α <sub>I<sub>IO</sub></sub> | Temperature coefficient of input offset current                  | See Note 5  | Full range | 50                     | 50                       | pA/C                   |                          |      |     |    |
| I <sub>IB</sub>             | Input bias current   | See Note 5  | 25°C       | -0.2                   | -0.5                     | -0.2                   | -0.5                     | μA   |     |    |
|                             |  |   |            | Full range             | -1                       | -0.8                   |                          |      |     |    |
| V <sub>ICR</sub>            | Common-mode input voltage range‡                                 |   | 25°C       | V <sub>CC-</sub> to 12 | V <sub>CC-</sub> to 12.5 | V <sub>CC-</sub> to 13 | V <sub>CC-</sub> to 13.5 | V    |     |    |
| V <sub>OM</sub>             | Peak output voltage swing  | R <sub>L</sub> = 10 kΩ  | 25°C       | 12                     | 12.5                     | ±12                    | ±13.5                    | V    |     |    |
|                             |  |   | 25°C       | 10                     | 12                       | ±10                    | ±13                      |      |     |    |
|                             |  |   | Full range | 10                     | ±10                      |                        |                          |      |     |    |
| A <sub>VD</sub>             | Large-signal differential voltage amplification                  | V <sub>O</sub> = ±10 V, R <sub>L</sub> = 2 kΩ                                 | 25°C       | 20                     | 200                      | 20                     | 200                      | V/mV |     |    |
|                             |  |   | Full range | 15                     | 15                       |                        |                          |      |     |    |
| B <sub>OM</sub>             | Maximum-output-swing bandwidth                                   | V <sub>OPP</sub> = 20 V, A <sub>VD</sub> = 1, THD ≤ 5%, R <sub>L</sub> = 2 kΩ | 25°C       | 9                      | 9                        | kHz                    |                          |      |     |    |
| B <sub>1</sub>              | Unity-gain bandwidth   | V <sub>O</sub> = 50 mV, R <sub>L</sub> = 10 kΩ                                | 25°C       | 1                      | 1                        | MHz                    |                          |      |     |    |
| φ <sub>m</sub>              | Phase margin   | C <sub>L</sub> = 200 pF, R <sub>L</sub> = 2 kΩ                                | 25°C       | 60°                    | 60°                      |                        |                          |      |     |    |
| r <sub>i</sub>              | Input resistance   | f = 20 Hz   | 25°C       | 0.3                    | 1                        | 0.3                    | 1                        | MΩ   |     |    |
| r <sub>o</sub>              | Output resistance  | f = 20 Hz   | 25°C       | 75                     | 75                       | Ω                      |                          |      |     |    |
| CMRR                        | Common-mode rejection ratio                                      | V <sub>IC</sub> = V <sub>ICRmin</sub>   | 25°C       | 70                     | 90                       | 70                     | 90                       | dB   |     |    |
| k <sub>SVS</sub>            | Supply voltage sensitivity (ΔV <sub>IO</sub> /ΔV <sub>CC</sub> ) | V <sub>CC±</sub> = ±2.5 to ±15 V  | 25°C       | 30                     | 150                      | 30                     | 150                      | μV/V |     |    |
| I <sub>OS</sub>             | Short-circuit output current§                                    |   | 25°C       | ±10                    | ±30                      | ±45                    | ±10                      | ±30  | ±45 | mA |
| I <sub>CC</sub>             | Total supply current   | No load, See Note 5   | 25°C       | 2.8                    | 7                        | 2.8                    | 7                        | mA   |     |    |

† All characteristics are measured under open-loop conditions with zero common-mode voltage unless otherwise specified. Full range for T<sub>A</sub> is -40°C to 85°C for MC3303, and 0°C to 70°C for MC3403.

‡ The V<sub>ICR</sub> limits are linked directly, volt-for-volt, to supply voltage; the positive limit is 2 V less than V<sub>CC+</sub>.

§ Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

NOTE 5: V<sub>IO</sub>, I<sub>IO</sub>, I<sub>IB</sub>, and I<sub>CC</sub> are defined at V<sub>O</sub> = 0 for MC3403 and V<sub>O</sub> = 7 V for MC3303.



# MC3303, MC3403 QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101C – FEBRUARY 1979 – REVISED FEBRUARY 2002

electrical characteristics,  $V_{CC+} = 5\text{ V}$ ,  $V_{CC-} = 0\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

| PARAMETER       | TEST CONDITIONS†  | MC3303   |     |     | MC3403          |      |                 | UNIT            |      |
|-----------------|---|--|-----|-----|-----------------|------|-----------------|-----------------|------|
|                 |   | MIN  | TYP | MAX | MIN             | TYP  | MAX             |                 |      |
| $V_{IO}$        | Input offset voltage  | $V_O = 2.5\text{ V}$   |     |     | 10              | 2    | 10              | mV              |      |
| $I_{IO}$        | Input offset current  | $V_O = 2.5\text{ V}$   |     |     | 75              | 30   | 50              | nA              |      |
| $I_{IB}$        | Input bias current  | $V_O = 2.5\text{ V}$   |     |     | -0.5            | -0.2 | -0.5            | $\mu\text{A}$   |      |
| $V_{OM}$        | Peak output voltage swing‡                                      | $R_L = 10\text{ k}\Omega$  |     |     | 3.3             | 3.5  | 3.3             | 3.5             | V    |
|                 |   | $R_L = 10\text{ k}\Omega$ ,<br>$V_{CC+} = 5\text{ V to }30\text{ V}$ |     |     | $V_{CC+} - 1.7$ |      | $V_{CC+} - 1.7$ |                 |      |
| $A_{VD}$        | Large-signal differential voltage amplification                 | $V_O = 1.7\text{ V to }3.3\text{ V}$ , $R_L = 2\text{ k}\Omega$      |     |     | 20              | 200  | 20              | 200             | V/mV |
| $k_{SVS}$       | Supply-voltage sensitivity ( $\Delta V_{IO}/\Delta V_{CC\pm}$ ) | $V_{CC\pm} = \pm 2.5\text{ V to } \pm 15\text{ V}$                   |     |     | 150             |      |                 | $\mu\text{V/V}$ |      |
| $I_{CC}$        | Supply current  | $V_O = 2.5\text{ V}$ , No load                                       |     |     | 2.5             | 7    | 2.5             | 7               | mA   |
| $V_{O1}/V_{O2}$ | Crosstalk attenuation   | $f = 1\text{ kHz to }20\text{ kHz}$                                  |     |     | 120             |      | 120             |                 | dB   |

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified.

‡ Output will swing essentially to ground.

operating characteristics,  $V_{CC+} = 14\text{ V}$ ,  $V_{CC-} = 0\text{ V}$  for MC3303,  $V_{CC\pm} = \pm 15\text{ V}$  for MC3403,  $T_A = 25^\circ\text{C}$ ,  $A_{VD} = 1$  (unless otherwise noted)

| PARAMETER | TEST CONDITIONS         |                               |                          |                             | TYP          | UNIT |                  |
|-----------|-------------------------|-------------------------------|--------------------------|-----------------------------|--------------|------|------------------|
| SR        | Slew rate at unity gain | $V_I = \pm 10\text{ V}$ ,     | $C_L = 100\text{ pF}$ ,  | $R_L = 2\text{ k}\Omega$ ,  | See Figure 1 | 0.6  | V/ $\mu\text{s}$ |
| $t_r$     | Rise time               | $\Delta V_O = 50\text{ mV}$ , | $C_L = 100\text{ pF}$ ,  | $R_L = 10\text{ k}\Omega$ , | See Figure 1 | 0.35 | $\mu\text{s}$    |
| $t_f$     | Fall time               | $\Delta V_O = 50\text{ mV}$ , | $C_L = 100\text{ pF}$ ,  | $R_L = 10\text{ k}\Omega$ , | See Figure 1 | 0.35 | $\mu\text{s}$    |
|           | Overshoot factor        | $\Delta V_O = 50\text{ mV}$ , | $C_L = 100\text{ pF}$ ,  | $R_L = 10\text{ k}\Omega$ , | See Figure 1 | 20   | %                |
|           | Crossover distortion    | $V_I(PP) = 30\text{ mV}$ ,    | $V_{OPP} = 2\text{ V}$ , | $f = 10\text{ kHz}$         |              | 1    | %                |

## PARAMETER MEASUREMENT INFORMATION

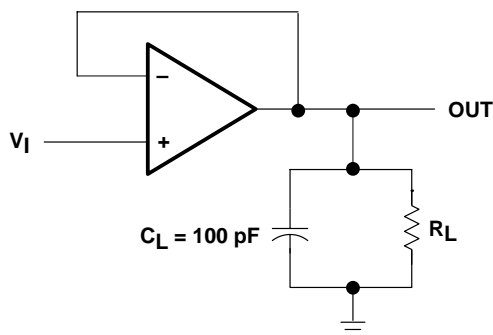


Figure 1. Unity-Gain Amplifier

TYPICAL CHARACTERISTICS†

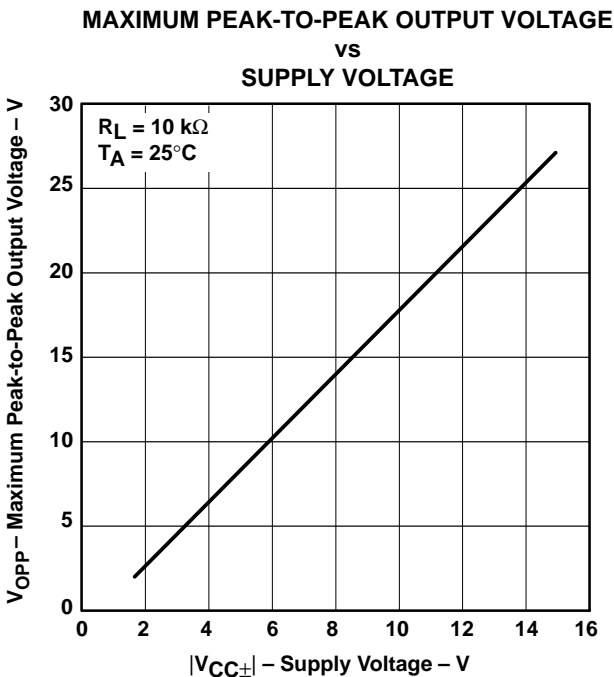


Figure 2

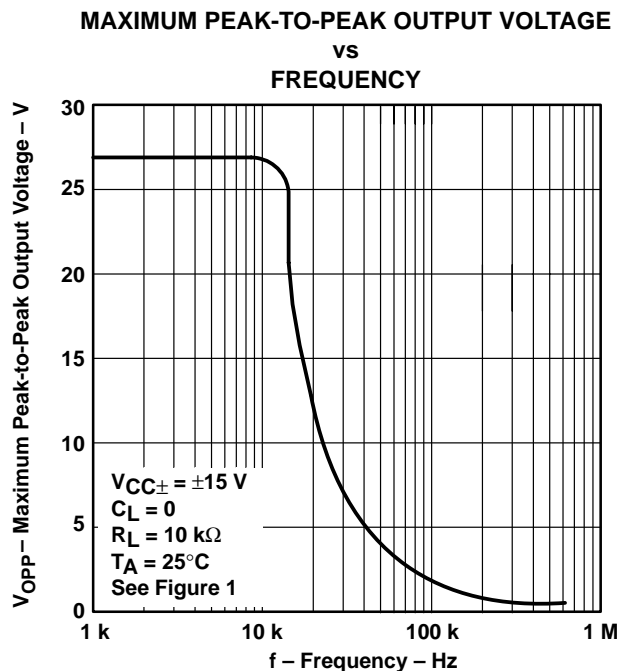


Figure 3

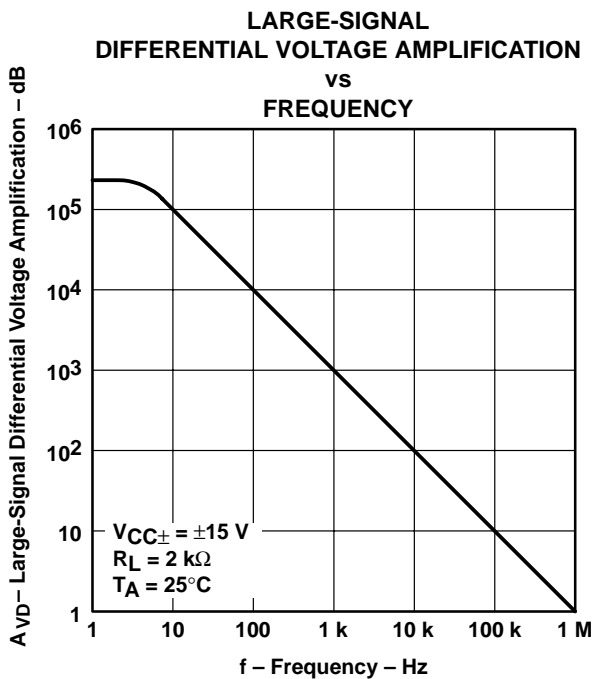


Figure 4

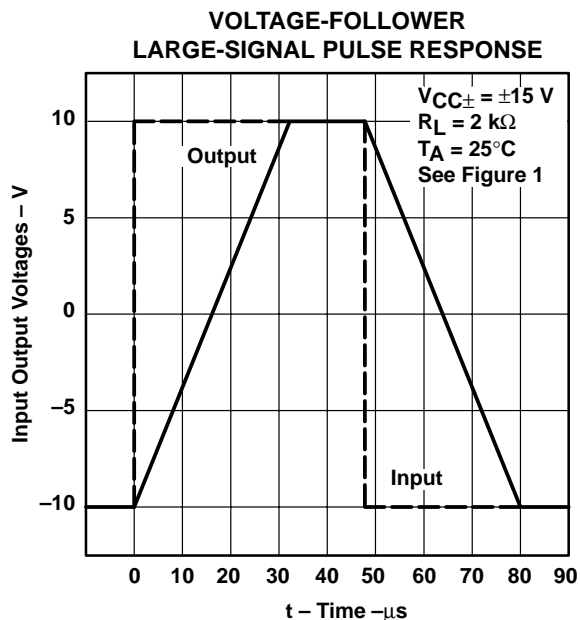


Figure 5

† Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.

# MC3303, MC3403 QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101C – FEBRUARY 1979 – REVISED FEBRUARY 2002

## TYPICAL CHARACTERISTICS†

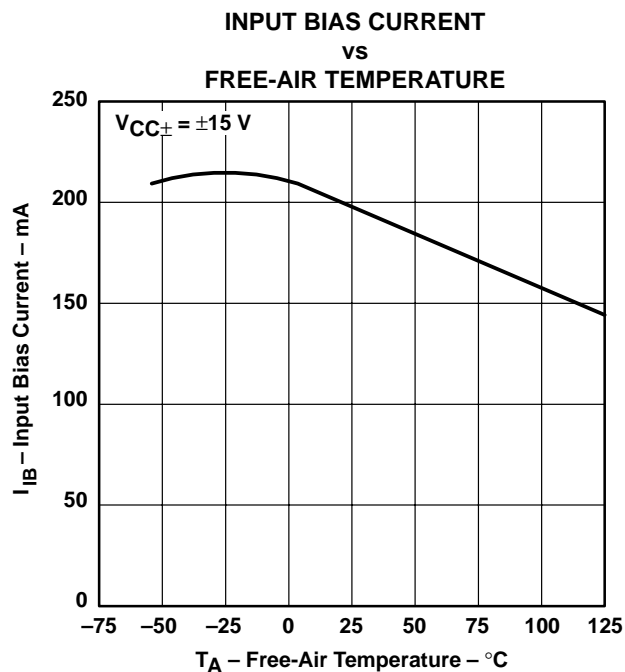


Figure 6

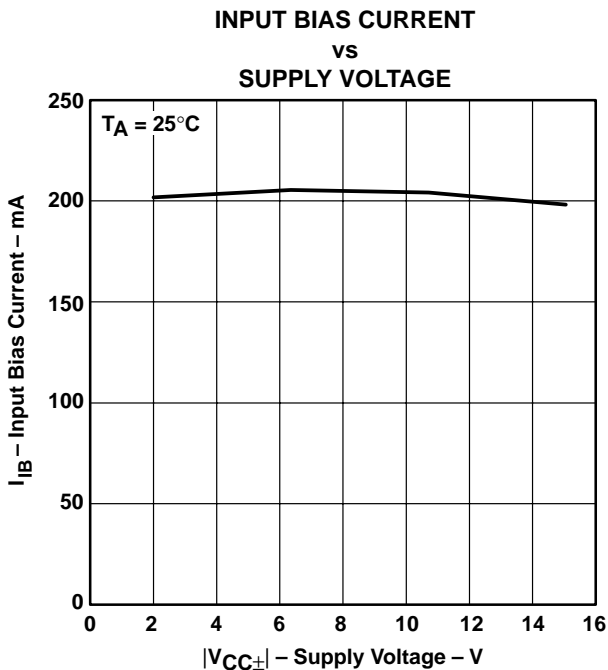


Figure 7

† Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2)         | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| MC3303D          | ACTIVE        | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | MC3303                  | <a href="#">Samples</a> |
| MC3303DG4        | ACTIVE        | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | MC3303                  | <a href="#">Samples</a> |
| MC3303DR         | ACTIVE        | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | MC3303                  | <a href="#">Samples</a> |
| MC3303N          | ACTIVE        | PDIP         | N               | 14   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU               | N / A for Pkg Type   | -40 to 85    | MC3303N                 | <a href="#">Samples</a> |
| MC3303PW         | ACTIVE        | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | M3303                   | <a href="#">Samples</a> |
| MC3303PWR        | ACTIVE        | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -40 to 85    | M3303                   | <a href="#">Samples</a> |
| MC3403D          | ACTIVE        | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | MC3403                  | <a href="#">Samples</a> |
| MC3403DR         | ACTIVE        | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | MC3403                  | <a href="#">Samples</a> |
| MC3403N          | ACTIVE        | PDIP         | N               | 14   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU               | N / A for Pkg Type   | 0 to 70      | MC3403N                 | <a href="#">Samples</a> |
| MC3403NE4        | ACTIVE        | PDIP         | N               | 14   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU               | N / A for Pkg Type   | 0 to 70      | MC3403N                 | <a href="#">Samples</a> |
| MC3403NSR        | ACTIVE        | SO           | NS              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | MC3403                  | <a href="#">Samples</a> |
| MC3403PWR        | ACTIVE        | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | M3403                   | <a href="#">Samples</a> |
| MC3403PWRE4      | ACTIVE        | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | 0 to 70      | M3403                   | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of  $\leq 1000$ ppm threshold. Antimony trioxide based flame retardants must also meet the  $\leq 1000$ ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| MC3303DR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| MC3303PWR | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| MC3403DR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| MC3403DR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| MC3403NSR | SO           | NS              | 14   | 2000 | 330.0              | 16.4               | 8.2     | 10.5    | 2.5     | 12.0    | 16.0   | Q1            |
| MC3403PWR | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------|--------------|-----------------|------|------|-------------|------------|-------------|
| MC3303DR  | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| MC3303PWR | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| MC3403DR  | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| MC3403DR  | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| MC3403NSR | SO           | NS              | 14   | 2000 | 367.0       | 367.0      | 38.0        |
| MC3403PWR | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14-PINS SHOWN



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  -  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  -  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE



4211284-2/G 08/15

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



4040049/E 12/2002

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - (C) Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - (D) The 20 pin end lead shoulder width is a vendor option, either half or full width.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2019, Texas Instruments Incorporated

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MC3303N on WIN SOURCE](#)

 [Texas Instruments](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management