



**THE DATASHEET OF
MINISMDC110-2**



Tyco / Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: miniSMDC110

DOCUMENT: SCD 23489
 PCN: 472815
 REV LETTER: H
 REV DATE: JUNE 10, 2002
 PAGE NO.: 1 OF 1

Specification Status:RELEASED

Maximum Electrical Rating

Voltage: 8V_{DC}
Short Circuit Current: 100A

Notes:

1. All terminations are tin/lead plated.
2. Devices can be wave soldered.
3. Drawing not to scale

Marking:

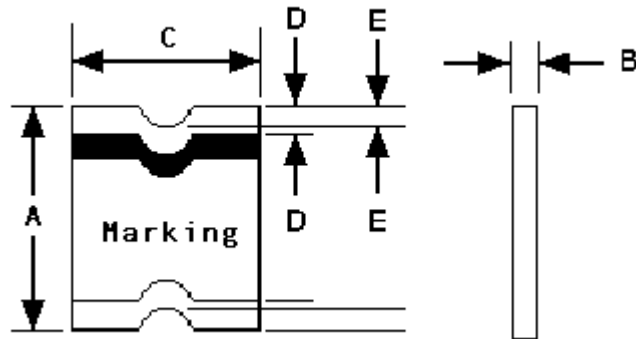
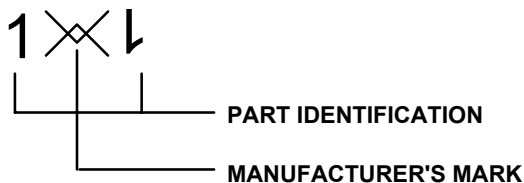


TABLE I. DIMENSIONS:

	A		B		C		D	E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MIN	MAX
mm:	4.37	4.73	0.38	0.62	3.07	3.41	0.30	0.25	0.50
in:	(0.172)	(0.186)	(0.015)	(0.025)	(0.121)	(0.134)	(0.012)	(0.010)	(0.020)

TABLE II. PERFORMANCE RATINGS:

CURRENT RATINGS **			TIME TO TRIP ** @ 8.0A	RESISTANCE VALUES		TRIPPED-STATE POWER DISSIPATION **
AMPERES AT - 40°C HOLD	AMPERES AT 20°C HOLD	AMPERES AT 60°C HOLD	SECONDS AT 20°C MAX	OHMS AT 20°C MIN	OHMS AT 20°C MAX*	WATTS AT 20°C MAX
1.60	1.10	0.71	0.3	0.04	0.21	1.2

* Maximum resistance is measured 1 hour after reflow

** Values Specified were determined using PCB's with 0.030"X1.5 ounce copper traces.

Reference Documents: PS300, E. N. SMD1.0x.
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MINISMDC110-2 on WIN SOURCE](#)
- ⊖ [Littelfuse Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management