



**THE DATASHEET OF  
MM3Z8V2ST1G**



# MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

## Zener Voltage Regulators

### 300 mW SOD-323 Surface Mount Tight Tolerance Portfolio

This series of Zener diodes is packaged in a SOD-323 surface mount package that has a power dissipation of 300 mW. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand-held portables, and high density PC boards.

#### Specification Features

- Standard Zener Breakdown Voltage Range – 3.3 V to 36 V
- Steady State Power Rating of 300 mW
- Small Body Outline Dimensions:  
– 0.067" x 0.049" (1.7 mm x 1.25 mm)
- Low Body Height: 0.035" (0.9 mm)
- Package Weight: 4.507 mg/unit
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- Tight Tolerance  $V_Z$
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant\*

#### Mechanical Characteristics:

**CASE:** Void-free, transfer-molded plastic

**FINISH:** All external surfaces are corrosion resistant

**MAXIMUM CASE TEMPERATURE FOR SOLDERING PURPOSES:**

260°C for 10 Seconds

**LEADS:** Plated with Pb-Sn or Sn only (Pb-Free)

**POLARITY:** Cathode indicated by polarity band

**FLAMMABILITY RATING:** UL 94 V-0

**MOUNTING POSITION:** Any




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)



SOD-323  
CASE 477  
STYLE 1



#### MARKING DIAGRAM



XX = Specific Device Code  
M = Date Code\*  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

#### ORDERING INFORMATION

| Device        | Package              | Shipping†               |
|---------------|----------------------|-------------------------|
| MM3ZxxxST1G   | SOD-323<br>(Pb-Free) | 3,000 /<br>Tape & Reel  |
| SZMM3ZxxxST1G | SOD-323<br>(Pb-Free) | 3,000 /<br>Tape & Reel  |
| MM3ZxxxST3G   | SOD-323<br>(Pb-Free) | 10,000 /<br>Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### DEVICE MARKING INFORMATION

See specific marking information in the device marking column of the Electrical Characteristics table on page 3 of this data sheet.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

### MAXIMUM RATINGS

| Rating   | Symbol          | Max         | Unit                       |
|--|-----------------|-------------|----------------------------|
| Total Device Dissipation FR-4 Board,<br>(Note 1) @ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$           | 300<br>2.4  | mW<br>mW/ $^\circ\text{C}$ |
| Thermal Resistance from Junction-to-Ambient  | $R_{\theta JA}$ | 416         | $^\circ\text{C/W}$         |
| Junction and Storage Temperature Range   | $T_J, T_{stg}$  | -65 to +150 | $^\circ\text{C}$           |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


- FR-4 printed circuit board, single-sided copper, mounting pad  $1\text{ cm}^2$ .

### ELECTRICAL CHARACTERISTICS

( $T_A = 25^\circ\text{C}$  unless otherwise noted,

$V_F = 0.9\text{ V Max.}$  @  $I_F = 10\text{ mA}$  for all types)

| Symbol       | Parameter   |
|--------------|---|
| $V_Z$        | Reverse Zener Voltage @ $I_{ZT}$                    |
| $I_{ZT}$     | Reverse Current                                     |
| $Z_{ZT}$     | Maximum Zener Impedance @ $I_{ZT}$                  |
| $I_{ZK}$     | Reverse Current                                     |
| $Z_{ZK}$     | Maximum Zener Impedance @ $I_{ZK}$                  |
| $I_R$        | Reverse Leakage Current @ $V_R$                     |
| $V_R$        | Reverse Voltage                                     |
| $I_F$        | Forward Current                                     |
| $V_F$        | Forward Voltage @ $I_F$                             |
| $\Theta V_Z$ | Maximum Temperature Coefficient of $V_Z$            |
| C            | Max. Capacitance @ $V_R = 0$ and $f = 1\text{ MHz}$ |

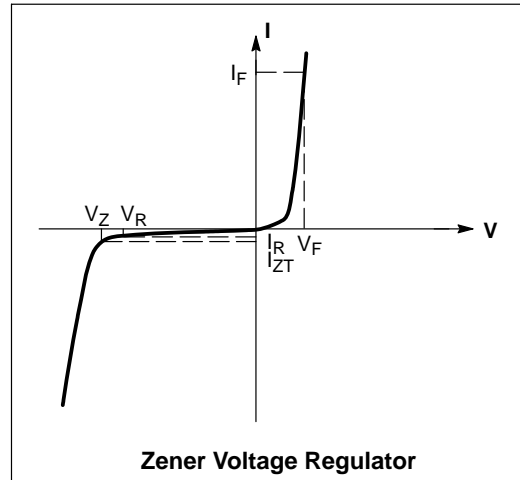

## MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

**ELECTRICAL CHARACTERISTICS** ( $V_F = 0.9$  Max @  $I_F = 10$  mA for all types)

| Device*     | Device Marking | Test Current $I_{zt}$ mA | Zener Voltage VZ |       | $Z_{ZK} I_Z = 0.5$ mA $\Omega$ Max | $Z_{ZT} I_Z = I_{ZT}$ @ 10% Mod $\Omega$ Max | Max IR @ VR |      | $dV_Z/dt$ (mV/k) @ $I_{ZT1} = 5$ mA |      | C pF Max @ $V_R = 0$ f = 1 MHz |
|-------------|----------------|--------------------------|------------------|-------|------------------------------------|--|-------------|------|-------------------------------------|------|--------------------------------|
|             |                |                          | Min              | Max   |                                    |  | $\mu$ A     | V    | Min                                 | Max  |                                |
| MM3Z2V4ST1G | T2             | 5.0                      | 2.29             | 2.51  | 1000                               | 100  | 50          | 1.0  | -3.5                                | 0    | 450                            |
| MM3Z2V7ST1G | T3             | 5.0                      | 2.59             | 2.81  | 1000                               | 100  | 20          | 1.0  | -3.5                                | 0    | 450                            |
| MM3Z3V0ST1G | T4             | 5.0                      | 2.90             | 3.11  | 1000                               | 100  | 10          | 1.0  | -3.5                                | 0    | 450                            |
| MM3Z3V3ST1G | T5             | 5.0                      | 3.32             | 3.53  | 1000                               | 95   | 5.0         | 1.0  | -3.5                                | 0    | 450                            |
| MM3Z3V6ST1G | T6             | 5.0                      | 3.49             | 3.71  | 1000                               | 90   | 5.0         | 1.0  | -3.5                                | 0    | 450                            |
| MM3Z3V9ST1G | T7             | 5.0                      | 3.89             | 4.16  | 1000                               | 90   | 3.0         | 1.0  | -3.5                                | -2.5 | 450                            |
| MM3Z4V3ST1G | T8             | 5.0                      | 4.17             | 4.43  | 1000                               | 90   | 3.0         | 1.0  | -3.5                                | 0    | 450                            |
| MM3Z4V7ST1G | T9             | 5.0                      | 4.55             | 4.75  | 800                                | 80   | 3.0         | 2.0  | -3.5                                | 0.2  | 260                            |
| MM3Z5V1ST1G | TA             | 5.0                      | 4.98             | 5.2   | 500                                | 60   | 2.0         | 2.0  | -2.7                                | 1.2  | 225                            |
| MM3Z5V6ST1G | TC             | 5.0                      | 5.49             | 5.73  | 200                                | 40   | 1.0         | 2.0  | -2.0                                | 2.5  | 200                            |
| MM3Z6V2ST1G | TE             | 5.0                      | 6.06             | 6.33  | 100                                | 10   | 3.0         | 4.0  | 0.4                                 | 3.7  | 185                            |
| MM3Z6V8ST1G | TF             | 5.0                      | 6.65             | 6.93  | 160                                | 15   | 2.0         | 4.0  | 1.2                                 | 4.5  | 155                            |
| MM3Z7V5ST1G | TG             | 5.0                      | 7.28             | 7.6   | 160                                | 15   | 1.0         | 5.0  | 2.5                                 | 5.3  | 140                            |
| MM3Z8V2ST1G | TH             | 5.0                      | 8.02             | 8.36  | 160                                | 15   | 0.7         | 5.0  | 3.2                                 | 6.2  | 135                            |
| MM3Z9V1ST1G | TK             | 5.0                      | 8.85             | 9.23  | 160                                | 15   | 0.5         | 6.0  | 3.8                                 | 7.0  | 130                            |
| MM3Z10VST1G | WB             | 5.0                      | 9.80             | 10.20 | 160                                | 15   | 0.5         | 6.0  | 4.5                                 | 8.0  | 130                            |
| MM3Z11VST1G | WC             | 5.0                      | 10.78            | 11.22 | 160                                | 20   | 0.1         | 8.0  | 5.4                                 | 9.0  | 130                            |
| MM3Z12VST1G | TN             | 5.0                      | 11.74            | 12.24 | 80                                 | 25   | 0.1         | 8.0  | 6.0                                 | 10   | 130                            |
| MM3Z13VST1G | TQ             | 5.0                      | 12.91            | 13.49 | 160                                | 30   | 0.1         | 8.0  | 7.0                                 | 11   | 120                            |
| MM3Z15VST1G | TP             | 5.0                      | 14.34            | 14.98 | 80                                 | 40   | 0.1         | 11   | 8.8                                 | 12.7 | 130                            |
| MM3Z16VST1G | TU             | 5.0                      | 15.85            | 16.51 | 80                                 | 40   | 0.05        | 11.2 | 10.4                                | 14   | 105                            |
| MM3Z18VST1G | TW             | 5.0                      | 17.56            | 18.35 | 80                                 | 45   | 0.05        | 12.6 | 12.4                                | 16   | 100                            |
| MM3Z20VST1G | U8             | 5.0                      | 19.48            | 20.46 | 100                                | 55   | 0.05        | 14.0 | 14.4                                | 18   | 85                             |
| MM3Z22VST1G | WP             | 5.0                      | 21.54            | 22.47 | 100                                | 55   | 0.05        | 15.4 | 16.4                                | 20   | 85                             |
| MM3Z24VST1G | WT             | 5.0                      | 23.72            | 24.78 | 120                                | 70   | 0.05        | 16.8 | 18.4                                | 22   | 80                             |
| MM3Z27VST1G | WQ             | 5.0                      | 26.19            | 27.53 | 300                                | 80   | 0.05        | 18.9 | 21.4                                | 25.3 | 70                             |
| MM3Z30VST1G | WV             | 5.0                      | 29.19            | 30.69 | 300                                | 80   | 0.05        | 21.0 | 24.4                                | 29.4 | 70                             |
| MM3Z33VST1G | WR             | 5.0                      | 32.15            | 33.79 | 300                                | 80   | 0.05        | 23.2 | 27.4                                | 33.4 | 70                             |
| MM3Z36VST1G | WU             | 5.0                      | 35.07            | 36.87 | 500                                | 90   | 0.05        | 25.2 | 30.4                                | 37.4 | 70                             |
| MM3Z39VST1G | WN             | 2.0                      | 38.22            | 39.78 | 500                                | 130  | 0.05        | 27.3 | 33.4                                | 41.2 | 45                             |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

\*Include SZ-prefix devices where applicable.

# MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

## TYPICAL CHARACTERISTICS

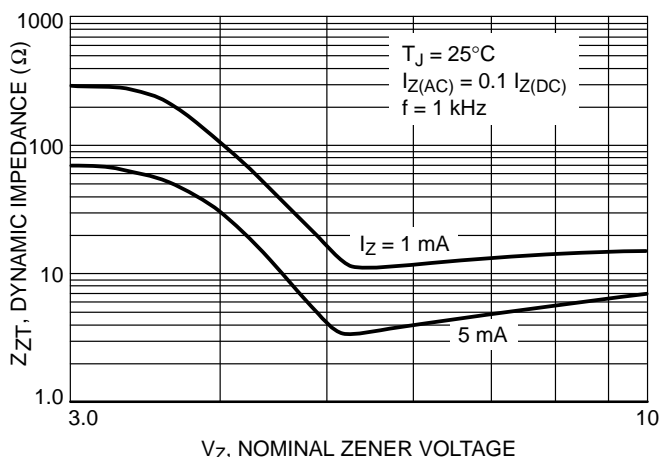


Figure 1. Effect of Zener Voltage on Zener Impedance

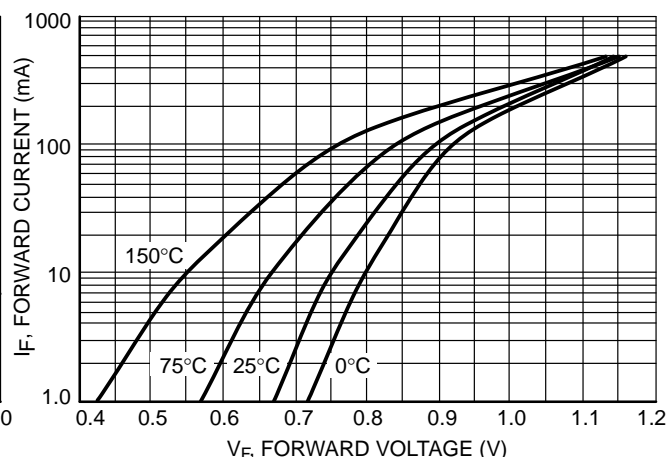


Figure 2. Typical Forward Voltage

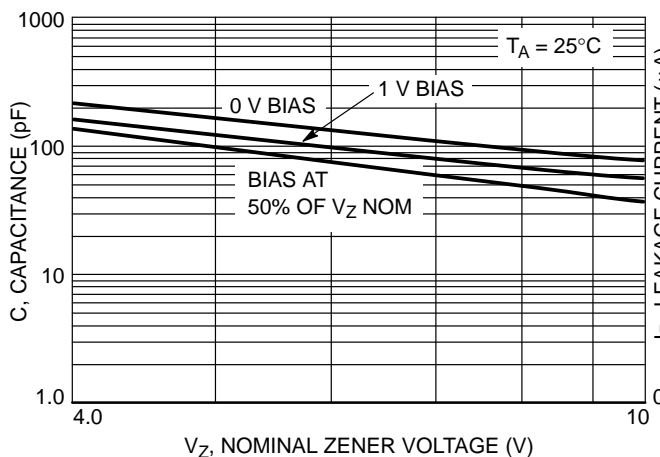


Figure 3. Typical Capacitance

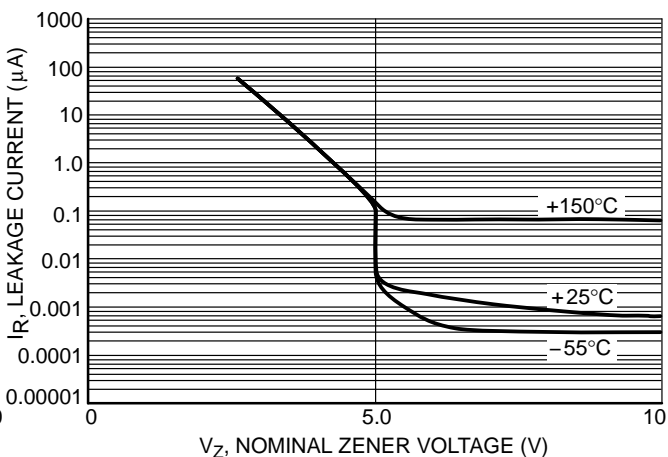


Figure 4. Typical Leakage Current

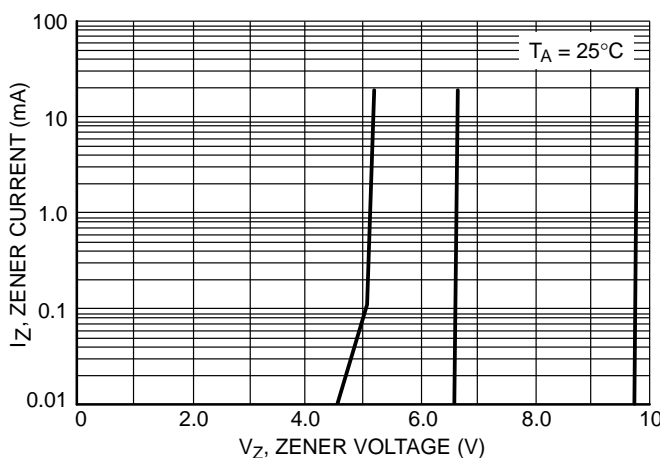


Figure 5. Zener Voltage versus Zener Current ( $V_Z$  Up to 9 V)



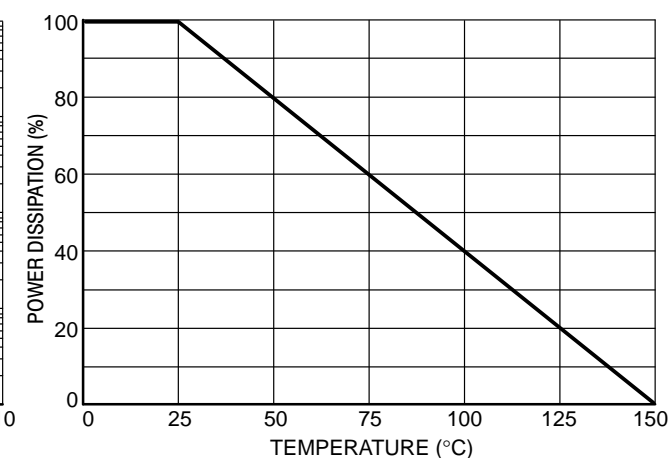


Figure 6. Steady State Power Derating

# MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

## PACKAGE DIMENSIONS

**SOD-323**  
CASE 477-02  
ISSUE H

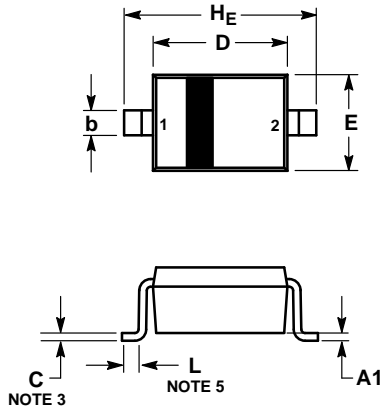


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. LEAD THICKNESS SPECIFIED PER L/F DRAWING WITH SOLDER PLATING.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
5. DIMENSION L IS MEASURED FROM END OF RADIUS.


| DIM | MILLIMETERS |      |       | INCHES    |       |       |
|-----|-------------|------|-------|-----------|-------|-------|
|     | MIN         | NOM  | MAX   | MIN       | NOM   | MAX   |
| A   | 0.80        | 0.90 | 1.00  | 0.031     | 0.035 | 0.040 |
| A1  | 0.00        | 0.05 | 0.10  | 0.000     | 0.002 | 0.004 |
| A3  | 0.15 REF    |      |       | 0.006 REF |       |       |
| b   | 0.25        | 0.32 | 0.4   | 0.010     | 0.012 | 0.016 |
| C   | 0.089       | 0.12 | 0.177 | 0.003     | 0.005 | 0.007 |
| D   | 1.60        | 1.70 | 1.80  | 0.062     | 0.066 | 0.070 |
| E   | 1.15        | 1.25 | 1.35  | 0.045     | 0.049 | 0.053 |
| L   | 0.08        |      |       | 0.003     |       |       |
| HE  | 2.30        | 2.50 | 2.70  | 0.090     | 0.098 | 0.105 |

STYLE 1:  
PIN 1. CATHODE  
2. ANODE

### SOLDERING FOOTPRINT\*

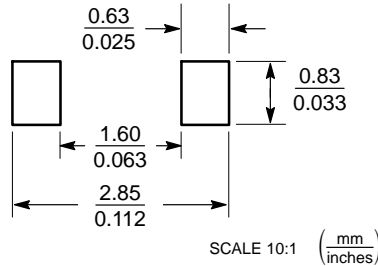

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MM3Z8V2ST1G on WIN SOURCE](#)

 [ON Semiconductor](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management