

DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION


The NJM4558/4559 integrated circuit is a dual high-gain operational amplifier internally compensated and constructed on a single silicon chip using an advanced epitaxial process.

Combining the features of the NJM741 with the close parameter matching and tracking of a dual device on a monolithic chip results in unique performance characteristics. Excellent channel separation allow the use of the dual device in single NJM741 operational amplifier applications providing density. It is especially well suited for applications in differential-in, differential-out as well as in potentiometric amplifiers and where gain and phase matched channels are mandatory.

■ FEATURES

- Operating Voltage ($\pm 4V \sim \pm 18V$)
- High Voltage Gain (100dB typ.)
- High Input Resistance ($5M\Omega$ typ.)
- Bipolar Technology
- Package Outline
 DIP8, DMP8, SIP8
 EMP8 (only NJM4558),
 SSOP8 (only NJM4558)

■ PACKAGE OUTLINE




NJM4558D
NJM4559D



NJM4558M
NJM4559M



NJM4558V




NJM4558L
NJM4559L




NJM4558E

■ PIN CONFIGURATION



NJM4558D, NJM4558M, NJM4558V
NJM4559D, NJM4559M, NJM4558E




NJM4558L
NJM4559L

PIN FUNCTION

- 1.A OUTPUT
- 2.A -INPUT
- 3.A +INPUT
- 4.V⁻
- 5.B +INPUT
- 6.B -INPUT
- 7.B OUTPUT
- 8.V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

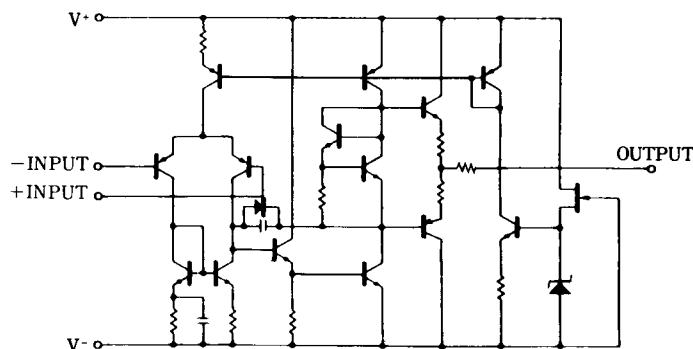

NJM4558/4559

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|-------------------|---|------|
| Supply Voltage | V ⁺ /V | ± 18 | V |
| Differential Input Voltage | V _{ID} | ± 30 | V |
| Input Voltage | V _{IC} | ± 15 (note) | V |
| Power Dissipation | P _D | (DIP8) 500 (DMP8) 300 (EMP8) 300 (SSOP8) 250 (SIP8) 800 | mW |
| Operating Temperature Range | T _{opr} | -40~+85 | °C |
| Storage Temperature Range | T _{stg} | -40~+125 | °C |

(note) For supply voltage less than ±15V, the absolute maximum input voltage is equal to the supply voltage.


■ ELECTRICAL CHARACTERISTICS

(V⁺/V=±15V, Ta=25°C)


| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|------------------|---|------|------|------|-------|
| Input Offset Voltage | V _{IO} | R _S ≤10kΩ | - | 0.5 | 6 | mV |
| Input Offset Current | I _{IO} | | - | 5 | 200 | nA |
| Input Bias Current | I _B | | - | 25 | 500 | nA |
| Input Resistance | R _{IN} | | 0.3 | 5 | - | MΩ |
| Large Signal Voltage Gain | A _V | R _L ≥2kΩ, V _O =±10V | 86 | 100 | - | dB |
| Maximum Output Voltage Swing 1 | V _{OM1} | R _L ≥10kΩ | ± 12 | ± 14 | - | V |
| Maximum Output Voltage Swing 2 | V _{OM2} | R _L ≥2kΩ | ± 10 | ± 13 | - | V |
| Input Common Mode Voltage Range | V _{ICM} | | ± 12 | 14 | - | V |
| Common Mode Rejection Ratio | CMR | R _S ≤10kΩ | 70 | 90 | - | dB |
| Supply Voltage Rejection Ratio | SVR | R _S ≤10kΩ | 76.5 | 90 | - | dB |
| Operating Current | I _{CC} | | - | 3.5 | 5.7 | mA |
| Slew Rate | | | | | | |
| | NJM4558 | SR | - | 1 | - | V/μs |
| | NJM4559 | SR | - | 2 | - | V/μs |
| Equivalent Input Noise Voltage | V _{NI} | RIAA, R _S =2.2kΩ, 30kHz LPF | - | 1.4 | - | μVrms |
| Gain Bandwidth Product | GB | | | | | |
| | NJM4558 | | | 3 | | MHz |
| | NJM4559 | | | 6 | | MHz |

■ TYPICAL CHARACTERISTICS


Open Loop Voltage Gain vs. Frequency

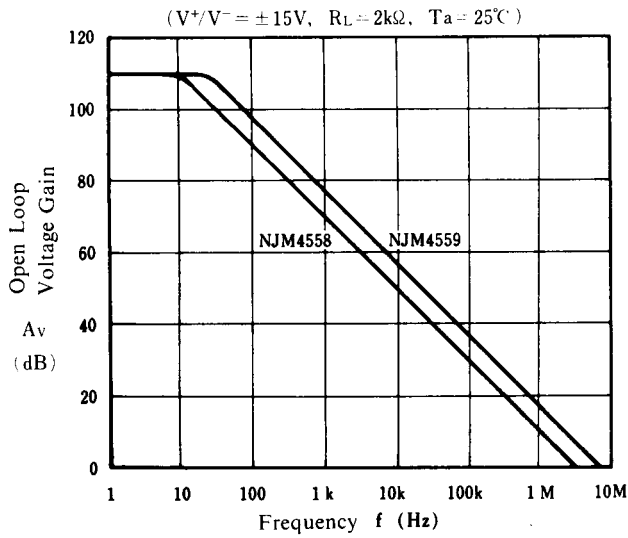


Maximum Output Voltage Swing vs. Frequency

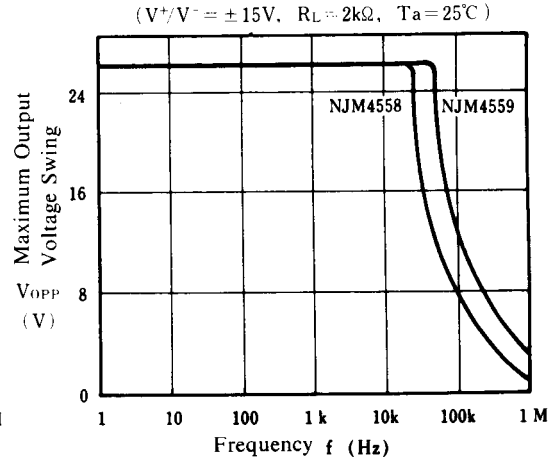


Maximum Output Voltage Swing vs. Load Resistance

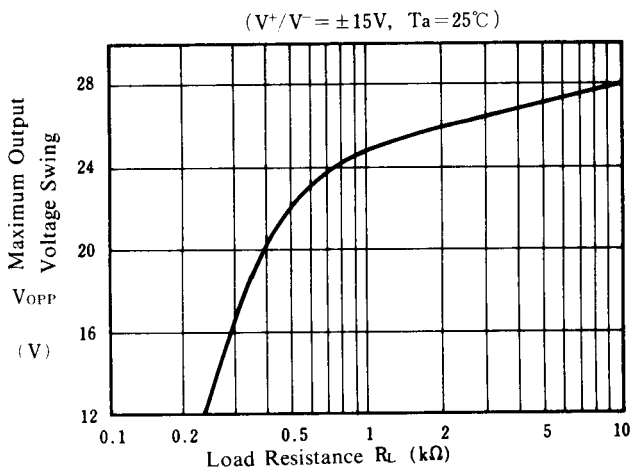


Equivalent Input Noise Voltage vs. Frequency

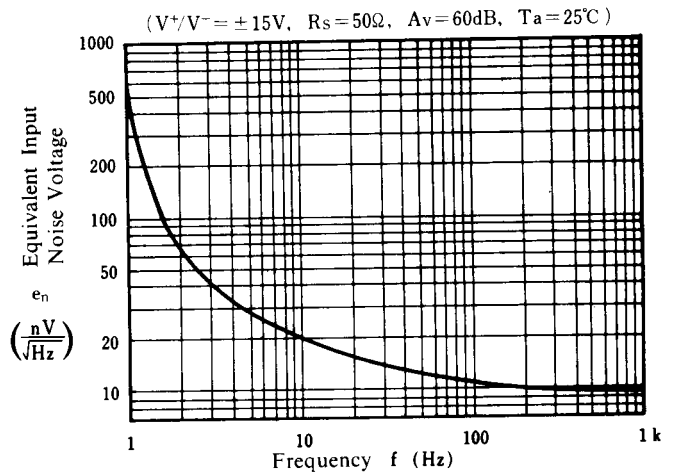

Operating Current vs. Temperature

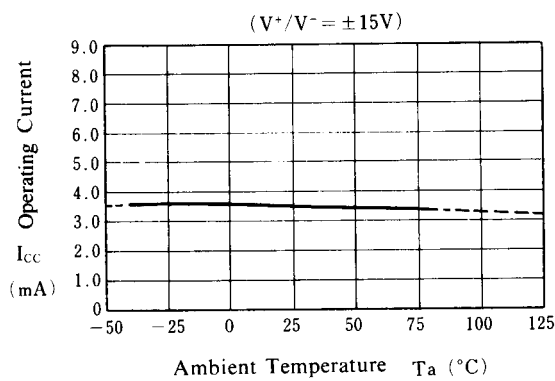


Maximum Output Voltage Swing vs. Temperature

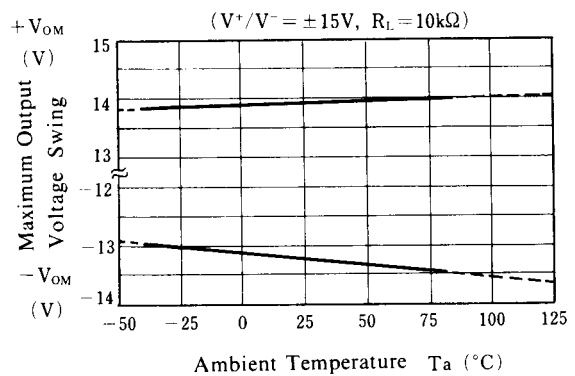


■ TYPICAL CHARACTERISTICS


Input Offset Voltage vs. Temperature

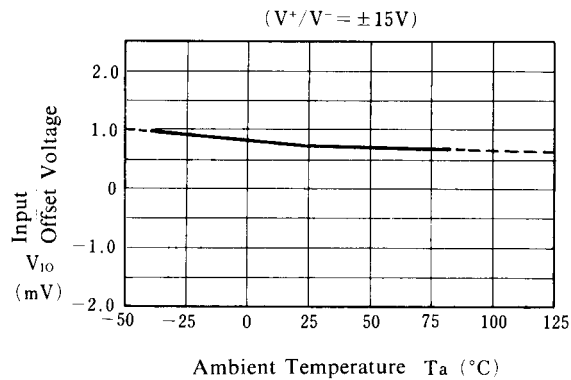


Input Bias Current vs. Temperature

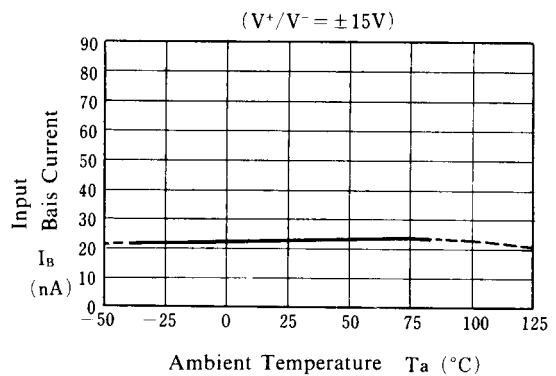

Maximum Output Voltage Swing vs. Operating Voltage

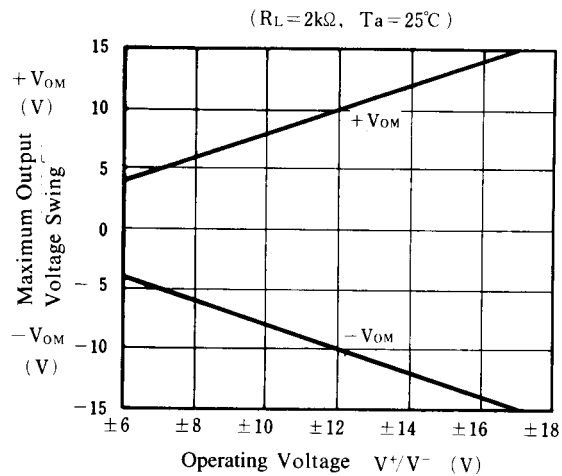

Operating Current vs. Operating Voltage

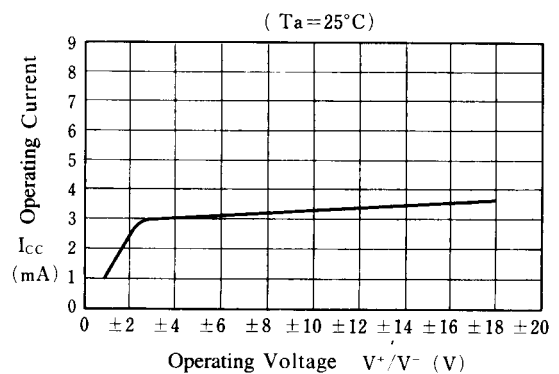



[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View NJM4558AV on WIN SOURCE](#)
-  [NJR Corporation/NJRC Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management