


TECHNICAL DATA


30989

CYLINDRICAL HELIUM-NEON LASER SYSTEM

Wavelength	633 nm
Minimum Output Power	2.0 mW
Power 3 Seconds After Turn-On	> 75%
Polarization	Linear > 500 :1
Mode Structure	TEM ₀₀ > 99%
Beam Diameter	0.81 mm
Beam Divergence	1.00 mrad
Longitudinal Mode Spacing	566 MHz
Beam Drift After 20 Minute Warm-Up	< 0.2 mrad
Long Term Beam Drift	< 0.05 mrad
Noise (30 Hz - 10 MHz)	< 1% rms
Starting Voltage	< 10 kVDC
Operating Voltage	1800 VDC
Series Resistors in Housing	94 KΩ
Operating Current	5.25 mA
Shock	15 g for 11 msec
Laser Head Weight	600 grams
Dimensions	
Length	330.2±1.0 mm (13.00±0.04")
Diameter	44.5±0.5 mm (1.75±0.02")
Maximum Output Power	5.0 mW
CRDH/CE Classification	IIIa/3R
Recommended Power Supply	39783
Replacement Laser Head	30621

ENVIRONMENTAL SPECIFICATIONS

	<u>Operating</u>	<u>Non-Operating</u>	
Temperature	-20 - +70° C	-40 - +80° C	
Humidity	≤ 80%	≤ 95%	
Altitude	0-3,000 meters	0-6,000 meters	

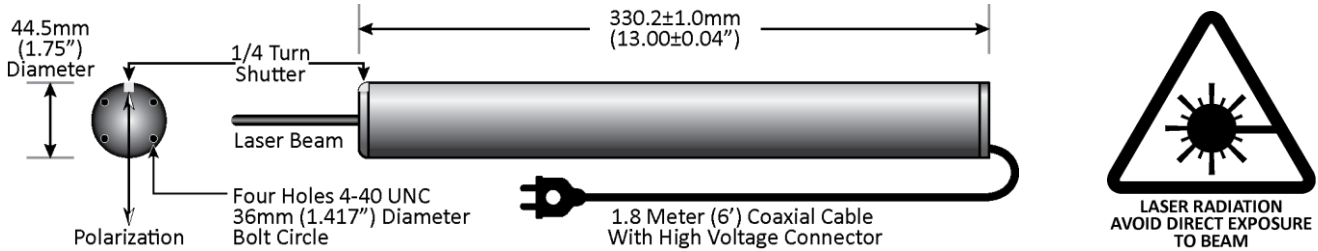



5505 Airport Boulevard Boulder, Colorado 80301

Phone - (303) 938-1960 Fax - (303) 447-3279

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 30621 on WIN SOURCE](#)
-  [Excelitas Technologies Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management