



**THE DATASHEET OF
OMIH-SH-112L,394**



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

© COPYRIGHT - BY -

LOC HB

DIST -

P LTR

D CHANGE LO






E REVISE ONLY

2

3

4

DOT MARK: PURPLE

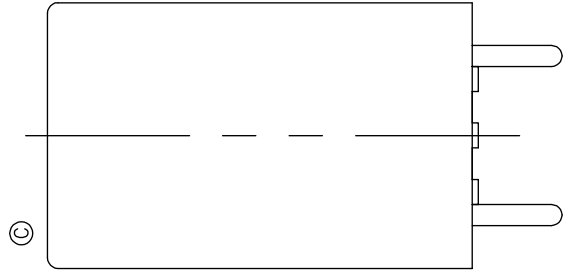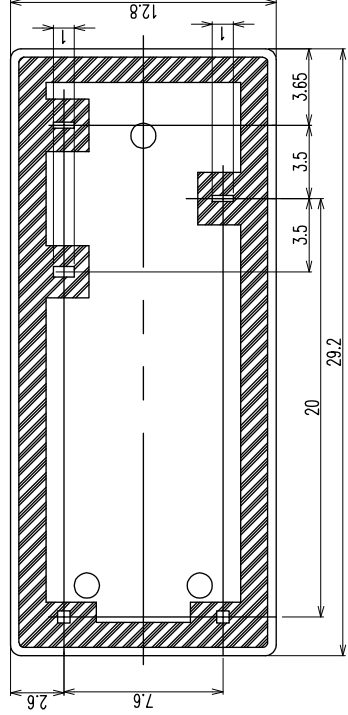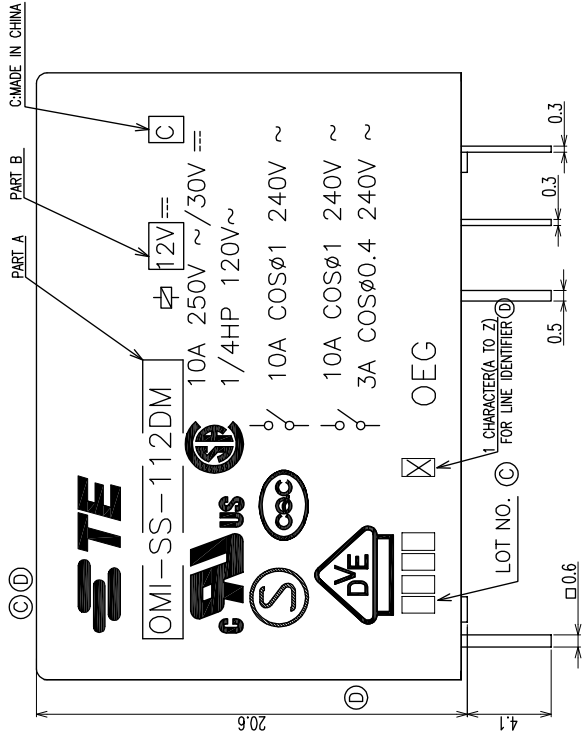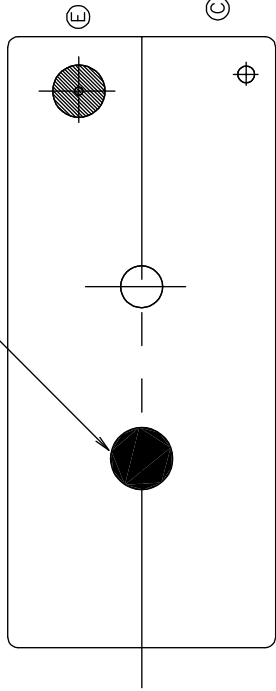


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:
		0 PLC ± -
		1 PLC ± -
		2 PLC ± -
		3 PLC ± -
4 PLCS ± -		
MATERIAL	FINISH	WEIGHT
		± -

DMN	H.SASAKI
CHK	Y.OIKAWA
APVD	A.NAGAI
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	
CUSTOMER DRAWING	

NOTES:

- 1.-SH-: WASHABLE TYPE
- 2.LOT NO. SYSTEM AS FOLLOWING:



3.GENERAL TOLERANCE AS FOLLOWING:

TOLERANCE
0~0.99mm ±0.1
1mm~2.99mm ±0.2
3mm MIN. ±0.3

- ④ 4.FOR THE TIN-PLATING OF THE PINS:
 +0.1mm FOR WIDTH,THICKNESS AND DIAMETER.
 +0.5mm FOR LENGTH.

1-1461300-5	OMI-SH-1240,394	OMI-SH-1240	24V
1461300-2	OMI-SH-1480,394	OMI-SH-1480	48V
1461300-1	OMI-SH-148L,394	OMI-SH-148L	48V
4-1440000-3	OMI-SH-124L,394	OMI-SH-124L	24V
4-1440000-0	OMI-SH-112L,394	OMI-SH-112L	12V
3-1440000-8	OMI-SH-1120,394	OMI-SH-1120	12V
TE PART NO	EC TYPE NAME	PART A	PART B

RELAY TYPE

INCOMBUSTI

DWG H.SASAKI

CHK Y.OIKAWA

APVD A.NAGAI

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

THIS DRAWING IS A CONTROLLED DOCUMENT.

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PLC	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0	± --
1	± --
2	± --
3	± --
4	± --
APPLICABLE	± --
FINISH	± --

DIMENSIONS: mm





MATERIAL

CUSTOMER DRAWING

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View OMIH-SH-112L,394 on WIN SOURCE](#)
-  [TE Connectivity Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management