



**THE DATASHEET OF
OMI-SS-124L,300**



3


2

1


ION
ERIVED.

Loc HB DIST -



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		CHANGE LOCK VENT HOLE, ADD OCC. LINE IDENTIFIER AND PLATING THICKNESS ECO-12-005725	21-AUG-12	D.L	BH.Y

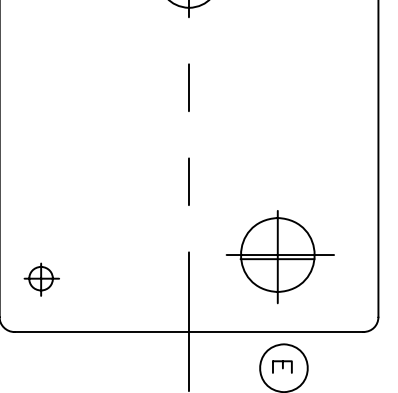


PART A PART B C:MADE IN CHINA

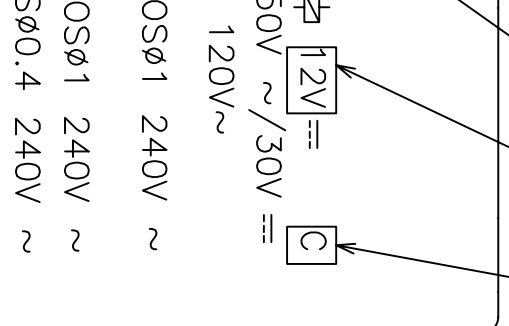

12V ~
30V ~ /30V ~
120V ~
OSØ1 240V ~
OSØ1 240V ~
SØ0.4 240V ~

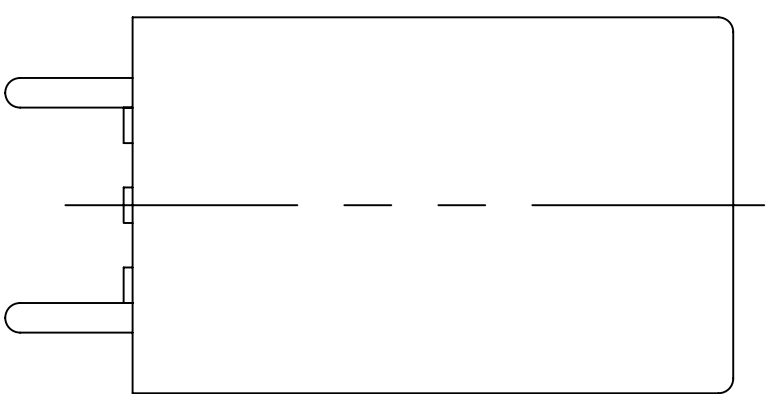


NOTES:
1.-SS-: PLASTIC SEALED TYPE
2.LOT NO. SYSTEM AS FOLLOWING:



3.GENERAL TOLERANCE AS FOLLOWING:

TOLERANCE	
0~0.99mm	±0.1
1mm~2.99mm	±0.2
3mmMIN.	±0.3

(E) 4.TERMINAL DIMENSION IS NOT INCLUDING SOLDER TIP.
FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH, THICKNESS AND DIAMETER.
+0.5mm FOR LENGTH.

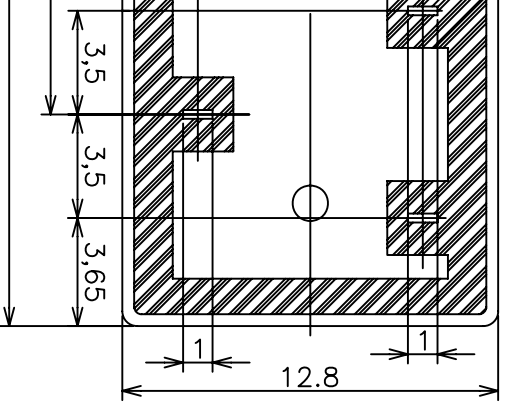

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H SASAKI		NAME	
CHK Y. OIKAWA		OMI -SS-D/L CUSTOMER DRAWING	
APVD A.NAGAI		SIZE A3	RESTRICTED TO
PRODUCT SPEC		CAGE CODE 00779	
APPLICATION SPEC		DRAWING NO. C=4-1440000-6	
WEIGHT		SCALE 4:1	
MATERIAL		SHEET 1	REV E
		OF 2	



TE Connectivity

A

B

C

D


ION	REVISED.	Loc	DIST	REVISIONS					
		HB	-	P	LTR	DESCRIPTION	DATE	DWN	APVD

3

2

1

DRILLING DIAGRAM(2/1)
(BOTTOM VIEW)

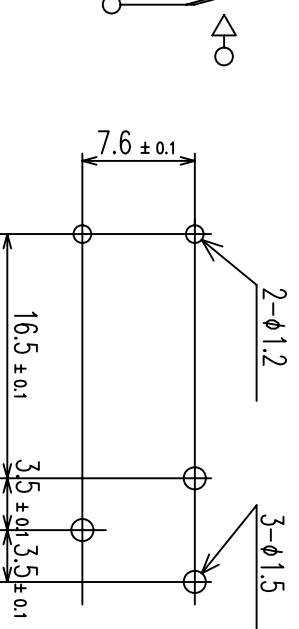

0MI-SS-109D	0MI-SS-109D	9V
0MI-SS-148L	0MI-SS-148L	48V
0MI-SS-148D	0MI-SS-148D	48V
0MI-SS-136D	0MI-SS-136D	36V
0MI-SS-124L	0MI-SS-124L	24V
0MI-SS-124D	0MI-SS-124D	24V
0MI-SS-112L	0MI-SS-112L	12V
0MI-SS-112D	0MI-SS-112D	12V
0MI-SS-109L	0MI-SS-109L	9V
0MI-SS-106L	0MI-SS-106L	6V
0MI-SS-106D	0MI-SS-106D	6V
0MI-SS-105L	0MI-SS-105L	5V
0MI-SS-105D	0MI-SS-105D	5V
EC TYPE NAME	PART A	PART B

LAYER TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	±

UL94 V-0	EPOXY RESIN	RESIN	17
CLASS E	PBT	CASE	16
UL94 V-0	UL94 V-0	TAPE	15
UL94 V-0	PET	MAGNETIC WIRE	14
UL94 V-0	PBT	BASE	13
UL94 V-0	PBT	BOBBIN	12
UL94 V-0	CP WIRE	COIL TERMINAL	11
UL94 V-0	PPS	CARD	10
UL94 V-0	Ag ALLOY	MOVABLE CONTACT	9
UL94 V-0	Ag ALLOY	STATIONARY CONTACT	8
UL94 V-0	Cu ALLOY	HINGE SPRING	7
UL94 V-0	Cu ALLOY	B TERMINAL	6
UL94 V-0	Cu ALLOY	M TERMINAL	5
UL94 V-0	Cu ALLOY	MOVABLE SPRING	4
UL94 V-0	STEEL	CORE	3
UL94 V-0	STEEL	ARMATURE	2
UL94 V-0	STEEL	YOKE	1

STE TE Connectivity

OMI-SS-D/L CUSTOMER DRAWING

DWN	H.SASAKI	NAME	OMI-SS-D/L CUSTOMER DRAWING			RESTRICTED TO
CHK	Y.OIKAWA	APVD	A.3	00779	C4-1440000-6	
	A.NAGAI	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO	SCALE
		APPLICATION SPEC	A3	00779	C4-1440000-6	4:1
		WEIGHT				SHEET
						2 OF 2
						REV
						E

CUSTOMER DRAWING

A

B

C

D

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

[View OMI-SS-124L,300 on WIN SOURCE](#)

[TE Connectivity Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management