



**THE DATASHEET OF
OSTTA034163**



Technical data

1. Nominal voltage
PITCH: 5.08mm
2. Connection cable
AWG 26-14
3. Insulation With
AC 1600V/MIN
4. Insulation Resistance
1000MΩ or more
5. Tightening torque
4.0kgf.cm (0.4N.m)
6. Screw thread
M3
7. Stripping length
5.0mm
8. Operating temperature
-40 to 125°C
9. Undimensions

Dim.L=P×5.08
 Dim.B=(P-1)×5.08
 P= number of poles

0-30mm
 over 30mm-60mm
 over 60mm-90mm
 over 90mm

10. Safety approval
11. RoHS Compliance







Part No.:

OSTTAXX

No. of
 02 2
 03 3

 24 2

Nonstainless steel
 Minus cc

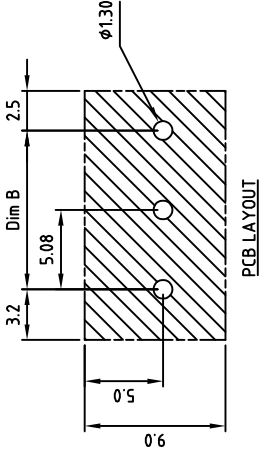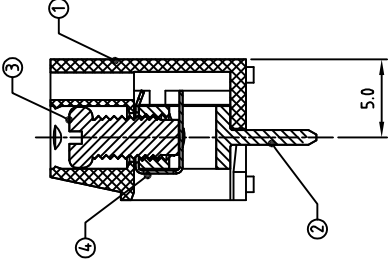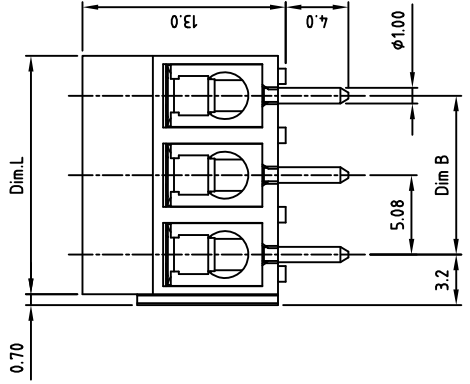

4	WIRE GUARD	Stainless steel
3	SCREW	STEEL
2	CAGE	BRASS
1	BODY	PA66 UL94V-0
ITEM NAME OF PART		MATERIAL
DWG.	WF. Zhang	DATE 2016.04.02
CHK.	WF. Zhang	DATE 2016.06.12
APP.		DATE





ON-SHORE TECHNOLOGY, INC.

△	SIGN	DESCRIPTION	CHK.	DATE
---	------	-------------	------	------

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View OSTTA034163 on WIN SOURCE](#)
-  [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management