




**THE DATASHEET OF  
P502-025**



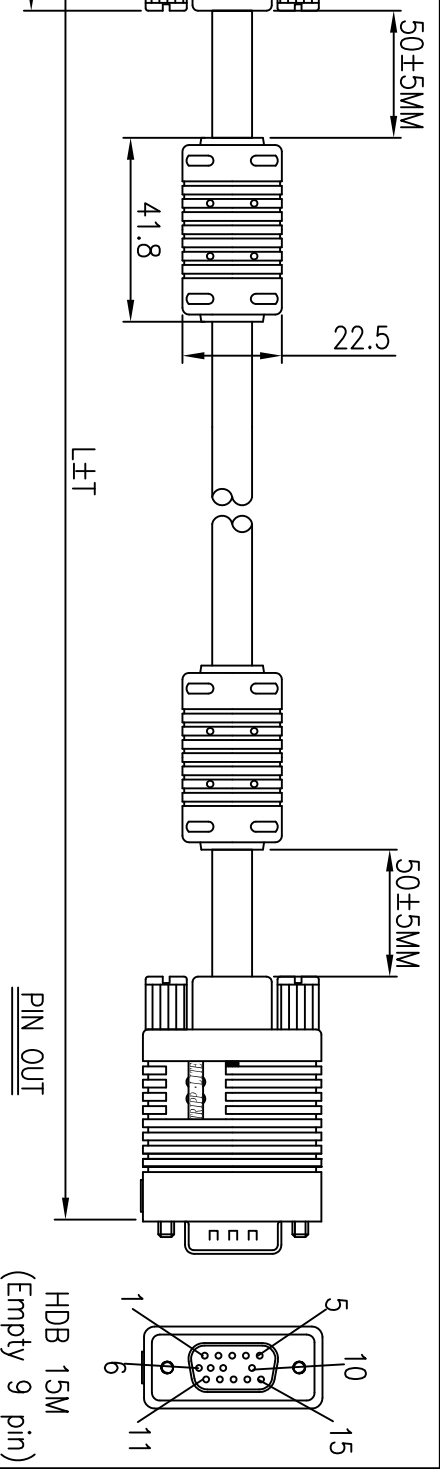

\*3C+(30AWG\*4C)+(30AWG\*2PAIRS)]AL-FOIL AND WIRE(BARE COPPER), BLACK PVC VW-1&CM JACKET,

SUB 15PIN MALE: SOLDER TYPE, AND GOLD SHELL,PBT BLACK.

REMOULD AND 360° SOLDER TO CONNECTOR

OHM INSULATION RESISTANCE.  
EACH FOR UP AND DOWN ONE TIME.  
V,100M OHM


- P1 1 — 1 } P2 1
  - 6 — 6 } RED
  - 2 — 2 } GREEN
  - 7 — 7 } GREEN
  - 3 — 3 } BLUE
  - 8 — 8 } BLUE
  - 4 — 4 } BLACK
  - 5 — 5 } BROWN
  - 11 — 11 } YELLOW
  - 12 — 12 } PURPLE
  - 10 — 10 } ORANGE
  - 13 — 13 } ORANGE/BLACK
  - 14 — 14 } BLUE
  - 15 — 15 } BLUE/WHITE
- SHELL — SHELL(DRAIN + BRAID)

D	Increase Wire Fire Rating	11/09/15
C	ADD THE LENGTH	11/03/14
B	ADD THE P/N P502-020,P502-040	10/20/14
A	INITIAL RELEASE	06/02/12
REV	DESCRIPTION OF CHANGE	DATE

TOLERANCE		M/M	
INCHES			
X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	





DRAWN BY	Lulu	SHEET	1/2	DWG NO.	
CHECK BY		UNIT	MM	REV	D
APPD BY		SCALE	NONE	DATE	11/09/15



TITLE	HD15M TO HD15M
PART NO.	P502-XXX

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View P502-025 on WIN SOURCE](#)
-  [Tripp Lite Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management