



**THE DATASHEET OF
3600BP14M0600T**

High Frequency Ceramic Solutions

3.3 - 3.7 GHz WiMAX BPF

P/N 3600BP14M0600

Detail Specification: 1/18/2019


Page 1 of 3

General Specifications

Part Number	3600BP14M0600	Input Power	500 mW max.
Frequency (MHz)	3300 - 3700	Impedance	50 Ω
Insertion Loss	1.8 max @ 25 dB	Operating Temperature	-40 to +105°C
	2.0 max @ -40 ~ 85 dB	Storage Temperature	-40 to +105°C
Return Loss	12 dB min.	Reel Quantity	4000
Attenuation (dB)	30min. @ 806 ~ 915MHz	MSL	1
Attenuation (dB)	30min. @ 1710 ~ 1785MHz	* - 1 yr shelf life in bag; 1 week shelf life out of bag; Vacuum reseal unused reel	
Attenuation (dB)	30min. @ 1850 ~ 1910MHz		
Attenuation (dB)	30min. @ 1920 ~ 1980MHz		
Attenuation (dB)	30min. @ 2400 ~ 2500MHz		
Attenuation (dB)	31min. @ 2400 ~ 2500MHz		
Attenuation (dB)	18min. @ 4900 ~ 5900MHz		


Mechanical Dimensions

	In	mm
L	0.063 ± 0.004	1.60 ± 0.10
W	0.031 ± 0.004	0.80 ± 0.10
T	0.022 ± 0.004	0.55 ± 0.10
a	0.028 ± 0.006	0.70 ± 0.15
b	0.012 ± 0.004	0.30 ± 0.10
c	0.006 ± 0.004	0.15 ± 0.10
g	0.018 ± 0.006	0.45 ± 0.15

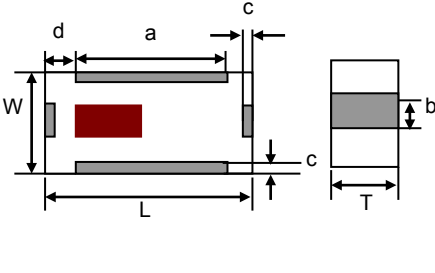

Terminal Configuration

No.	Function
1	GND
2	I/O
3	GND
4	I/O

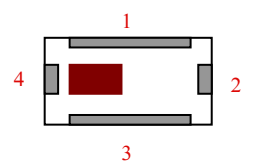


Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 Ω impedance matching characteristics.

Units: mm

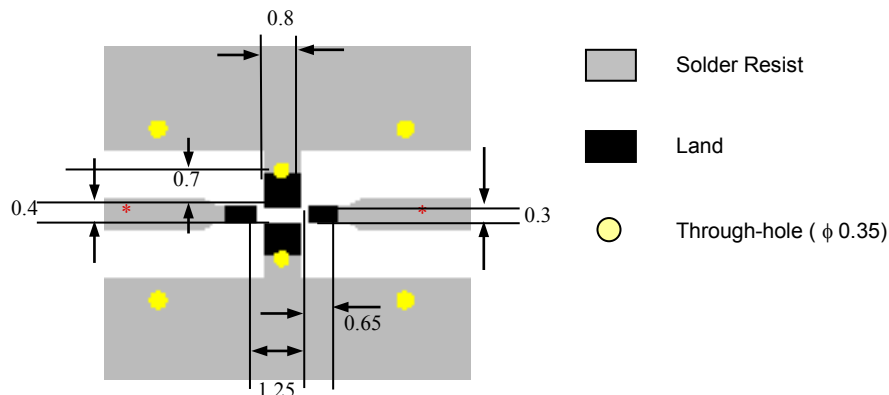

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


3.3 - 3.7 GHz WiMAX BPF

P/N 3600BP14M0600


Detail Specification: 1/18/2019

Page 2 of 3

Typical Electrical Performance (T=25°C)

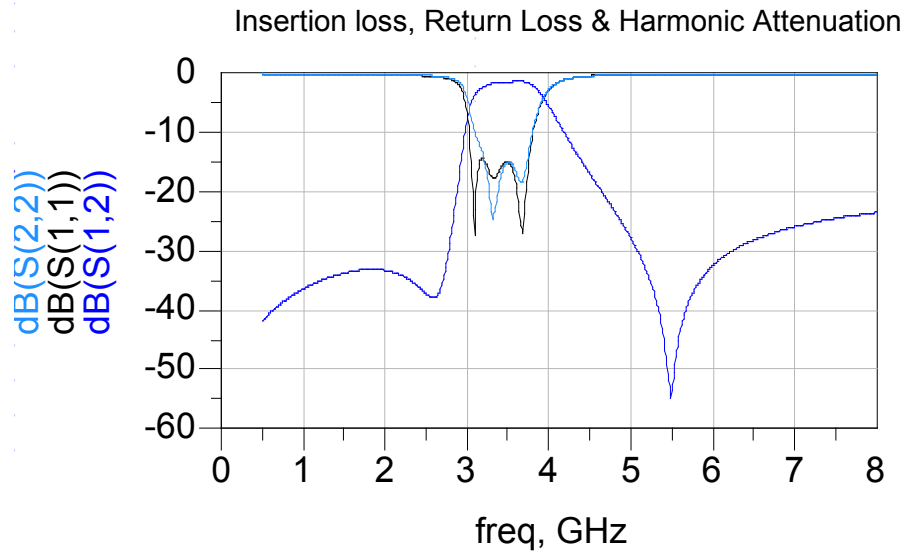

Measurement Diagram

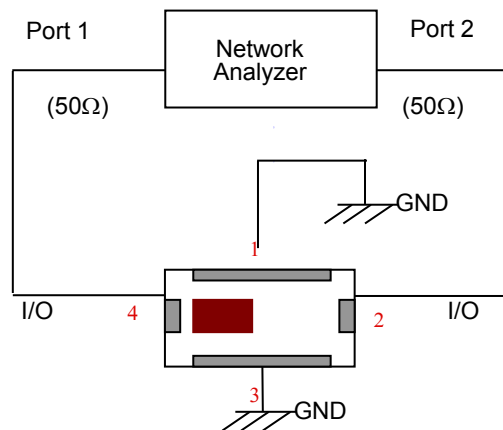

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions

3.3 - 3.7 GHz WiMAX BPF

P/N 3600BP14M0600

Detail Specification: 1/18/2019

Page 3 of 3

Application Notes, Layout Files, and more

<https://www.johansontechnology.com/band-pass-filters>

Packaging information

<https://www.johansontechnology.com/tape-reel-packaging>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

MSL Info

<https://www.johansontechnology.com/msl-rating>

Recommended Storage Condition and Max Shelf Life

<https://www.johansontechnology.com/recommended-storage-conditions>

RoHS Compliance

<https://www.johansontechnology.com/rohs-compliance>

Antenna layout and tuning techniques

<https://www.johansontechnology.com/tuning>

Antenna layout review, tuning, and characterization services

<https://www.johansontechnology.com/ipc-antenna-services>

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.





4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 1.1

www.johansontechnology.com

2019 Johanson Technology, Inc. All Rights Reserved

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 3600BP14M0600T on WIN SOURCE](#)
-  [Johanson Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management