



**Description**

- Low resistance
- Low profile 0603/1608 design
- Pb-free and RoHS Compliant
- High inrush withstand capability
- Polymer matrix design
- One time positive disconnect
- Ampere rating marked on both sides, dual orientation
- Compatible with leaded and lead-free reflow and wave solder

ELECTRICAL CHARACTERISTICS	
% of Amp Rating	Opening Time
100%	4 Hours Minimum
200%	5 Seconds Maximum

**Agency Information**

- UL Recognition Card: JDYX2, E19180

**Environmental Data**


- Life Test: MIL-STD-202, Method 108A, Test Condition C
- Load Humidity: MIL-STD-202, Method 103B
- Moisture Resistance: MIL-STD-202, Method 106G
- Thermal Shock: MIL-STD-202, Method 107D
- Solderability: ANSI/J-STD-002, Test B
- Mechanical Shock: MIL-STD-202, Method 213B, Condition A
- High Frequency Vibration: MIL-STD-202, Method 204D, Condition D

**Packaging & Ordering Information**


- 5,000 pieces; paper tape; 178mm (7 inch) reel; per EIA Standard 481-1
- Order by Product Code (no prefix or suffix necessary)



**Dimensions** mm/(inches)

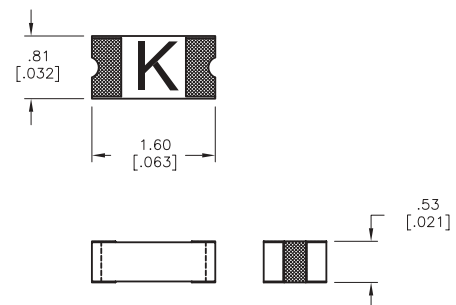

**Land Pattern**

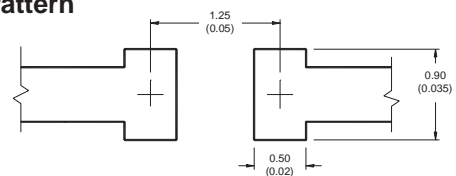

**Soldering Method**

- Wave Solder: 260°C, 10 sec max.
- Infrared: 260°C, 30 sec max.


SPECIFICATIONS					
Product Code	Voltage Rating AC/DC	Interrupting Rating @ Rated Voltage*	Typical DC Cold Resistance (ohms)**	Typical Melting Pt (A²s)***	Alpha Code
PC06F500MA	32V	50A	0.143	0.00128	F
PC06F750MA	32V	50A	0.088	0.00291	G
PC06F1A	32V	50A	0.065	0.00616	H
PC06F1.5A	32V	50A	0.042	0.02565	K
PC06F2A	32V	50A	0.027	0.03968	N
PC06F2.5A	32V	50A	0.021	0.10139	O
PC06F3A	32V	50A	0.018	0.15778	P
PC06F3.5A	32V	50A	0.014	0.25844	R
PC06F4A	32V	50A	0.012	0.27034	S

\* DC Interrupting Rating is measured at designated voltage, time constant of less than 50 microseconds, battery source.

\*\* DC cold resistance is measured at less than 10% of rated current.

\*\*\* Melting Pt is measured with a battery back at rated DC voltage, at the lesser of either 10 times rated current or the interrupting rating with a time constant of less than 50 microseconds.

**TIME CURRENT CURVE**

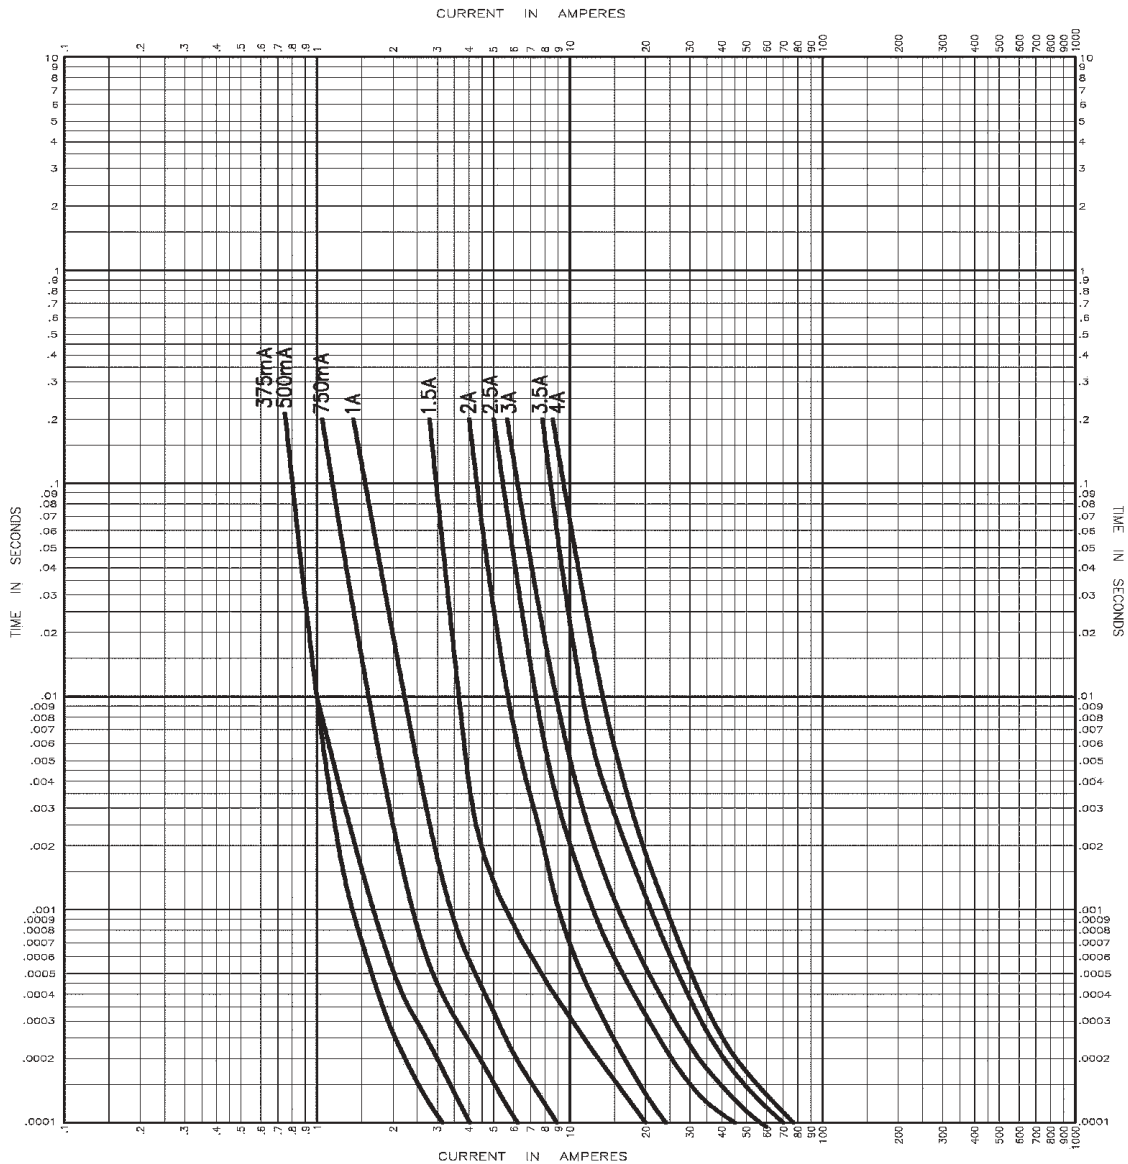

**North America**

Cooper Electronic Technologies  
3601 Quantum Boulevard  
Boynton Beach, FL 33426-8638  
Tel: 1-561-752-5000  
Fax: 1-561-742-0134  
Toll Free: 1-888-414-2645

Cooper Bussmann  
P.O. Box 14460  
St. Louis, MO 63178-4460  
Tel: 1-636-394-2877  
Fax: 1-800-544-2570

**Europe**

Cooper Electronic Technologies  
Cooper (UK) Limited  
Burton-on-the-Wolds  
Leicestershire • LE12 5TH UK  
Tel: +44 (0) 1509 882 737  
Fax: +44 (0) 1509 882 786

**Asia Pacific**

Cooper Electronic Technologies  
1 Jalan Kilang Timor  
#06-01 Pacific Tech Centre  
Singapore 159303  
Tel: +65 278 6151  
Fax: +65 270 4160

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PC06F4A on WIN SOURCE](#)

 [Eaton Bussmann Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management