





**THE DATASHEET OF  
3KP58A-B**



### 3KP Series

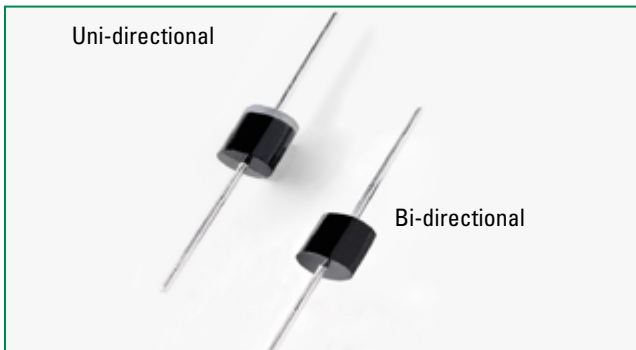

#### Agency Approvals

| AGENCY  | AGENCY FILE NUMBER |
|---|--------------------|
|  | E230531            |


#### Maximum Ratings and Thermal Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

| Parameter  | Symbol                            | Value      | Unit |
|--|-----------------------------------|------------|------|
| Peak Pulse Power Dissipation by 10/1000µs Test Waveform (Fig.2) (Note 1), (Note 4)   | P <sub>PPM</sub>                  | 3000       | W    |
| Steady State Power Dissipation on Infinite Heat Sink at T <sub>L</sub> =75°C         | P <sub>D</sub>                    | 7.0        | W    |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave Unidirectional Only (Note 2) | I <sub>FSM</sub>                  | 300        | A    |
| Maximum Instantaneous Forward Voltage at 100A for Unidirectional Only (Note 3)       | V <sub>F</sub>                    | 3.5/5.0    | V    |
| Operating Junction and Storage Temperature Range                                     | T <sub>J</sub> , T <sub>STG</sub> | -55 to 175 | °C   |
| Typical Thermal Resistance Junction to Lead  | R <sub>θJL</sub>                  | 8.0        | °C/W |
| Typical Thermal Resistance Junction to Ambient                                       | R <sub>θJA</sub>                  | 40         | °C/W |

#### Notes:

1. Non-repetitive current pulse, per Fig. 4 and derated above T<sub>J</sub> (initial) =25°C per Fig. 3.
2. Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 per minute maximum.
3. V<sub>F</sub> < 3.5V for single die parts and V<sub>F</sub> < 5.0V for stacked-die parts.
4. The P<sub>PPM</sub> of stacked-die parts is 4kW and please contact littelfuse for the detail stacked-die parts.

#### Functional Diagram

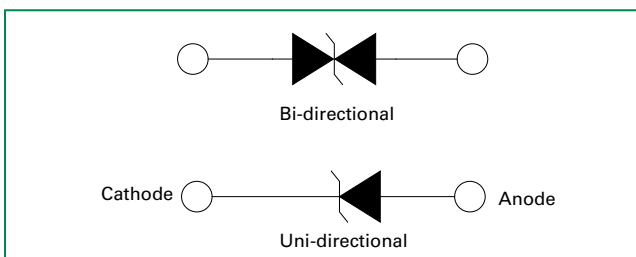

#### Description

The 3KP Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

#### Features

- 3000W peak pulse capability at 10/1000µs waveform, repetition rate (duty cycles):0.01 %
- Glass passivated chip junction in P600 package
- Fast response time: typically less than 1.0ps from 0 Volts to BV min
- Excellent clamping capability
- Typical failure mode is short from over-specified voltage or current
- Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c
- IEC-61000-4-2 ESD 30kV(Air), 30kV (Contact)
- ESD protection of data lines in accordance with IEC 61000-4-2
- EFT protection of data lines in accordance with IEC 61000-4-4
- Low incremental surge resistance
- Typical I<sub>R</sub> less than 2µA when V<sub>BR</sub> min>12V
- High temperature to reflow soldering guaranteed: 260°C/40sec / 0.375"; (9.5mm) lead length, 5 lbs., (2.3kg) tension
- V<sub>BR</sub> @T<sub>J</sub> = V<sub>BR</sub> @25°C x (1 + αT x (T<sub>J</sub> - 25)) (α T: Temperature Coefficient, typical value is 0.1%)
- Plastic package is flammability rated V-0 per Underwriters Laboratories
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)

#### Applications

TVS devices are ideal for the protection of I/O interfaces, V<sub>CC</sub> bus and other vulnerable circuits used in telecom, computer, industrial and consumer electronic applications.

#### Additional Information



Datasheet



Resources



Samples

# Transient Voltage Suppression Diodes

Axial Leaded – 3000W > 3KP series



## Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Reverse Stand off Voltage $V_R$ (Volts) | Breakdown Voltage $V_{BR}$ (Volts) @ $I_T$ |        | Test Current $I_T$ (mA) | Maximum Clamping Voltage $V_C$ @ $I_{PP}$ (V) | Maximum Peak Pulse Current $I_{PP}$ (A) | Maximum Reverse Leakage $I_R$ @ $V_R$ ( $\mu\text{A}$ ) | Agency Approval  |
|-------------------|------------------|---|--|--------|-------------------------|---|---|---|---|
|                   |                  |   | MIN  | MAX    |                         |   |   |   |   |
| 3KP5.0A           | 3KP5.0CA         | 5.0                                     | 6.40                                       | 7.00   | 50                      | 9.2   | 326.1                                   | 5000  | X   |
| 3KP6.0A           | 3KP6.0CA         | 6.0                                     | 6.67                                       | 7.37   | 50                      | 10.3  | 291.3                                   | 5000  | X   |
| 3KP6.5A           | 3KP6.5CA         | 6.5                                     | 7.22                                       | 7.98   | 50                      | 11.2  | 267.9                                   | 2000  | X   |
| 3KP7.0A           | 3KP7.0CA         | 7.0                                     | 7.78                                       | 8.60   | 50                      | 12.0  | 250.0                                   | 1000  | X   |
| 3KP7.5A           | 3KP7.5CA         | 7.5                                     | 8.33                                       | 9.21   | 5                       | 12.9  | 232.6                                   | 250   | X   |
| 3KP8.0A           | 3KP8.0CA         | 8.0                                     | 8.89                                       | 9.83   | 5                       | 13.6  | 220.6                                   | 150   | X   |
| 3KP8.5A           | 3KP8.5CA         | 8.5                                     | 9.44                                       | 10.40  | 5                       | 14.4  | 208.3                                   | 50  | X   |
| 3KP9.0A           | 3KP9.0CA         | 9.0                                     | 10.00                                      | 11.10  | 5                       | 15.4  | 194.8                                   | 20  | X   |
| 3KP10A            | 3KP10CA          | 10.0                                    | 11.10                                      | 12.30  | 5                       | 17.0  | 176.5                                   | 15  | X   |
| 3KP11A            | 3KP11CA          | 11.0                                    | 12.20                                      | 13.50  | 5                       | 18.2  | 164.8                                   | 2   | X   |
| 3KP12A            | 3KP12CA          | 12.0                                    | 13.30                                      | 14.70  | 5                       | 19.9  | 150.8                                   | 2   | X   |
| 3KP13A            | 3KP13CA          | 13.0                                    | 14.40                                      | 15.90  | 5                       | 21.5  | 139.5                                   | 2   | X   |
| 3KP14A            | 3KP14CA          | 14.0                                    | 15.60                                      | 17.20  | 5                       | 23.2  | 129.3                                   | 2   | X   |
| 3KP15A            | 3KP15CA          | 15.0                                    | 16.70                                      | 18.50  | 5                       | 24.4  | 123.0                                   | 2   | X   |
| 3KP16A            | 3KP16CA          | 16.0                                    | 17.80                                      | 19.70  | 5                       | 26.0  | 115.4                                   | 2   | X   |
| 3KP17A            | 3KP17CA          | 17.0                                    | 18.90                                      | 20.90  | 5                       | 27.6  | 108.7                                   | 2   | X   |
| 3KP18A            | 3KP18CA          | 18.0                                    | 20.00                                      | 22.10  | 5                       | 29.2  | 102.7                                   | 2   | X   |
| 3KP20A            | 3KP20CA          | 20.0                                    | 22.20                                      | 24.50  | 5                       | 32.4  | 92.6                                    | 2   | X   |
| 3KP22A            | 3KP22CA          | 22.0                                    | 24.40                                      | 26.90  | 5                       | 35.5  | 84.5                                    | 2   | X   |
| 3KP24A            | 3KP24CA          | 24.0                                    | 26.70                                      | 29.50  | 5                       | 38.9  | 77.1                                    | 2   | X   |
| 3KP26A            | 3KP26CA          | 26.0                                    | 28.90                                      | 31.90  | 5                       | 42.1  | 71.3                                    | 2   | X   |
| 3KP28A            | 3KP28CA          | 28.0                                    | 31.10                                      | 34.40  | 5                       | 45.4  | 66.1                                    | 2   | X   |
| 3KP30A            | 3KP30CA          | 30.0                                    | 33.30                                      | 36.80  | 5                       | 48.4  | 62.0                                    | 2   | X   |
| 3KP33A            | 3KP33CA          | 33.0                                    | 36.70                                      | 40.60  | 5                       | 53.3  | 56.3                                    | 2   | X   |
| 3KP36A            | 3KP36CA          | 36.0                                    | 40.00                                      | 44.20  | 5                       | 58.1  | 51.6                                    | 2   | X   |
| 3KP40A            | 3KP40CA          | 40.0                                    | 44.40                                      | 49.10  | 5                       | 64.5  | 46.5                                    | 2   | X   |
| 3KP43A            | 3KP43CA          | 43.0                                    | 47.80                                      | 52.80  | 5                       | 69.4  | 43.2                                    | 2   | X   |
| 3KP45A            | 3KP45CA          | 45.0                                    | 50.00                                      | 55.30  | 5                       | 72.7  | 41.3                                    | 2   | X   |
| 3KP48A            | 3KP48CA          | 48.0                                    | 53.30                                      | 58.90  | 5                       | 77.4  | 38.8                                    | 2   | X   |
| 3KP51A            | 3KP51CA          | 51.0                                    | 56.70                                      | 62.70  | 5                       | 82.4  | 36.4                                    | 2   | X   |
| 3KP54A            | 3KP54CA          | 54.0                                    | 60.00                                      | 66.30  | 5                       | 87.1  | 34.4                                    | 2   | X   |
| 3KP58A            | 3KP58CA          | 58.0                                    | 64.40                                      | 71.20  | 5                       | 93.6  | 32.1                                    | 2   | X   |
| 3KP60A            | 3KP60CA          | 60.0                                    | 66.70                                      | 73.70  | 5                       | 96.8  | 31.0                                    | 2   | X   |
| 3KP64A            | 3KP64CA          | 64.0                                    | 71.10                                      | 78.60  | 5                       | 103.0   | 29.1                                    | 2   | X   |
| 3KP70A            | 3KP70CA          | 70.0                                    | 77.80                                      | 86.00  | 5                       | 113.0   | 26.5                                    | 2   | X   |
| 3KP75A            | 3KP75CA          | 75.0                                    | 83.30                                      | 92.10  | 5                       | 121.0   | 24.8                                    | 2   | X   |
| 3KP78A            | 3KP78CA          | 78.0                                    | 86.70                                      | 95.80  | 5                       | 126.0   | 23.8                                    | 2   | X   |
| 3KP85A            | 3KP85CA          | 85.0                                    | 94.40                                      | 104.00 | 5                       | 137.0   | 21.9                                    | 2   | X   |
| 3KP90A            | 3KP90CA          | 90.0                                    | 100.00                                     | 111.00 | 5                       | 146.0   | 20.5                                    | 2   | X   |
| 3KP100A           | 3KP100CA         | 100.0                                   | 111.00                                     | 123.00 | 5                       | 162.0   | 18.5                                    | 2   | X   |
| 3KP110A           | 3KP110CA         | 110.0                                   | 122.00                                     | 135.00 | 5                       | 177.0   | 16.9                                    | 2   | X   |
| 3KP120A           | 3KP120CA         | 120.0                                   | 133.00                                     | 147.00 | 5                       | 193.0   | 15.5                                    | 2   | X   |
| 3KP130A           | 3KP130CA         | 130.0                                   | 144.00                                     | 159.00 | 5                       | 209.0   | 14.4                                    | 2   | X   |
| 3KP150A           | 3KP150CA         | 150.0                                   | 167.00                                     | 185.00 | 5                       | 243.0   | 12.3                                    | 2   | X   |
| 3KP160A           | 3KP160CA         | 160.0                                   | 178.00                                     | 197.00 | 5                       | 259.0   | 11.6                                    | 2   | X   |
| 3KP170A           | 3KP170CA         | 170.0                                   | 189.00                                     | 209.00 | 5                       | 275.0   | 10.9                                    | 2   | X   |
| 3KP180A           | 3KP180CA         | 180.0                                   | 200.00                                     | 221.00 | 5                       | 289.0   | 10.4                                    | 2   | X   |
| 3KP190A           | 3KP190CA         | 190.0                                   | 211.00                                     | 233.00 | 5                       | 310.0   | 9.7                                     | 2   | X   |
| 3KP200A           | 3KP200CA         | 200.0                                   | 222.00                                     | 246.00 | 5                       | 329.2   | 9.1                                     | 2   | X   |
| 3KP210A           | 3KP210CA         | 210.0                                   | 233.00                                     | 258.00 | 5                       | 349.5   | 8.6                                     | 2   | X   |
| 3KP220A           | 3KP220CA         | 220.0                                   | 244.00                                     | 270.00 | 5                       | 371.1   | 8.1                                     | 2   | X   |

For parts without A, the  $V_{BR}$  is  $\pm 10\%$  and  $V_C$  is 5% higher than with A parts

For bidirectional type having  $V_R$  of 10 volts and less, the  $I_R$  limit is double.


**I-V Curve Characteristics**

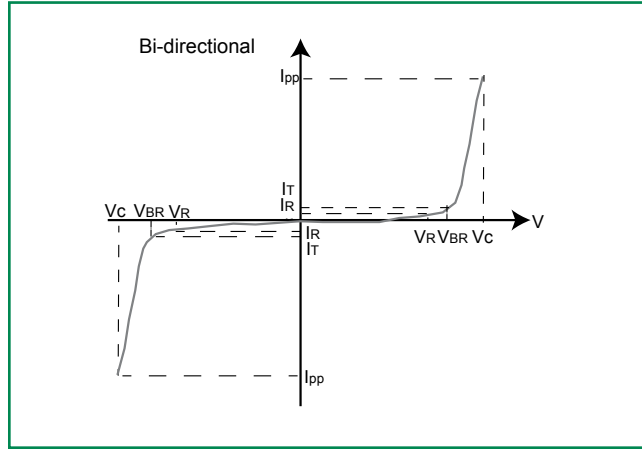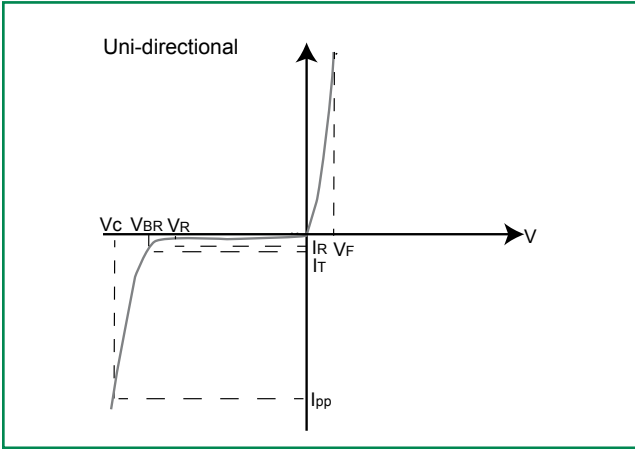


- $P_{PPM}$  Peak Pulse Power Dissipation** – Max power dissipation
- $V_s$  Stand-off Voltage** – Maximum voltage that can be applied to the TVS without operation
- $V_{BR}$  Breakdown Voltage** – Maximum voltage that flows through the TVS at a specified test current ( $I_T$ )
- $V_C$  Clamping Voltage** – Peak voltage measured across the TVS at a specified  $I_{ppm}$  (peak impulse current)
- $I_R$  Reverse Leakage Current** – Current measured at  $V_R$
- $V_F$  Forward Voltage Drop for Uni-directional**

**Ratings and Characteristic Curves** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

**Figure 1 - TVS Transients Clamping Waveform**

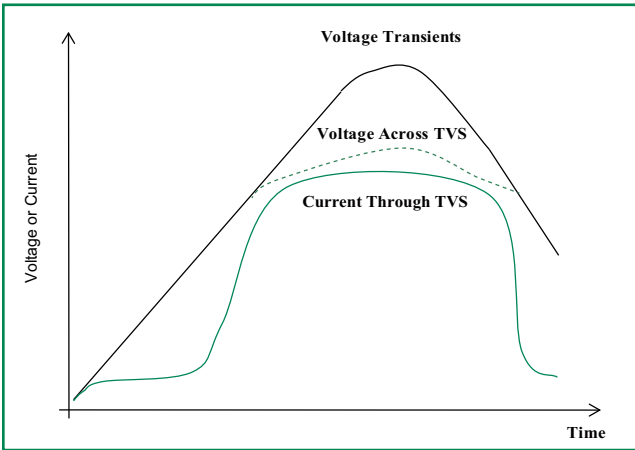


**Figure 2 - Peak Pulse Power Rating Curve**

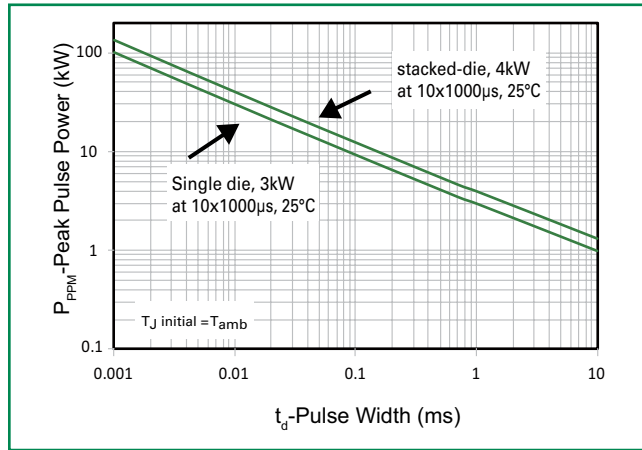


continues on next page.

### Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)


**Figure 3 - Peak Pulse Power Derating Curve**

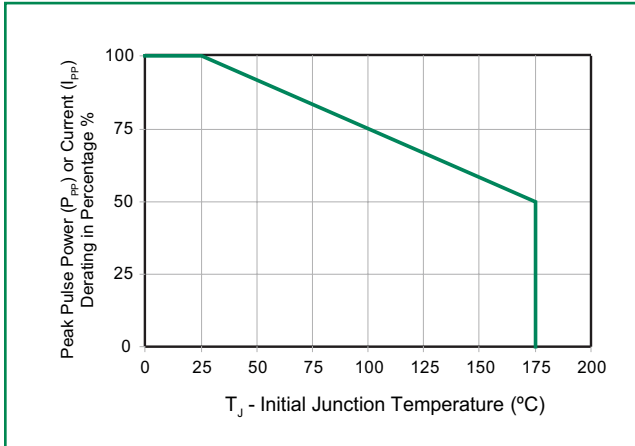


**Figure 4 - Pulse Waveform**

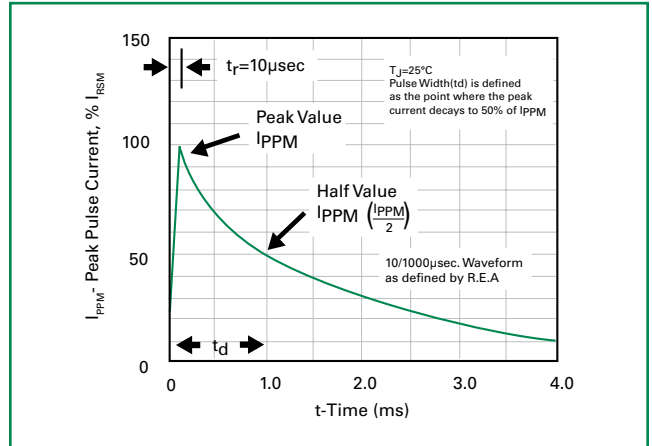


**Figure 5 - Typical Junction Capacitance**

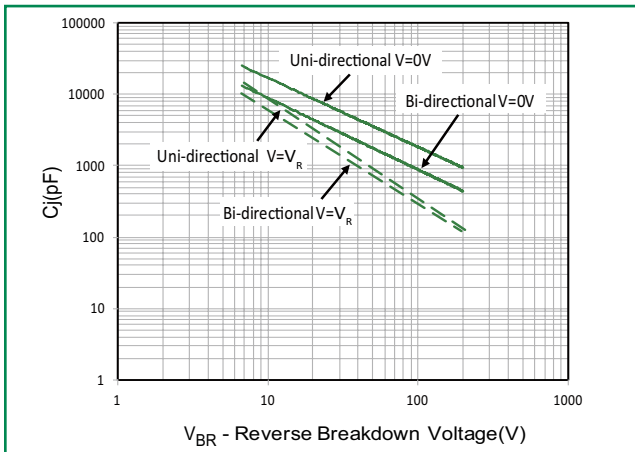


**Figure 6 - Typical Transient Thermal Impedance**

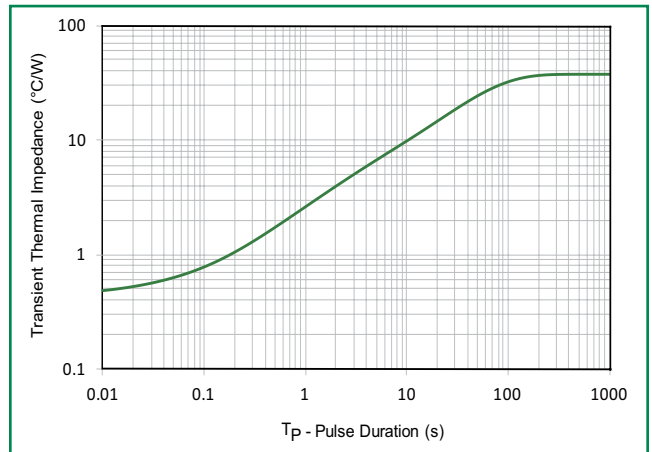

**Figure 7 - Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only**

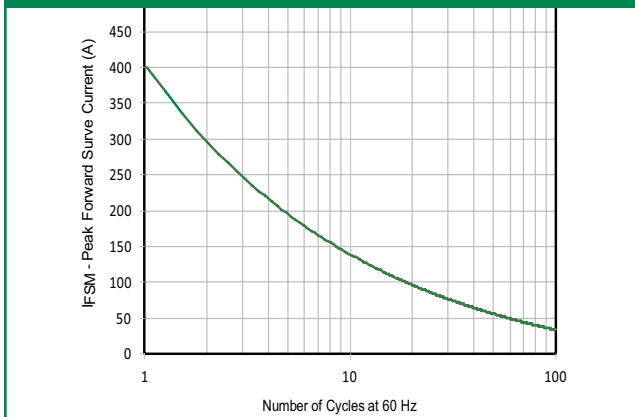


**Figure 8 - Peak Forward Voltage Drop vs Peak Forward Current (Typical Values)**

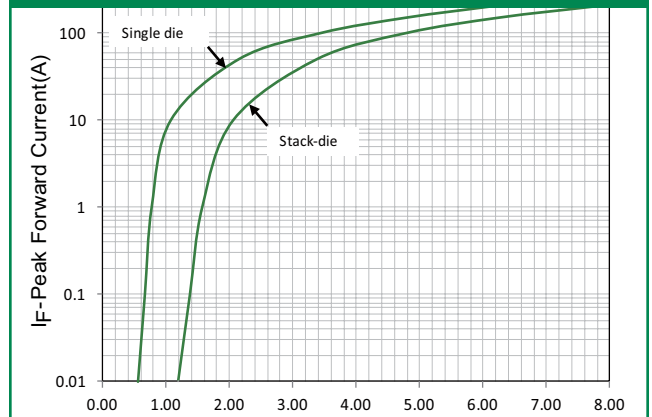

### Soldering Parameters

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Lead-free assembly      |
| Pre Heat   | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|  | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp ( $T_A$ ) to peak) |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_A$ - Ramp-up Rate                   |                                    | 3°C/second max          |
| Reflow   | - Temperature ( $T_A$ ) (Liquidus) | 217°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate   |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed  |                                    | 260°C                   |

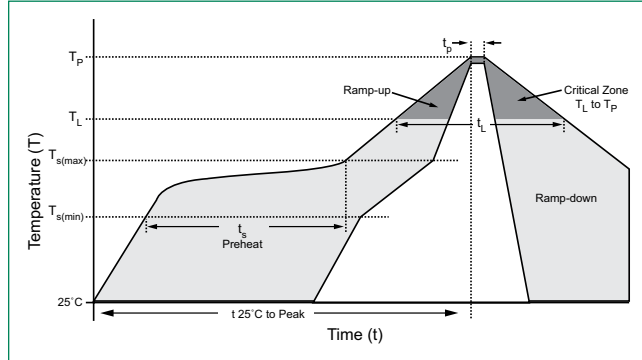

### Flow/Wave Soldering (Solder Dipping)

|                           |            |
|---------------------------|------------|
| <b>Peak Temperature :</b> | 265°C      |
| <b>Dipping Time :</b>     | 10 seconds |
| <b>Soldering :</b>        | 1 time     |


### Physical Specifications

|                 |  |
|-----------------|--|
| <b>Weight</b>   | 0.07oz., 2.1g                                      |
| <b>Case</b>     | P600 molded plastic body over passivated junction. |
| <b>Polarity</b> | Color band denotes the cathode except Bipolar.     |
| <b>Terminal</b> | Matte Tin axial leads, solderable per JESD22-B102. |

### Environmental Specifications

|                            |             |
|----------------------------|-------------|
| <b>High Temp. Storage</b>  | JESD22-A103 |
| <b>HTRB</b>                | JESD22-A108 |
| <b>Temperature Cycling</b> | JESD22-A104 |
| <b>H3TRB</b>               | JESD22-A101 |
| <b>RSH</b>                 | JESD22-B106 |


### Dimensions

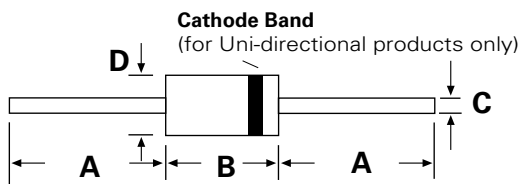


**P600**

| Dimensions | Inches |       | Millimeters |      |
|------------|--------|-------|-------------|------|
|            | Min    | Max   | Min         | Max  |
| A          | 1.000  | -     | 25.40       | -    |
| B          | 0.340  | 0.360 | 8.60        | 9.10 |
| C          | 0.048  | 0.052 | 1.22        | 1.32 |
| D          | 0.340  | 0.360 | 8.60        | 9.10 |

### Part Numbering System

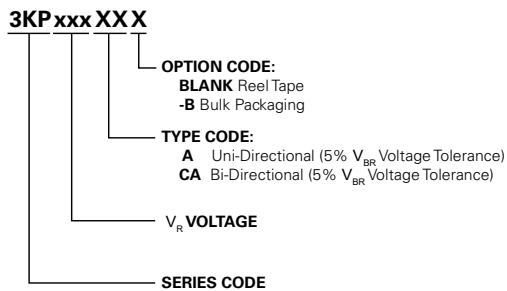


### Part Marking System

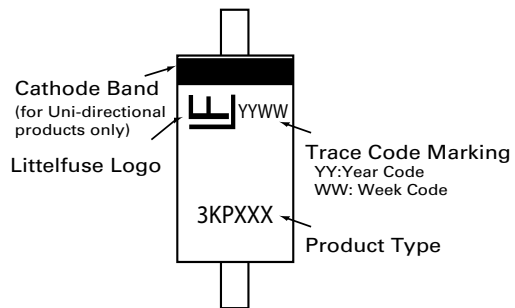

### Packing Options



| Part Number | Component Package | Quantity | Packaging Option | Packaging Specification |
|-------------|-------------------|----------|------------------|-------------------------|
| 3KPxxxXX    | P600              | 800      | Tape & Reel      | EIA STD RS-296          |
| 3KPxxxXX-B  | P600              | 100      | BULK             | Littelfuse Spec.        |
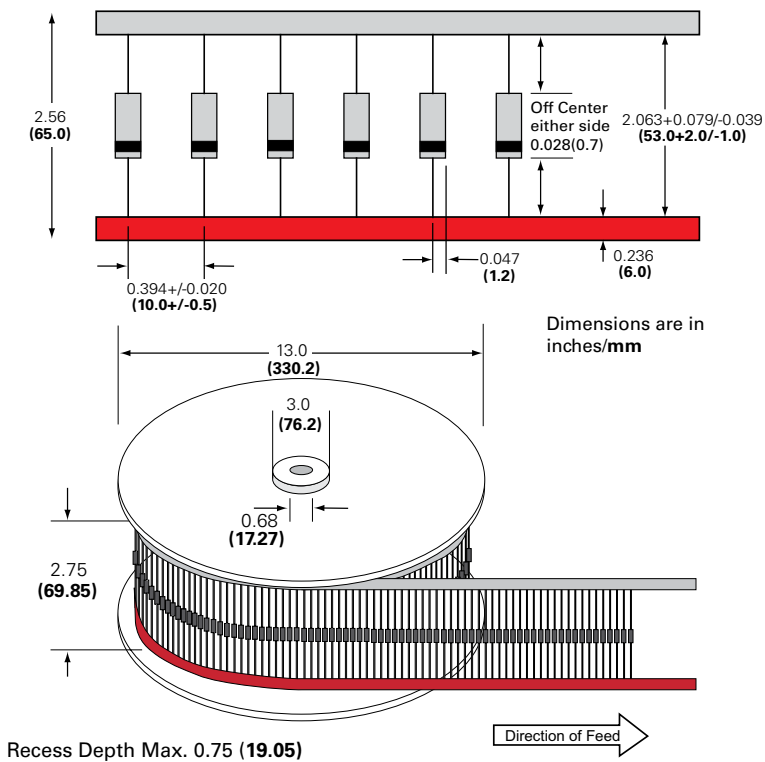
### Tape and Reel Specification



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 3KP58A-B on WIN SOURCE](#)
-  [Littelfuse Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management