




**THE DATASHEET OF  
PE-65662T**



# T3/DS3/E3/STS-1 TRANSFORMERS

Designed for T3, DS3, E3 and  
STS-1 Interfaces

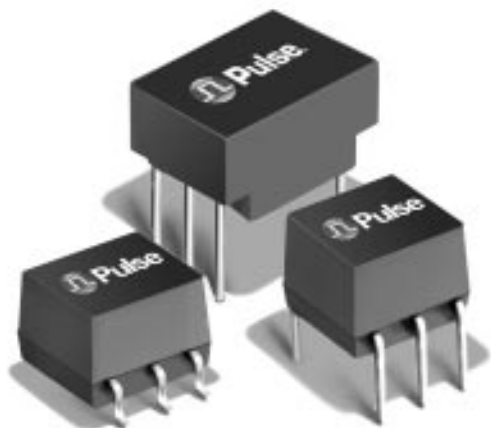

- Return loss meets requirements of G.703
- Fast rise time compatible with standards
- Through hole and surface mount packages available
- Models with 1500 Vrms isolation and 3000 Vrms reinforced insulation per BAPT EN41003/EN60950

### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number	Turns Ratio (±2%)	OCL Primary (μH MIN)	OCL at -40°C (μH MIN)	L <sub>L</sub> (μH MAX)	C <sub>w/w</sub> (pF MAX)	Bandwidth 75 Ω System (MHz TYP)	Isolation Voltage (Vrms MIN)	Package/Schematic	Primary Pins
PE-65661	1:2CT	35	20	.12	10	—	1500	TR-2/B SMT	2-6
PE-65662	1:1	45	30	.12	13	—	1500	TR-2/A SMT	2-6
PE-65663	1:1	40	30	.12	13	—	1500	QC-1/A THT	2-6
PE-65664	1:2CT	35	20	.12	10	—	1500	QC-1/B THT	2-6
PE-65779	1:4CT	150	—	.30	15	—	1500	QC-1/B THT	2-6
PE-65856	1:1.73CT	50	—	.10	12	.060-300	1500	LC-1/C THT	4-6
PE-65966	1:1	40	—	.10	10	.200-340	1500	LC-1/E THT	4-6
PE-65967	1:1	40	—	.10	10	.200-340	1500	LS-1/E SMT	4-6
PE-65968	1:2CT	19	—	.06	10	.250-500	1500	LS-1/C SMT	4-6
PE-65969	1:2CT	19	—	.06	10	.250-500	1500	LC-1/C THT	4-6
PE-68629	1:1	40	—	.10	5	—	3000 <sup>4</sup>	HC-1/A THT	1-5
PE-68630	1:2CT	19	—	.06	10	—	3000 <sup>4</sup>	HC-1/D THT	1-5

### Electrical Specifications @ 25°C

Part Number	Turns Ratio (Pri:Sec ±5%)	OCL @ 25°C (mH MIN)	C <sub>w/w</sub> (pF MAX)	L <sub>L</sub> (μH MAX)	DCR Pri (Ω MAX)	DCR Sec (Ω MAX)	Isolation Voltage (Vrms MIN)	Package/Schematic	Primary Pins
PE-64934	1:1	1.20	25	0.50	0.70	0.70	1500	HC-1/1S	1-2

### Packaging Information

Package	Type	Part Weight	Parts/Tube	Parts/Reel	Reel Diameter	Tape Width	Pitch
LS-1	SMT	0.6 grams	70	600	13 inches	24 mm	16 mm
TR-2	SMT	0.6 grams	65	500	13 inches	24 mm	16 mm
LC-1	THT	0.6 grams	65	—	—	—	—
HC-1	THT	1.2 grams	60	—	—	—	—
QC-1	THT	0.8 grams	60	—	—	—	—

# T3/DS3/E3/STS-1 TRANSFORMERS



Designed for T3, DS3, E3 and  
STS-1 Interfaces



## Mechanicals

## Schematics



TR-2

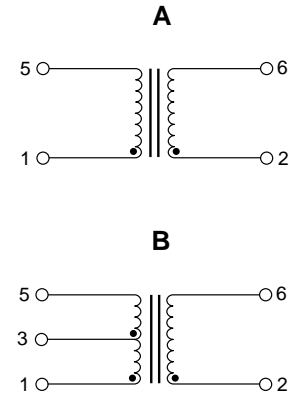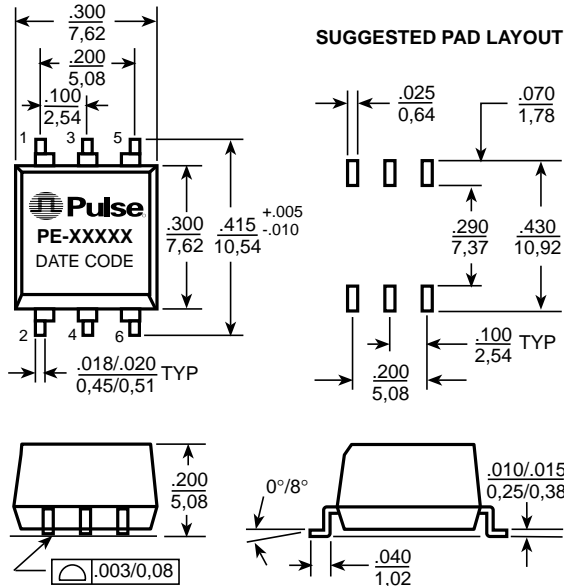

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified all tolerances are  $\pm \frac{.010}{0,25}$

QC-1

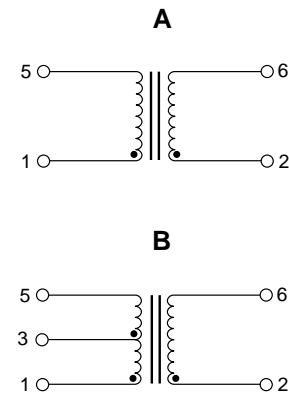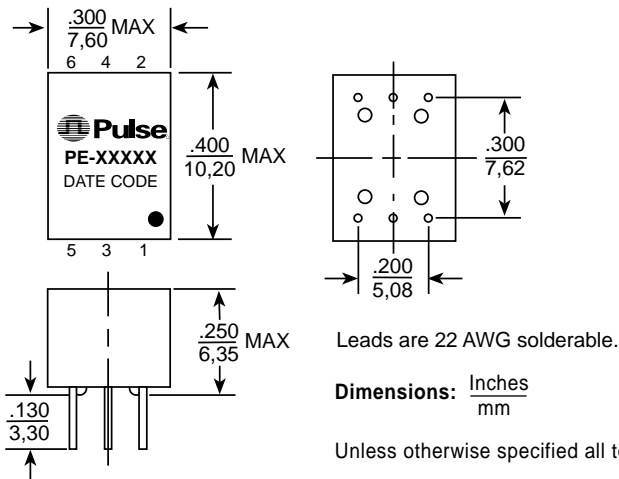


# T3/DS3/E3/STS-1 TRANSFORMERS

Designed for T3, DS3, E3 and  
STS-1 Interfaces





## Mechanicals

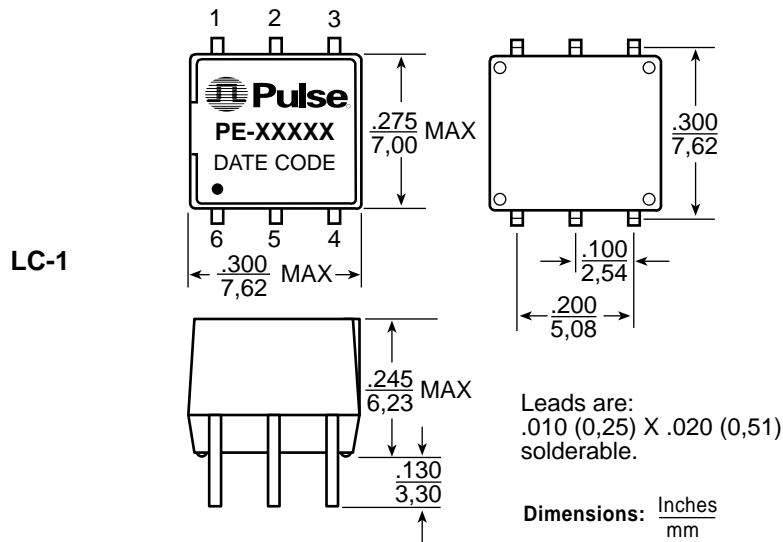


Unless otherwise specified all tolerances are  $\pm \frac{.010}{0,25}$

## Schematics

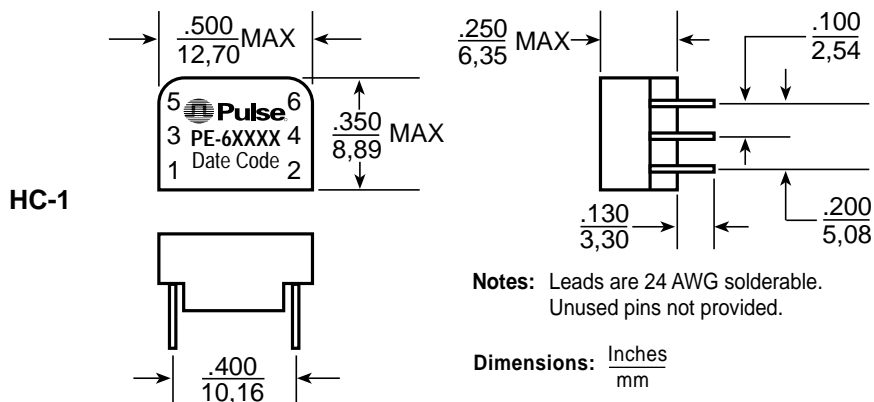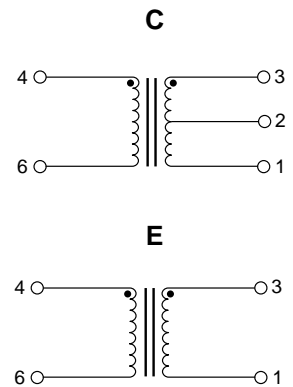

Unless otherwise specified all tolerances are  $\pm \frac{.010}{0,25}$

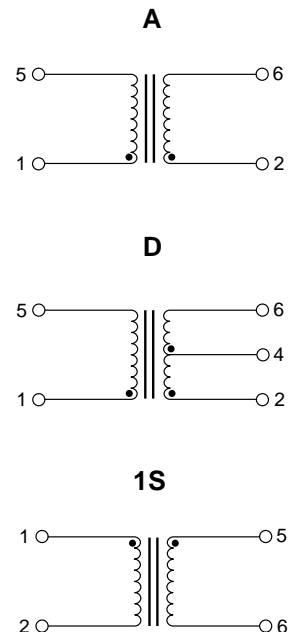


# T3/DS3/E3/STS-1 TRANSFORMERS


## Designed for T3, DS3, E3 and STS-1 Interfaces



### Mechanicals

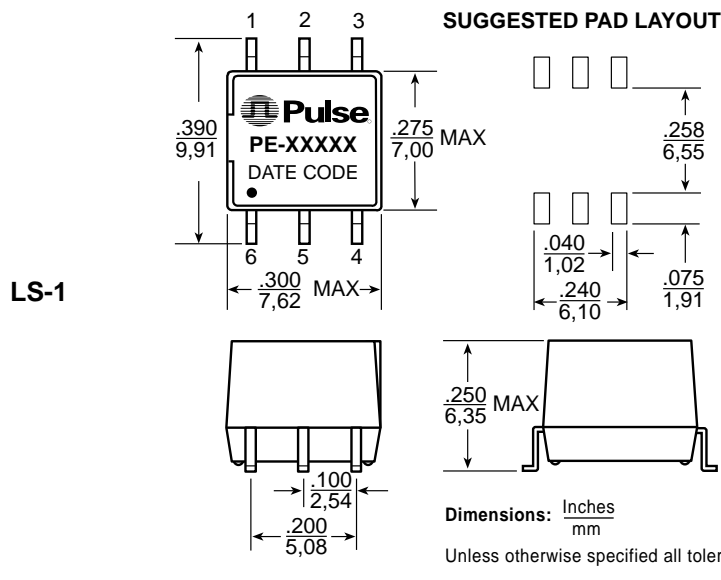

### Schematics

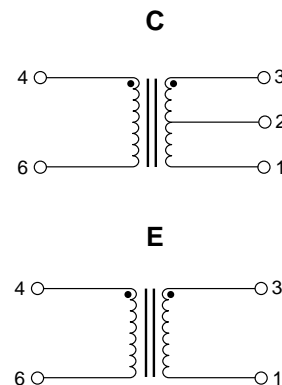

### Transformer Selection Guide

Chip Manufacturer	Surface Mount		Through Hole (1500 Vrms)		Through Hole (3000 Vrms)	
	Transmit	Receive	Transmit	Receive	Transmit	Receive
AT&T/Lucent T7296	PE-65967	-	PE-65966	-	PE-68629	-
Exar XR-T7296	PE-65967	-	PE-65966	-	PE-68629	-
<b>ilicon Systems</b>						
SSI 78P236, DS3	PE-65968	PE-65967	PE-65969	PE-65966	PE-68630	PE-68629
SSI 78P7200, DS3	PE-65968	PE-65967	PE-65969	PE-65966	PE-68630	PE-68629
SSI 78P7200, E3	PE-65968	PE-65968	PE-65969	PE-65969	PE-68630	PE-68630
SSI 78P2361, STS-1	PE-65968	PE-65967	PE-65969	PE-65966	PE-68630	PE-68629
SSI 78P2362, E3	PE-65968	PE-65967	PE-65969	PE-65966	PE-68630	PE-68629
<b>Transwitch</b>						
MRT TXC-02050 <sup>5</sup> , E3	PE-65968	PE-65967	PE-65969	PE-65966	PE-68630	PE-68629
ART 02020 DS3, STS-1	PE-65967	PE-65967	PE-65966	PE-65966	PE-68629	PE-68629

### Application Notes

- The transformers have been developed for use as transmit and receive transformers in T3 or DS3 links, using bit rates of 44.736 Mbps and B3ZS coding on coaxial cable. The characteristics allow compliance with the pulse templates of CCITT G.703 as well as ATT T.A.34. The transformers are also suitable for the E3 interface at 34.368 Mbps with HDB3 coding or STS-1 applications, at 51.84 Mbps according to Bellcore TANWT-000253. The LC-1 and QC-1 packages are pin compatible with T1-1 and T4-1 6-pin DIP packages.
- Bandwidth specifications are typical in a 75  $\Omega$  system. Return loss meets the requirements of G.703. Materials used in the products are UL94-V0 recognized. Products meet the requirements of IEC 695-2-2 (Needle Flame Test).
- The surface mount LS-1 and TR-2 packages are available with optional tape and reel packaging. To order, add a "T" suffix to the part number (i.e.: PE-65967T).
- PE-68629 and PE-68830 are approved for reinforced insulation per BABT EN41003/EN60950, Cert. CR0079.
- The Transwitch MRT TXC-02050 chip is also designed to operate in 6.312 and 8.448 Mbps interfaces. A 1:1 transformer (PE-64934) is recommended.

### For More Information :

#### Corporate

12220 World Trade Drive  
San Diego, CA 92128  
Tel: 619 674 8100  
FAX: 619 674 8262  
http://www.pulseeng.com  
Quick-Facts: 619 674 9672

#### Europe

Dunmore Road  
Tuam  
County Galway  
Ireland  
Tel: 353 93 24107  
FAX: 353 93 24459

#### Asia

Block 3027  
Ubi Road 1  
#03-120  
Singapore 408720  
Tel: 65 741 5227  
FAX: 65 741 3013

#### Distributor

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PE-65662T on WIN SOURCE](#)

 [Pulse Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management